ARCHITECTURAL RECORD

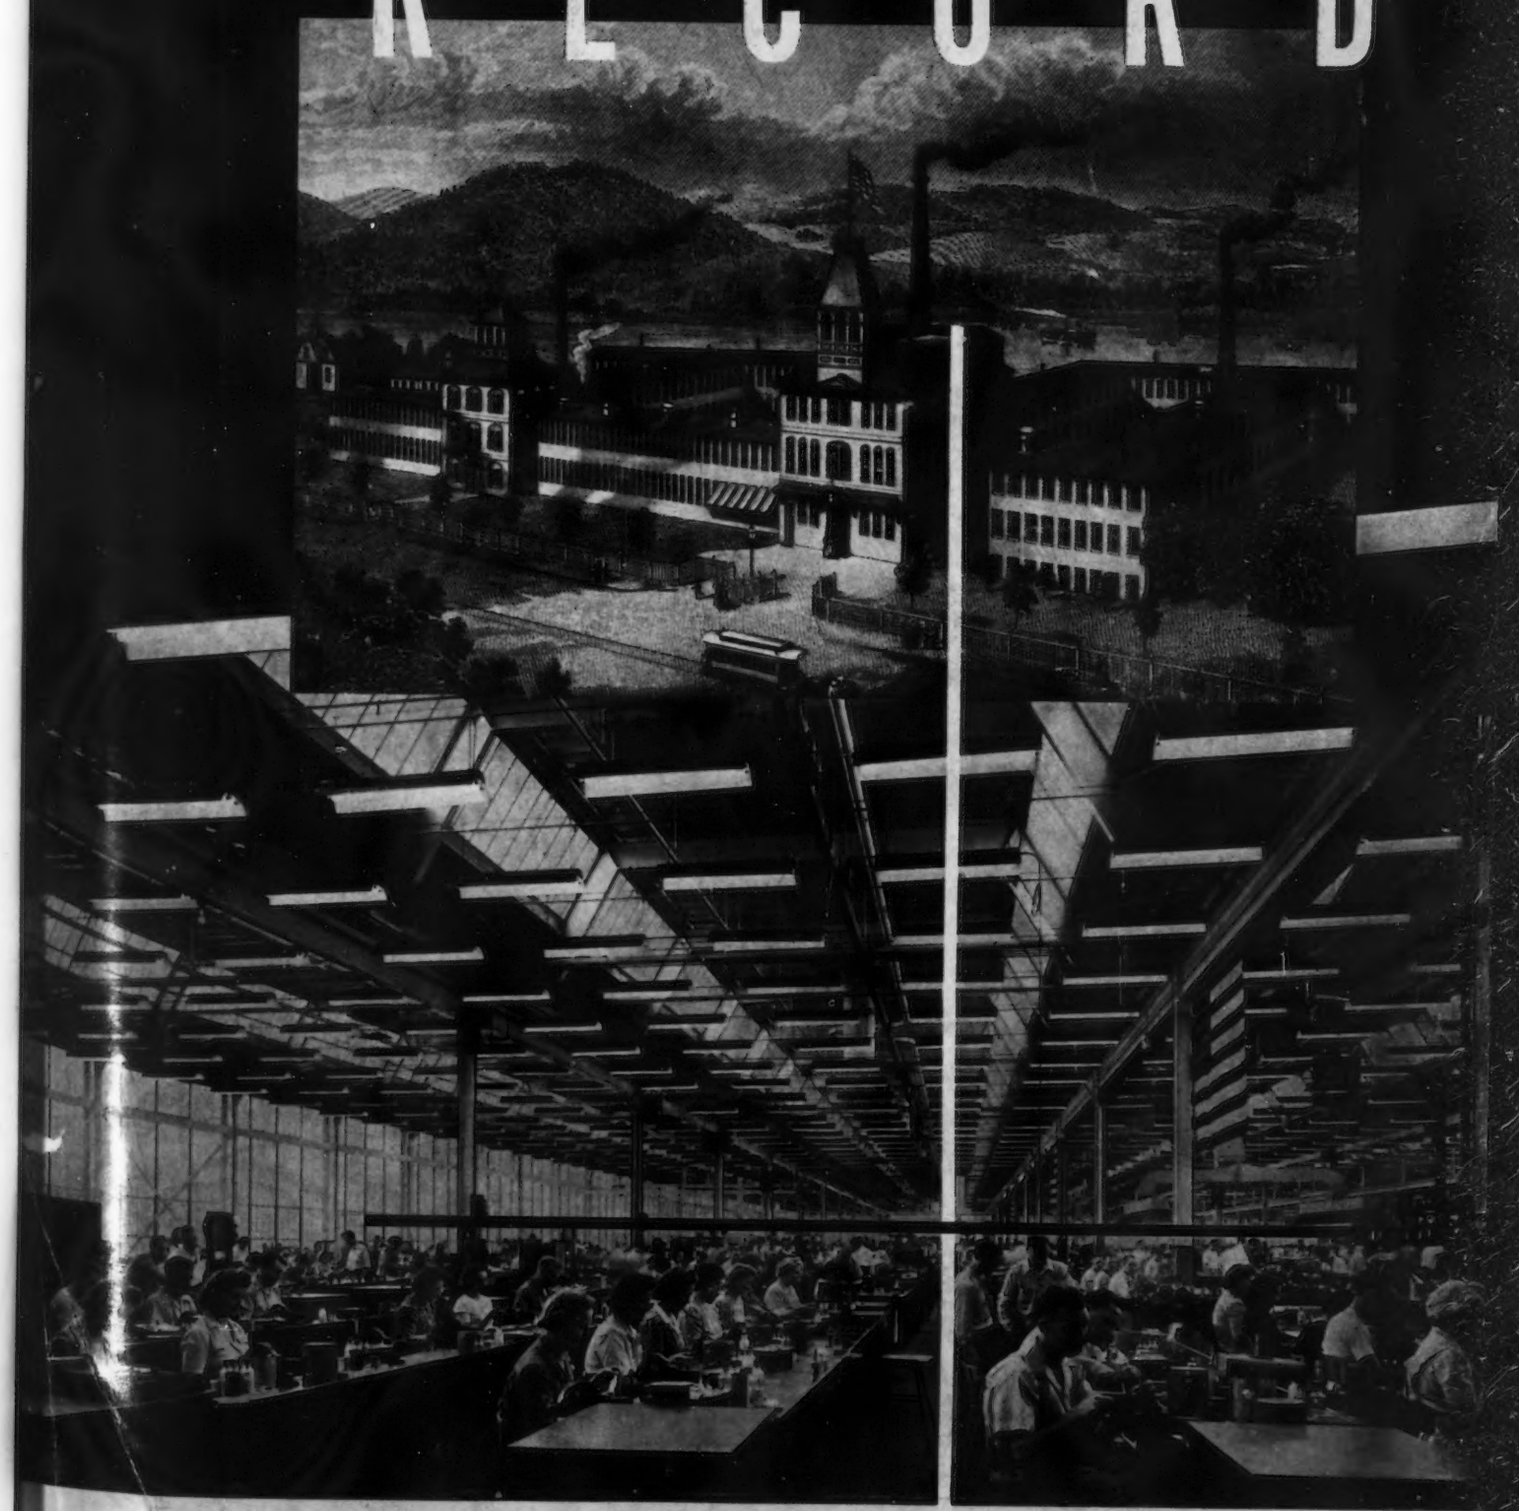

INDUSTRIAL BUILDINGS

DECEMBER 1946

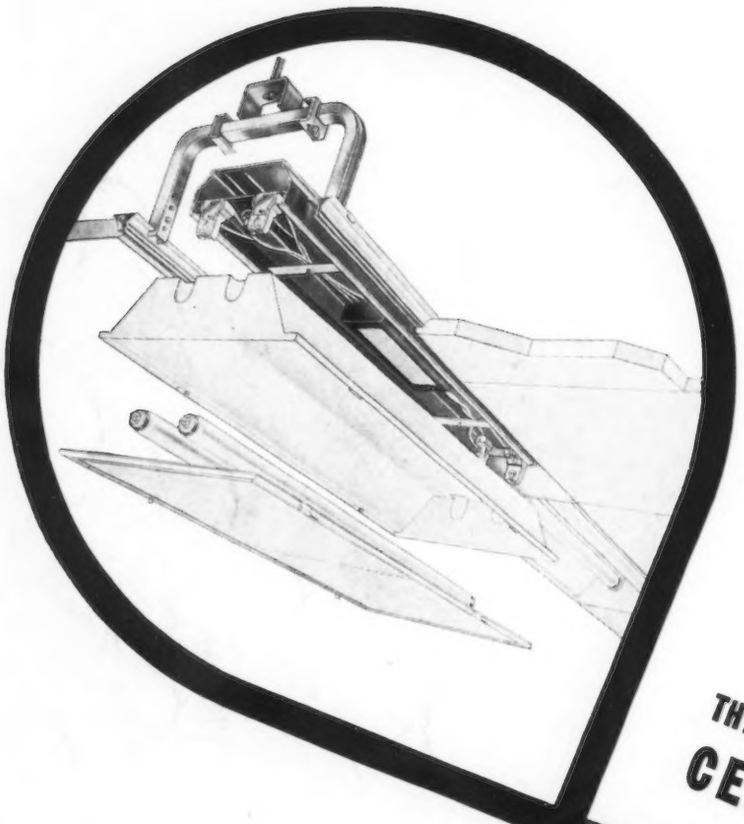

Installed in a commercial area of any size — the MILLER FLUORESCENT TROFFER LIGHTING SYSTEM gives you (1) perfect light for easy-seeing; and (2) a distinctive, impressive ceiling treatment. Good lighting is made an integral part of the architecture! Furthermore, you get a saving! The continuous wireway channels reduce wiring costs, conduit and conduit fitting costs, from 50% to 80%. The patented Miller Ceiling Furring Hanger improves and simplifies installation. The versatility of application of the Troffer System offers limitless design opportunity — CEILINGS UNLIMITED — while fulfilling its primary purpose — IDEAL LIGHTING.

THE LIGHTING SYSTEM THAT PROVIDES CEILINGS UNLIMITED

MILLER
SINCE 1844

THE MILLER COMPANY • MERIDEN, CONN.

ILLUMINATING DIVISION

ILLUMINATING DIVISION	ROLLING MILL DIVISION	FOUNDRY DIVISION	HEATING PRODUCTS DIVISION
Fluorescent, Incandescent Mercury Lighting Equipment	Phosphor Bronze and Brass in Sheets, Strips and Rolls	Non-Ferrous Metal Castings	Domestic Oil Burners and Liquid Fuel Devices

ARCHITECTURAL RECORD (Vol. 100, No. 6, December, 1946) is published monthly by F. W. Dodge Corp., 10 Ferry Street, Concord, N. H., with editorial and executive offices at 119 W. 40th St., New York 18, N. Y. $3 per year; Foreign, $5
Entered as second-class matter at the Post Office, Concord, N. H., under the Act of March 3, 1879.

COLD FACTS

ABOUT 'INCOR' WINTER ECONOMIES

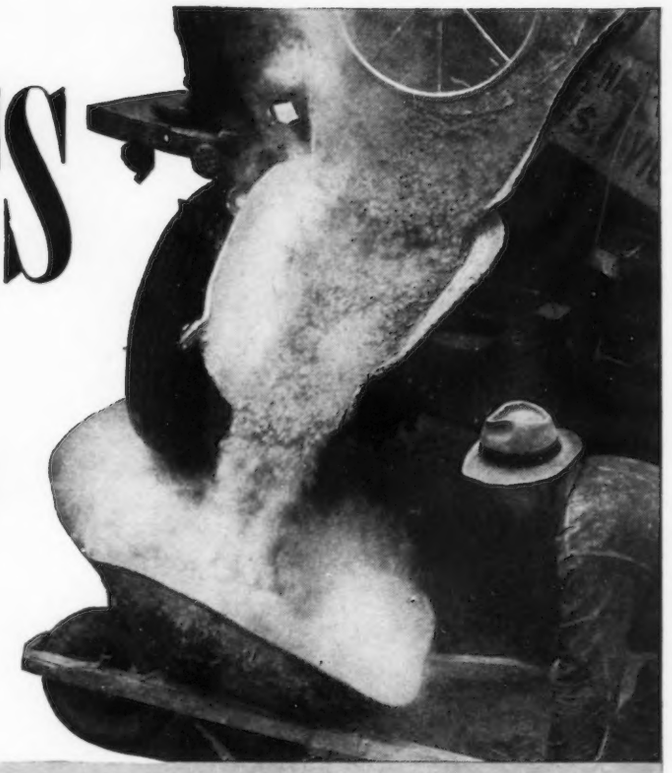

SKYROCKETING COSTS—form lumber, labor, heating fuel, tarpaulins—put a premium on job planning with 'Incor' 24-Hour Cement. At today's costs, 'Incor' savings are bigger than ever. Heat-cured only one day at 70°, 'Incor' concrete is service-strong, safe from freezing . . . and at 28 days produces strengths 25% to 30% greater than even Lone Star Cement cured 3 days. Use 'Incor'* and you save two days heat-curing on each pour . . . cut form and tarp costs in half . . . reduce freezing risks . . . keep job speed up, job costs down.

Illustrated book, "Cold Weather Concreting", will help you figure the most efficient schedule—copy on request to Lone Star Cement Corporation, 342 Madison Ave., New York 17.

*Reg. U. S. Pat. Off.

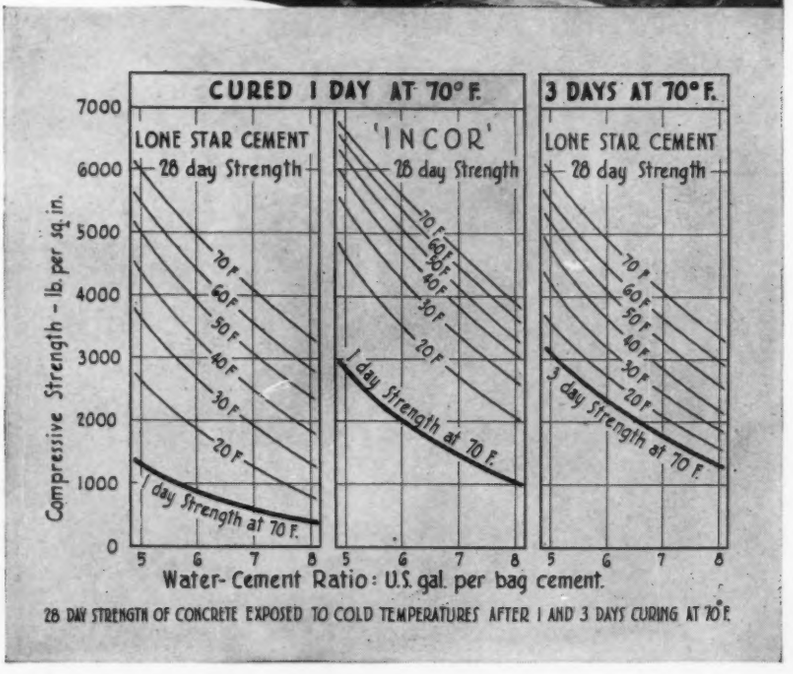

28 DAY STRENGTH OF CONCRETE EXPOSED TO COLD TEMPERATURES AFTER 1 AND 3 DAYS CURING AT 70° F.

LONE STAR CEMENT CORPORATION

Offices: ALBANY • BETHLEHEM, PA. • BIRMINGHAM
BOSTON • CHICAGO • DALLAS • HOUSTON
INDIANAPOLIS • JACKSON, MISS. • KANSAS CITY, MO.
NEW ORLEANS • NEW YORK • NORFOLK
PHILADELPHIA • ST. LOUIS • WASHINGTON, D. C.

LONE STAR CEMENT, WITH ITS SUBSIDIARIES, IS ONE OF THE WORLD'S LARGEST CEMENT PRODUCERS: 15 MODERN MILLS, 25,300,000 BARRELS ANNUAL CAPACITY

This "new quality of living"

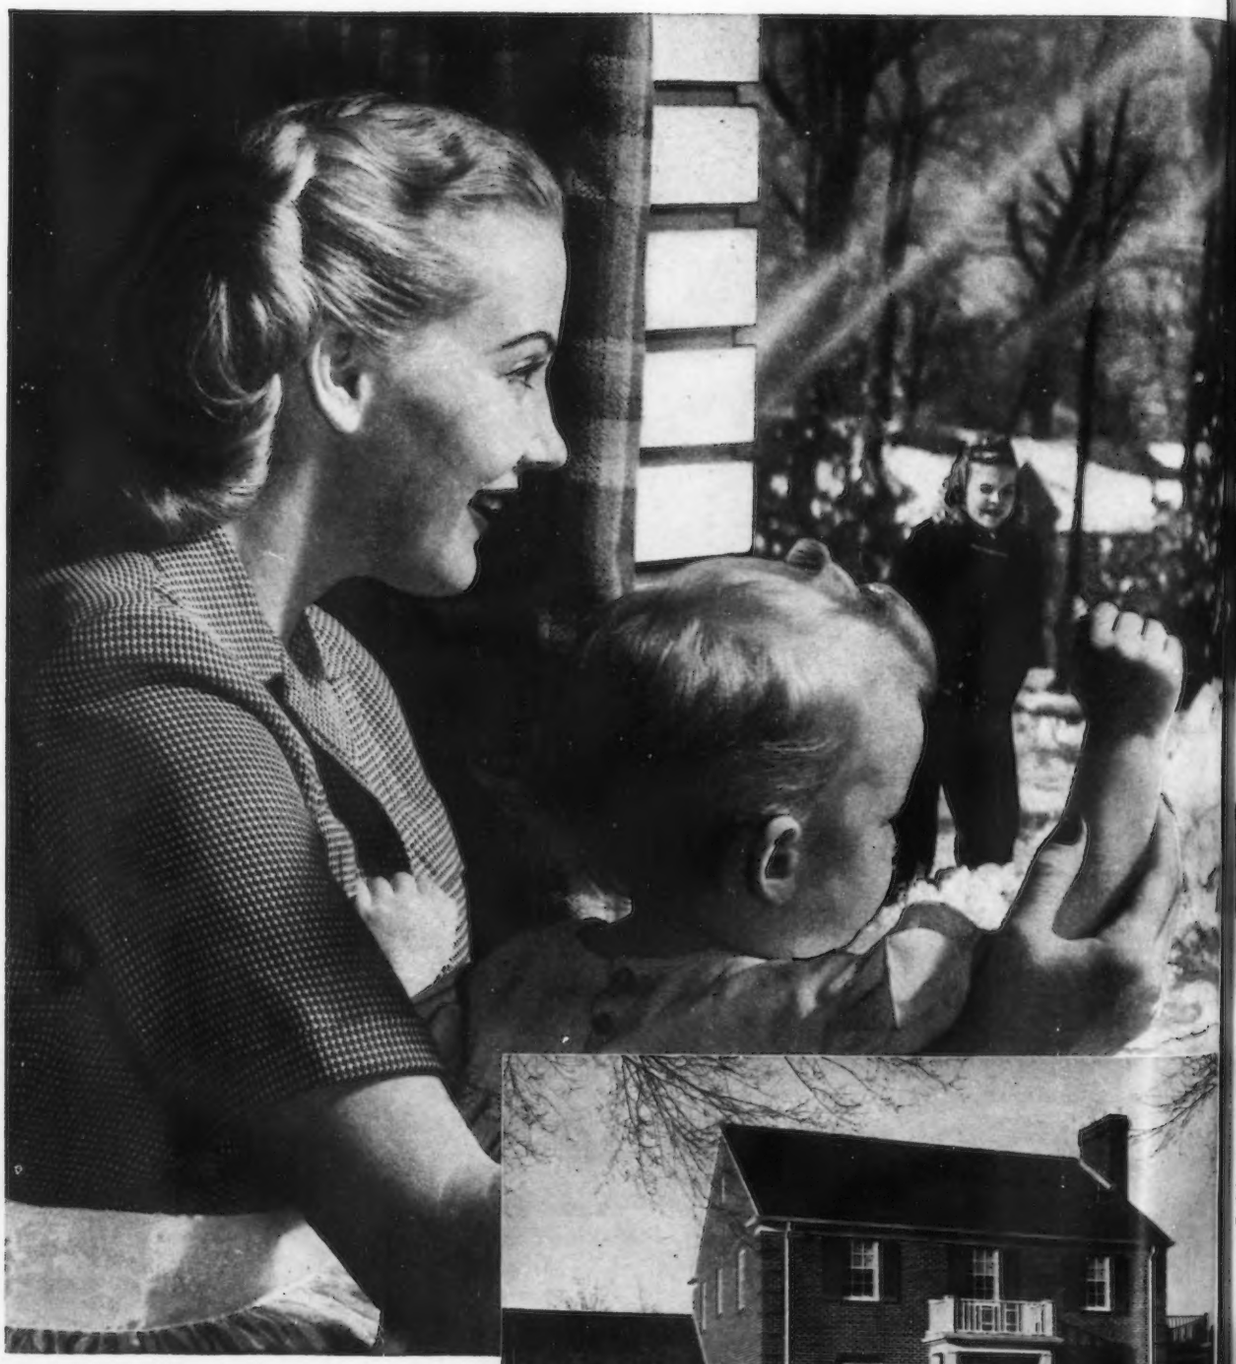

It's always spring indoors *in this modern home at Enid, Oklahoma. Servel* All-Year *Gas Air Conditioning has been providing "a new quality of living" here since 1941.*

TRIED . . . PROVED . . . SUCCESSFUL

From Boston to San Diego . . .
. . . From Bismarck to Miami

***The Servel* All-Year Gas Air Conditioner** is already operating successfully in hundreds of installations from coast to coast. Some have been running for more than four years. The equipment is tried, tested . . . and *approved* by users everywhere.

ng" increases home values

Comfort is greater, resale price higher with Servel All-Year Gas Air Conditioning

When you specify Servel *All-Year* Gas Air Conditioning, you make it possible for your client to select just the climate he wishes in his home the year round. With the touch of a fingertip he can enjoy cleaned, cooled, thoroughly dehumidified air—refreshing as a mountain breeze—all through the hottest, sultriest summer weather.

And when winter comes, he can flood his home with clean, draft-free, properly humidified warmth —without leaving his living room! Winter, summer, spring or fall, a simple fingertip adjustment of the Selectrol control is all that's required to produce the desired temperature and humidity indoors.

In providing home owners with this simple, efficient, and complete control of their indoor climate, you not only give them a wonderful "new quality of living," but you increase the investment value of their homes. Leading mortgage loan officers all over the country agree that no matter what other new developments in homebuilding are perfected during the next ten or twenty years, homes equipped with the Servel unit will still be up-to-date. And consequently will command a higher resale price over a longer period of time.

For further information on the year-round comfort and investment values of the Servel *All-Year* Gas Air Conditioner, get in touch with your local Gas Company. Or write direct to Servel, Inc., 8612 Morton Ave., Evansville 20, Ind.

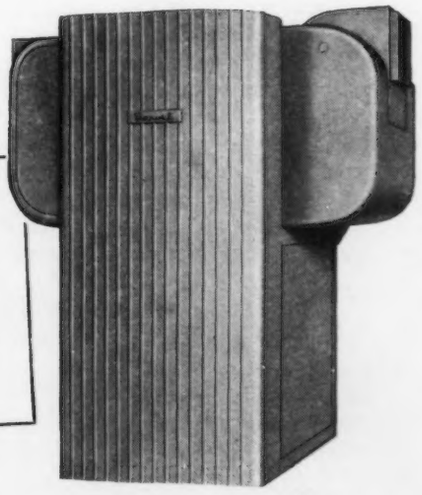

Servel

***All-Year* GAS AIR CONDITIONER**

To curb excessive maintenance...

Eight services are

BYERS WROUGHT IRON

The new $11,000,000 General Hospital recently completed at Houston, Texas, by the Navy Department, gives some splendid examples of "Preventive Engineering" as applied to the control of maintenance in corrosive piping services. Piping materials were carefully matched to conditions.

The project comprises a total of 37 buildings. In the principal buildings, galvanized wrought iron was used for downspouts and underground gas lines, and black wrought iron for the concealed steam supply lines and steam return lines.

In the balance of the project, including 14 one-story ward buildings, store building, power plant, shop building, greenhouse, three residences, gate house, officers quarters, steam tunnels, water distribution system, swimming pool and site improvements, wrought iron was specified in a number of services. The interior downspouts, underground sanitary piping 1½-in. and smaller, air lines, underground water lines 3-in. and smaller, underground sprinkler system piping, and all hot and cold water lines within buildings were galvanized wrought iron. Steam supply lines in concealed or furred space, exposed steam return lines, and underground gas lines, were black wrought iron. The steam returns in concealed or furred locations were extra heavy wrought iron.

With maintenance and repair costs rising, the only protection against excessive future maintenance is to use materials that will last. Wrought Iron is unusually resistive to corrosion, because of its unique structure. The tiny fibers of silicate slag threaded through the high-purity iron body, halt and diffuse attack. The fibers also help to anchor the initial protective scale, which shields the underlying metal.

Our Engineering Service Department is always ready to suggest those places where wrought iron can be expected to last longest. You will find some excellent information on piping problems in our bulletin, "Wrought Iron for Piping Systems." Ask for a copy.

A. M. Byers Co., Pittsburgh, Pa. Established 1864. Boston, New York, Philadelphia, Washington, Atlanta, Chicago, St. Louis, Houston, Seattle, San Francisco.

"ETERNALLY YOURS"—professionally-produced 16mm sound motion picture. An entertaining saga of the wrought iron industry, available to technical groups. New, authentic, informative. Write Modern Talking Picture Service, Inc., 9 Rockefeller Plaza, N.Y. 20, N.Y.

CORROSION COSTS YOU MORE THAN WROUGHT IRON

BYERS
GENUINE WROUGHT IRON
TUBULAR AND HOT ROLLED PRODUCTS
ELECTRIC FURNACE ALLOY STEELS · OPEN HEARTH ALLOY STEELS
CARBON STEEL TUBULAR PRODUCTS

VOL. 100 • NO. 6 December 1946

COVER: Photo by Hedrich-Blessing; print courtesy The Bettmann Archive

ARCHITECTURAL

RECORD

F.W.DODGE CORPORATION

Copyright 1946 with all rights reserved F. W. DODGE CORPORATION • Vice-President in charge of Magazine Division, H. Judd Payne • **EDITORS:** Editor-in-Chief, Kenneth Kingsley Stowell, A.I.A.; Managing Editor, Emerson Gable; Senior Associate Editor, Douglas Haskell; Associate Editors, John W. Ragsdale James S. Graham, Jr.; Associate in South America, Edmund J. Whiting, A.I.A.; News Editor, Florence A. van Wyck • **ART DEPARTMENT:** Myron S. Hall, 3rd; Peter Piening, Consultant • **CONSULTANTS:** Industry Relations Consultant, Thomas S. Holden; Statistical Consultant, Clyde Shute; Building Economics Consultant, Norbert Brown; Field Research Consultant, Clifford Dunnells, Jr.

Architectural Record (combined with American Architect and Architecture) is published monthly by F. W. Dodge Corporation, 10 Ferry St., Concord, N. H., with Editorial and Executive Offices at 119 West 40th Street, New York, N. Y. Thomas S. Holden, Pres.; Howard J. Barringer, Vice-Pres. and Treas.; Irving W. Hadsell, Vice-Pres.; Chauncey L. Williams, Vice-Pres.; Sanford D. Stockton, Jr. Secy.; Walter F. De Saix, Asst. Treas.; Edwin H. Freed, Asst. Treas. Member Audit Bureau of Circulation and Associated Business Papers, Inc. Architectural Record is indexed in Reader's Guide, Art Index and Industrial Arts Index. Subscription rates: United States and Possessions, Canada, Cuba, Mexico, Central and South America, $3 the year, $5 for two years, $6 for three years; elsewhere, $5 the year; single copy, $1. Circulation Manager: Marshall Ginn. Every effort will be made to return material submitted for possible publication (if accompanied by stamped, addressed envelope), but the editors and the corporation will not be responsible for loss or damage. Other Dodge Services: Real Estate Record & Builders' Guide, Sweet's Files, Home Owners' Catalogs, Dodge Reports & Dodge Statistical Research Service.

ADJUSTABLE to the actual water needs of the fixture

. . . . means extra savings for Watrous Flush Valve Owners

Watrous Flush Valve (piston type) being adjusted. Simply unscrew cap nut and turn adjusting screw to regulate length of flush to actual needs of fixture. No need to take the valve apart, or even shut off the water.

One of the big reasons why flush valves are so widely used is that they save water.

While this is generally true, the full savings possible with flush valves are never realized unless attention is given to one simple fact.

You get maximum savings only through the use of flush valves that can be adjusted to the actual water needs of the fixtures on which they are installed.

Fixtures vary in their water requirements and frequently as much as one gallon per flush can be saved by individual adjustment.

In a building with 200 flush valves, this saving would be 1,168,000 gallons per year—and that's real savings in dollars and cents. Figure your savings in the table below.

With Watrous Flush Valves you get maximum water savings on every fixture because every Watrous Flush Valve, in both diaphragm and piston types, has the Water-Saver Adjustment.

This simple screw-driver adjustment, taking only a few seconds, is one of the reasons why the selection of Watrous Flush Valves is a source of constant satisfaction over the years to everyone concerned.

THE IMPERIAL BRASS MFG. CO. 1240 W. Harrison St., Chicago 7, Illinois

Estimated Annual Savings of Water Obtainable Through Proper Regulation of Flush Valve to Actual Water Needs of the Fixture.

	Building with 100 Flush Valves	Building with 500 Flush Valves	Project with 1000 Flush Valves
When average of ½ gal. saved per flush	292,000 gallons	1,460,000 gallons	2,920,000 gallons
When average of 1 gal. saved per flush	584,000 gallons	2,920,000 gallons	5,840,000 gallons

For complete information on Watrous Flush Valves, see Sweets Catalog or write for Catalog No. 448-A. Also ask for Bulletin No. 447 giving a summary of "Architects Views on Flush Valve Applications."

THEY PAY FOR THEMSELVES IN THE WATER THEY SAVE

Watrous Flush Valves

THE RECORD REPORTS

Building Decontrol Demands Are Being Met • Prices and Strikes Are Watched • Building Supplies Gain Guaranteed Contracts Are Let • Lumber Steps Taken

The new Congress is expected to go along with the building industry, rather than the federal housing agencies, and pull steadily away from government regulation.

Building decontrol steps taken by the Administration, following industry pressure and the Republican sweep in the elections, will be extended, where legislative action is necessary.

Election results generally are interpreted as a call to change government tactics and to let the laws of supply and demand and competition operate in the national economy.

Many observers feel that the 1947 building year will see construction freed of practically all reconversion rulings from Washington.

Even as the Administration went into a huddle on decontrols, building industry leaders were voicing a concerted demand for such action. At the National Housing Conference held by the American Legion in Washington, D. C., during election week, they called bluntly for an end to government regulation on prices and materials, particularly because of its disruptive effects on distribution.

Under fire were not only price and material hobbles but also subsidy payments and guaranteed markets. Sentiment remains in numerous quarters for retention of rent control on existing housing but not on new housing. (See "Political Housing — A Route to Inflation," by Thomas S. Holden; ARCHITECTURAL RECORD, Oct. 1946, pp. 90–93.)

"By eliminating restrictive price ceilings and the unfortunate subsidy program, we can be assured of an ample supply of materials for the 1947 construction program, and we can be assured that there will be no net increase in actual materials costs," said Douglas Whitlock, chairman of the Building Products Institute.

"Let free enterprise produce at its utmost capacity without hindrance by government directives, allocations, regulations or subsidies. That is the only way to get large scale, balanced production of housing components," comments George W. West, of the U. S. Chamber of Commerce.

"Lift all controls on materials, construction, sales prices and rents on new housing. No further subsidy payments should be made to any segment of the home building industry." These are among the points made by Herbert U. Nelson, of the National Association of Real Estate Boards.

"We are convinced that the time has come for the federal government to relinquish all restrictive controls in the construction field. The primary source of the trouble is to be found in the disorganized condition of the industry, a condition that has not been brought about by the industry itself, but that results from interference with the normal operations of supply and demand," said Louis Justement of the American Institute of Architects.

The National Association of Home Builders, the National Lumber Manufacturers Association, the National Retail Lumber Dealers Association and others joined in pressing for the discontinuance of controls.

Government Sees Headaches

From the viewpoint of government, Washington's housing men see plenty of rough going for building in 1947 despite "progress" to date in the veterans' emergency program. While some current headaches will ease up as materials production improves still more, officials expect new complications to arise. Then, aside from their own difficulties, they are not sure of what Congress will do or how general economic shifts will affect construction.

As to Congress the administration has two main concerns: (1) enactment of the general housing bill which died last session; (2) continuation of present building controls. Scarcely had the 79th Congress ended its second session than Housing Expediter Wilson W. Wyatt announced that he would press for passage of the general housing bill in 1947. On building controls it will be remembered that, in extending OPA, Congress directed that the President by next April report on housing and other commodities which may need continued price ceilings.

Watch Prices, Strikes

As to the general economy, officials particularly are watching two main influences — prices and strikes. The National Housing Agency states it pointedly: "It goes without saying that the program would suffer seriously and the realization of its objectives would be defeated by any major price increases or by extensive work stoppages."

Cited among new complications for the 1947 program is a growing shortage of land and utilities. NHA expects large-scale small-house building operations to be increasingly important and points out that such projects require large parcels of land. In general, it estimates that builders' land inventories will be used up and that "high asking prices for developed lots" will lead them to city outskirts and raw land.

Developments on raw land will require more utilities materials, officials explain, and city departments and private utility companies have begun to feel the pinch of short supply. Too, some communities may run into financing

(*Continued on page 10*)

"Oh, we build the plant around the process here, you know . . ."
— Drawn for the RECORD *by Alan Dunn*

The Greatest Forward Step in Carrier History

★

660,000 sq. ft. more to build Carrier Air Conditioning and Refrigeration

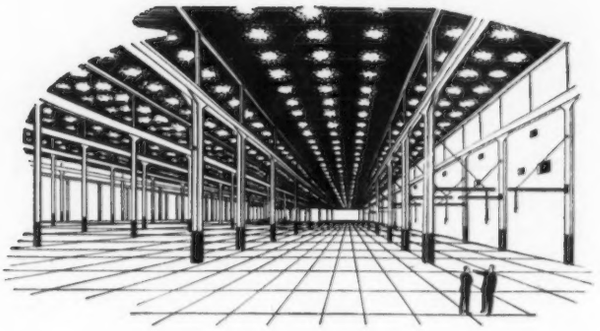

Today, more than ever before, Carrier leads in air conditioning and refrigeration. For the acquisition of a huge, new 660,000-sq.-ft. plant in East Syracuse gives Carrier Corporation facilities that are among the largest, most modern in the world for the manufacture of air conditioning and refrigeration equipment!

This additional plant—part of Carrier's great expansion program—is necessary to meet the ever-mounting demand for Carrier products. Together with the large plant in Syracuse, it will in a matter of months produce the greatest volume of air conditioning and refrigeration in Carrier history.

Here, in these vast new facilities, is impressive evidence of Carrier's position in the air-conditioning field . . . a dramatic re-statement of the Carrier leadership which began with the creation of air conditioning 44 years ago.

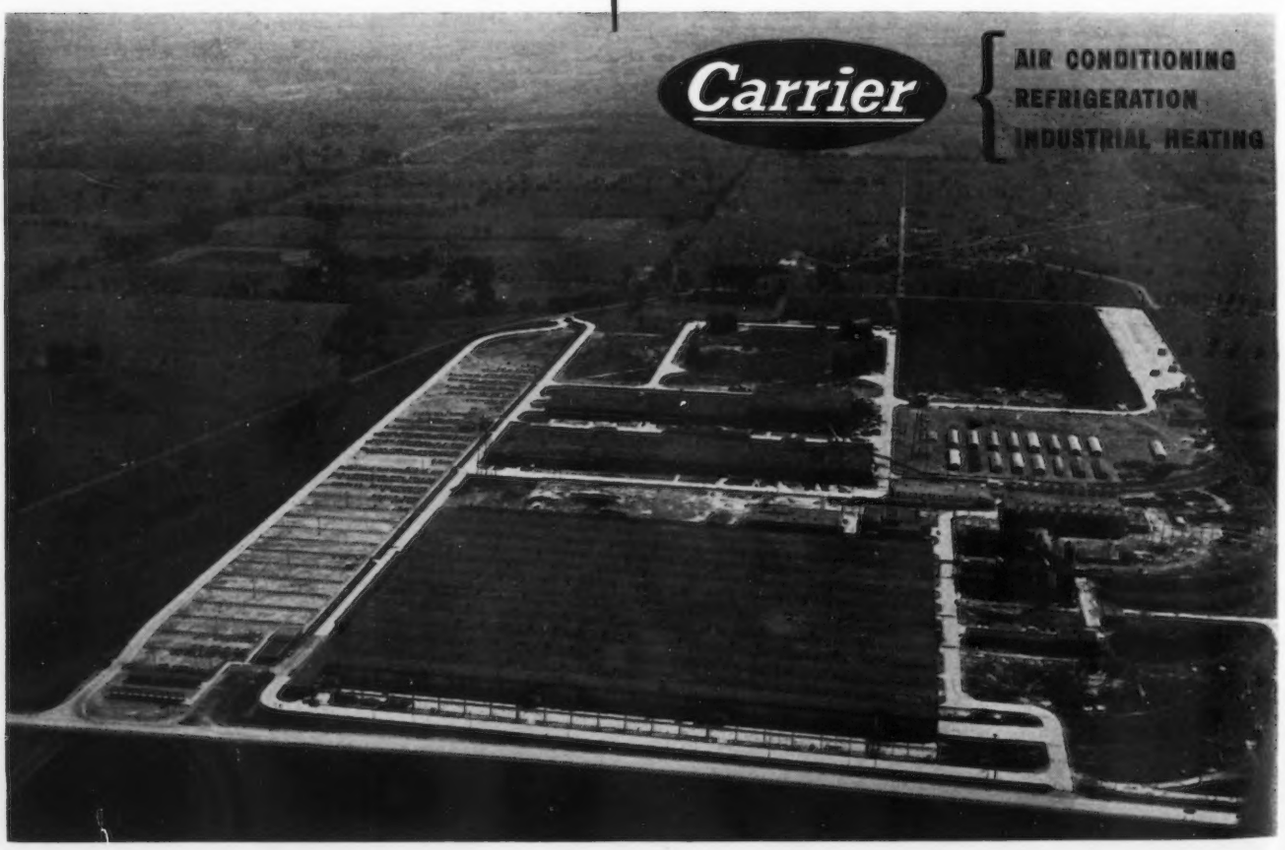

STEEL FRAMING IS SIMPLIFIED, EFFICIENT AND ECONOMICAL

BUILD WITH

STRAN STEEL

● **SIMPLICITY**—With versatile Stran-Steel, only a few basic types of framing members are required. Assembly on the site is fast and easy, because all materials are pre-cut to precision lengths. Erection tools are simple, too; ordinary carpenter's equipment does the job.

● **EFFICIENCY**—Stran-Steel framing can be assembled quickly with sheet metal screws or by welding. Collateral materials are *nailed* securely *to the frame itself* by means of the *nailing groove*, a patented feature of all Stran-Steel joists and studs. Architects have full latitude in working out widely varied exteriors in brick, lumber, stone and other materials.

● **ECONOMY**—In apartments, terraces and other multiple housing projects where framing members are duplicated frequently, Stran-Steel usually costs no more than other framing materials. In single homes, stores or other individual light-load buildings, the initial cost of Stran-Steel may be slightly higher, but the extra investment is repaid many times over in low upkeep and longer building life. For details, see Sweet's File, Architectural, Sweet's File for Builders, or the January issue of Building Supply News.

GREAT LAKES STEEL CORPORATION
Stran-Steel Division • Penobscot Building • Detroit 26, Mich.
UNIT OF NATIONAL STEEL CORPORATION

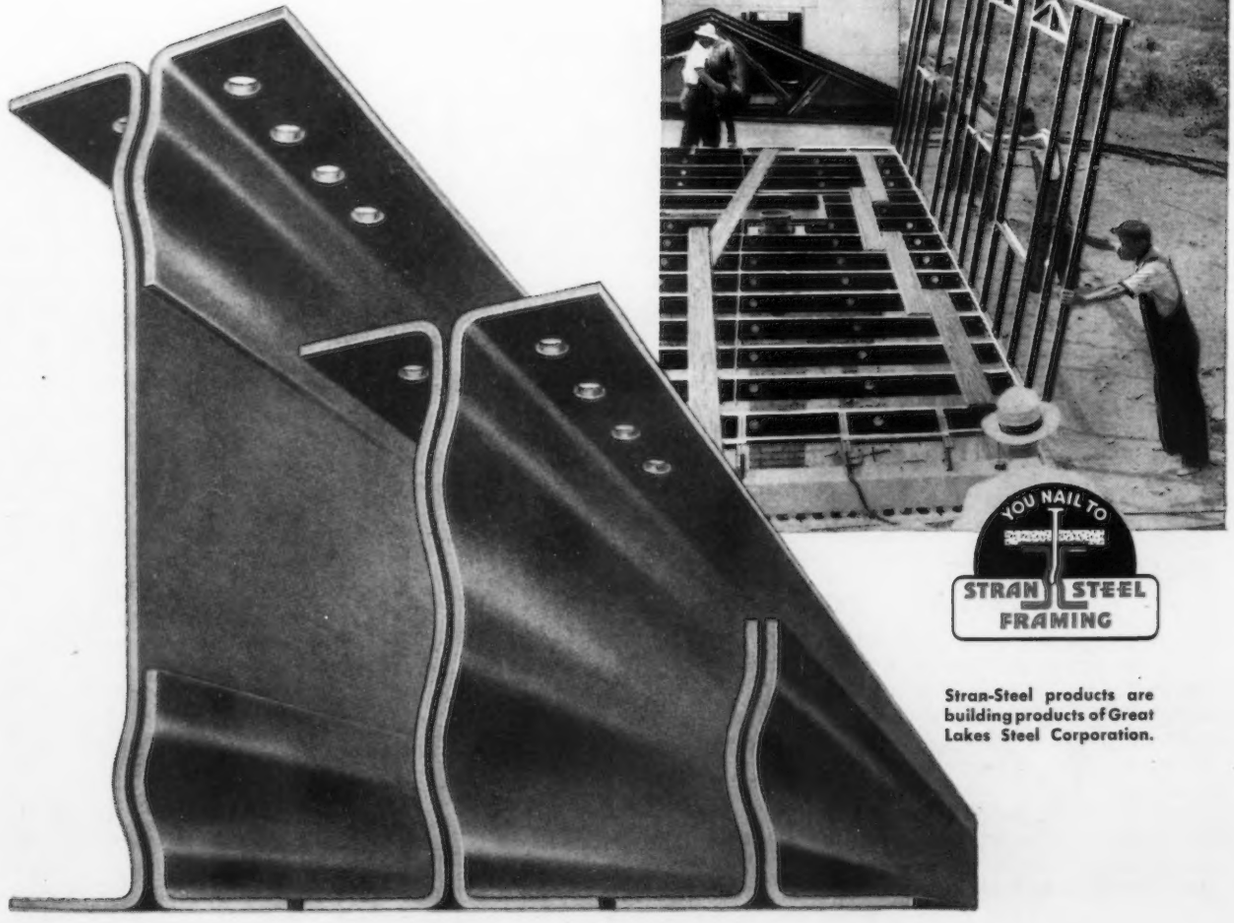

Stran-Steel products are building products of Great Lakes Steel Corporation.

and other delays in providing public facilities and services to new developments.

Building Supplies Gain

As the final 1946 quarter moved along, a still spotted but improving picture on building materials was noted with NHA citing "impressive increases." Both NHA and CPA continued their efforts to channel more and more materials directly into veterans' housing. They added six more items to the priority list, bringing to 66 the materials covered. Added items are electrical service entrance equipment, furnace pipes and fittings, copper tubing and fittings, copper sheet, galvanized steel sheet, and building papers and sheathing papers.

CPA restricted the $15,000 "small job allowance" on industrial building to structures of 10,000 sq. ft. or more; it extended controls over swimming pools, boardwalks, roller coasters, drive-in theaters, parking lots and tennis courts. More lumber, millwork, hardwood flooring and construction plywood were made available on HH ratings.

While all this was going on there was much concern over the growing black market on nails. In a related series of actions, NHA Chief Wyatt approved a premium payment plan on nails and nail rod, leading nail manufacturers took steps to boost production goals to the record high of 77,000 tons a month by December, and nails were put on the critical list for HH ratings.

Further continuing his stimulus to building materials production, Wyatt issued the tenth premium payment regulation — for sand lime brick. Plants whose output is affected by winter weather will be allowed special adjustments on quotas.

Guaranteed Contracts

The Housing Expediter also began putting guaranteed market contracts into play. Nearly 30,000 factory-built homes are called for under the first two such contracts. One with the Homeola Corporation of Chicago calls for 19,400 plywood structures, and the other with the William H. Harman Corporation of Philadelphia is to cover 10,000 steel houses. A third contract was entered into with American Fabricators of Louisville for 7500 plywood houses. Homeola expects to step up production to 100 houses a day while the Harman group plans to start with 50 houses in December and to increase output to a peak of 1000 by next May. RFC will purchase at 90 per cent of the factory price any house that the producers cannot sell.

Negotiations were placed under way with Andrew J. Higgins of New Orleans regarding a "package" of panel units for the walls, partitions and ceiling of a house but not including the roof, floor, doors and trim, cabinets, plumbing, heating and electrical work. The panels include two steel sheets faced with a mat-surface vitrified enamel with a core of expanded concrete.

In connection with the emphasis on prefabrication, the Prefabricated Home Manufacturers' Institute advises of progress in the South in modernizing building codes to provide workable regulations for the construction of prefabricated homes.

Official hopes for the prefabricated home program were hit heavily in November by the RFC refusal to grant initial requests for credit in this field. The cases, involving an estimated 100,000 houses, were considered bellwethers with potentially wide indirect effects.

Lumber Steps Taken

With the lack of lumber sending shivers up the governmental hierarchy clear to the White House, President Truman temporarily waived duties on imported timber, lumber and lumber products. Included among the products are flooring, plywood, red cedar shingles and packing boxes. Reason for the move, say those in the know, is that competitive bidding on world markets could swing potential imports away from this country.

Coincident with this, lumber imports passed prewar highs, coming in at the rate of 1.4 billion board feet a year or twice the average prewar figure. Inflow of some scarce building materials also increased, including plywood, wood shingles, plaster rock and gypsum and building brick. Official word is that Finland and Sweden may ship us wooden prefabricated houses.

Another official note on lumber is an estimate that 1946 production may reach 33 billion board feet, or 5 billion above last year. As to 1947, Expediter Wyatt anticipates that the total will be swelled by 1.6 billion board feet due to the 2700-mile access road program.

Surplus Sales Slanted

The federal government's surplus property sales during the fall were slanted heavily to the veterans' housing program. In fact, the War Assets Administration promised that "virtually all" war surplus building materials and equipment would be made available for veterans' housing by the start of winter. Its streamlined sales plan was expected to get rid of all such surplus goods before Christmas, possibly by December 1.

In another field, WAA moved to boost the output of pig iron for housing. It leased the blast furnace at Gadsden, Ala., for production under the NHA premium payment program. NHA announced further that three other blast furnaces would produce for housing under premium payments. A CPA order provides for allocations of pig iron for bathtubs, sinks and lavatories, cast iron soil and pressure pipe, builders' hardware, etc.

(*Continued on page 13*)

American prefabs attracted Paris crowds

AMERICAN HOUSING SHOWN IN PARIS

In five weeks in the early part of last summer an exposition of American housing and planning techniques at the Grand Palais in Paris drew nearly a quarter of a million visitors.

Covering almost five acres, and including samples of more than 200 different American building materials and pieces of household equipment, the exposition also contained much technical data, photographs of hundreds of houses and housing projects, a dozen films on construction methods, and a complete library of American housing information, including all representative periodicals and books. Four pre-fabricated houses, each completely furnished in typical American style, were special attractions. A complete set of Sweet's Files was prominently displayed in the information section, proved so popular that replacements were called for before the exhibit moved on to Brussels, Prague and other cities.

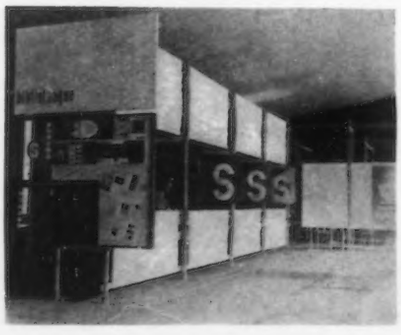

Sweet's Files were well-thumbed by all

TOPS FOR ANY HOUSE!

Reynolds Lifetime Aluminum Shingles being applied on a fine home in Kentucky. Note the attractive shadow line, the ease of application and simplicity of design . . . for a lifetime roof.

REYNOLDS *Lifetime* ALUMINUM SHINGLES

THE ROOFS of Reynolds Lifetime Aluminum Shingles, now going on many a fine home, will be as much admired in 1997 as today. They will be just as weathertight, too — and forever fire-proof. Because aluminum is rust-proof, these shingles need no painting. Those who want color can apply it once —and then let the roof "weather" gracefully, without thought of damage. Maintenance becomes an obsolete factor.

And, besides, this roof is *radiant heat reflective*. The air space between shingle and sheathing is faced by an aluminum surface, even if the outside is painted. That aluminum will reflect up to 95% of inside winter heat — will let through as little as 5% of outside summer heat. So you insulate when you roof with Reynolds Lifetime Aluminum Shingles.

These same basic advantages are inherent in all Reynolds Lifetime Aluminum Building Products. They're designed to play an important part in today's building—now and in the future. Ask your regular supply source for more information—distribution is through established trade channels.

For illustrated literature, please address:

REYNOLDS METALS COMPANY
INCORPORATED
Building Products Division Louisville 1, Ky.

REYNOLDS LIFETIME ALUMINUM

SHINGLES



Completely interlocking, covering nails. Coverage, 8" x 14½". Shadow line, ¼".

CLAPBOARD SIDING

Individual clapboards fit together, covering all nails. 8" exposed surface, 12' lengths.

"SNAP-SEAL" ROOFING



Sheets interlock, all nails covered, weathertight. 6, 8, 10 and 12 feet, 24" coverage.

WEATHERBOARD SIDING

Sheet crimped in simulation of 4" clapboard. 8, 10 and 12 feet, 24" coverage.

CORRUGATED ROOFING AND SIDING

Extra thick (.027")—therefore sturdier, yet lighter. 6, 8, 10, 12 feet, 26" wide.

5-V CRIMP ROOFING AND SIDING

Same extra thickness means sturdier sheet yet lighter. 6, 8, 10, 12 feet, 24" coverage.

Also Aluminum Studs, Trusses, Window Frames, Garage Doors, complete Houses.

NATIONAL MAGAZINE SURVEYS PROVE WOMEN WANT

Electric Ranges

WOMAN'S HOME COMPANION survey shows that more women plan to buy an Electric Range than *any other* type!

McCALL'S MAGAZINE readers made the Electric Range their 2-to-1 "must have" choice in a recent contest.

SUCCESSFUL FARMING survey shows that nearly twice as many REA customers intended to soon buy an Electric Range as then had one.

HOUSEHOLD MAGAZINE survey indicates that 3 times as many women want Electric Ranges as "now have" them.

COUNTRY GENTLEMAN survey shows that among the upper two-thirds of white farmers, the Electric Range is the 2-to-1 choice!

Magazines can't guess about the preferences of their readers. They've got to KNOW—and they find out by making surveys.

These magazines found both on the farm and in the city an overwhelming preference for ELECTRIC RANGES. The convenience, cleanliness, dependability and economy of electric cooking are getting across to women everywhere.

Your houses can take advantage of this trend at little cost. Just build in the wiring for Electric Ranges. It's one of the most sales-worthy features you can install!

Electric Range Section
NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
155 E. 44th Street, New York 17, N. Y.

A-B STOVES • ADMIRAL • CROSLEY • ELECTROMASTER • ESTATE HEATROLA • FRIGIDAIRE • GENERAL ELECTRIC • GIBSON
HOTPOINT • KELVINATOR • LEDO • MONARCH • NORGE • QUALITY • UNIVERSAL • WESTINGHOUSE

TO KEEP THEM MODERN

wire your houses

FOR ELECTRIC RANGES

THE RANGE SERVICE OUTLET

A SYMBOL OF THE MODERN POST-WAR HOME

THE RECORD REPORTS (*Continued from page 10*)

Labor Still Short

Labor shortages continue to be a problem in construction. These are expected to show up even more as materials bottlenecks are broken. The United States Employment Service reports major labor markets encountering shortages in skilled building crafts, especially carpentry and bricklaying.

"In tight areas, hope for relief during the seasonal down-swing of construction activity," says NHA, "was somewhat tempered by the realization that any considerable movement of workers would be restricted by the housing shortage itself. The customary mobility of construction workers, however, coupled with declining job opportunities in northern areas, will undoubtedly furnish some additional workers for labor-short areas in the South and Southwest."

The Labor Department reported that a million and a quarter construction employees were added to the work force in the 12 months following the war's end, bringing August 1946 employment to 2,321,000.

From Many Sources

With construction playing an increasing role in the national economy, numerous federal agencies contribute to the overall mosaic on construction. Here are items from widely ramified sources:

The Home Loan Bank System expects home financing credit by member associations to approach the record volume of $7 billion for the 1946–47 period — $4 billion for houses under VEHP.

Public Health Service advises that preliminary surveys under the new Hospital Construction Act are progressing in many states. Twenty had completed their surveys in October and 20 more were doing so. A Division of Hospital Facilities has been set up in the Public Health Service to help carry out the program.

This special division represents a sizable expansion of the former Hospital Facilities Section and is divided into four units, known as the Office of Program Planning, the Office of Program Operation, the Office of Technical Services and the Office of Hospital Administrative Standards. Under the Office of Technical Services come standards and plans covering the architectural phases of construction, including design, blueprints, etc., from the states. Much preliminary work is to be done through the district offices, which must approve construction applications before they go to Washington, D. C. Marshall Shaffer is heading the Technical Services unit.

Department of Justice was expected to appeal the Federal Circuit Court decision in Chicago which threw out the Federal Trade Commission's order against basing point prices for cement.

NHA in an analysis of HH authorizations for the January 15–March 29 period advises that eight out of ten were single-family detached houses. One-story houses were most popular, representing about 70 per cent. About 40 per cent of the dwellings were five-room and another 40 per cent were divided between four- and six-room structures.

Commerce Department's Office of Technical Services has a 154-page report on two successful solar heat collectors developed under a WPB-sponsored wartime research which bring "effective use of the sun's heat for residential heating closer to realization."

(*Continued on page 14*)

CHARLES S. KEEFE

Word has been received of the death during the summer of Charles Schoonmaker Keefe, widely known house architect and an authority on Colonial American homes. Death came on July 19, the result of injuries sustained in a fall the evening before at Manchester, Vt., where he was supervising work on a client's house.

Specializing in residential design, and particularly in the small house field, Mr. Keefe was author of *The American House* and editor of the revised edition of *The Georgian Period*. His designs, for which he twice was awarded the bronze medal of the Better Homes in America organization founded by J. Lyman Wilbur, have been widely published in architectural and home-making magazines. His non-residential work included the American Legion Memorial Building and the Knights of Columbus Building in Kingston, N. Y., and the Crane Museum at Dalton, Mass., and the Wheatsworth Museum, Hanover, N. J., both restorations.

A member of the A.I.A., Mr. Keefe was president of the Mid-Hudson Valley Architectural Society.

CARLETON M. WINSLOW

Carleton Monroe Winslow, F.A.I.A., for many years a prominent member of the Southern California Chapter, A.I.A., died on October 16 following a long illness.

Formerly associated with Cram, Goodhue and Ferguson, Mr. Winslow was well known as a church architect. Among the churches he designed are the Community Presbyterian of Beverly Hills, the First Baptist of Pasadena, and Mary Star of the Sea in La Jolla, Calif.

The trend on *Electric* water heaters is . . .

UPWARD

NEMA survey discloses huge pent-up demand

There's no let-up in the desire for Electric Water Heaters.

Sales almost tripled in the 6 pre-war years—and a survey made by NEMA in 1944 disclosed three times as many women wanting Electric Water Heaters as now have them, because:

SAFE—Flameless, fumeless.

CLEAN—Smokeless, sootless.

ADAPTABLE—Permit short hot water lines—Require no flue or vent.

TROUBLE-FREE as electric light!

ECONOMICAL—The cost is low for plenty of hot water all the time.

Installing Electric Water Heaters in every house you build, means giving women what they want!

Electric Water Heater Section
NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION
ADMIRAL • B & F • CLARK • ELECTROMASTER • FOWLER • FRIGIDAIRE • GENERAL ELECTRIC • HOTPOINT • HOTSTREAM • SEIDELHUBER • KELVINATOR • MONARCH • NORGE • PEMCO • REX • RHEEM • SELECTRIC • SMITHWAY • THERMO-GRAY • THERMO-WATT • UNIVERSAL • WESTINGHOUSE

A House Wired For An Electric Range Is Already Wired For an

Electric WATER HEATER!

Slippery stair treads cause many serious falling accidents, and management pays the bills when workers are injured or when accidents interfere with production. Guard your workers against slipping and falling and increase your operating efficiency by installing AW Super-Diamond Floor Plates throughout your plant. The exclusive Super-Diamond Pattern provides maximum skid resistance and gives men's feet a firm steady grip.

The engineered design has no corners to collect dirt. Water drains and dries quickly and it is easy to clean with hose, brush or mop. The readily matched pattern makes overnight installations practical, with minimum cutting waste. Join the throng of architects, builders, product engineers and the purchasing agents who insist on AW Super-Diamond Floor Plates for safety and economy.

Free—A 16 page booklet L-33 giving helpful information on weight per square foot, and maximum sizes. Alan Wood Steel Company, Conshohocken, Penna.

AW SUPER-DIAMOND

FLOOR PLATES THAT GRIP

A Product of **ALAN WOOD STEEL COMPANY**

Other Products: Billets • Plates • Sheets • Carbon & Alloy

THE RECORD REPORTS

(*Continued from page 13*)

NEW GROUPS FORMED

Research Institute

A new fact-finding and economic research organization, the Building Products Institute, has been formed by representatives of 200 companies and associations engaged in the manufacture of building materials and equipment. Douglas Whitlock, formerly chairman of the Advisory Board of the Producers' Council, has been elected chairman of the group, and offices have been set up at 1756 K St., N. W., Washington 6, D. C.

"The purpose of the Institute," Mr. Whitlock explains, "is to assemble, analyze and disseminate facts about the production of building materials and equipment and about the progress of construction, including housing. The Institute also will analyze and make recommendations with respect to proposed legislation affecting the construction industry."

Miles L. Colean, former assistant administrator of the FHA, will serve as economic consultant to the Institute.

International Standards

Howard Coonley, chairman of the American Standards Association has been elected president of the new International Organization for Standardization, the formation of which has just been completed by delegates from 25 nations meeting in London.

Gustave L. Gerard, staff president of the Belgian Standards Association, will be vice president to the new organization, expected to be known informally as the I.S.O. Headquarters will be set up shortly in Geneva.

Formation of the I.S.O. consolidates into a single organization the work of the old International Federation of National Standardizing Associations and that of the war-born United Nations Standards Coordinating Committee. The International Electrotechnical Commission is expected to affiliate with I.S.O. shortly as its electrical division.

The governing body of the new group will be a council of representatives from 11 countries. Five of these seats are assigned for a period of five years to China, France, Great Britain, the United States and Russia. Also represented initially on the council are Australia, Belgium, Brazil, India, Norway and Switzerland.

CHICAGO GETS SUBURB

A whole new town, providing homes for some 25,000 middle-income families, will be constructed on a 2300-acre site 25 miles south of Chicago, according to

(*Continued on page 16*)

THIS BOOKLET

GIVES ARCHITECTS UP-TO-DATE INFORMATION ON THE LATEST DEVELOPMENTS IN *Radiant Heating*

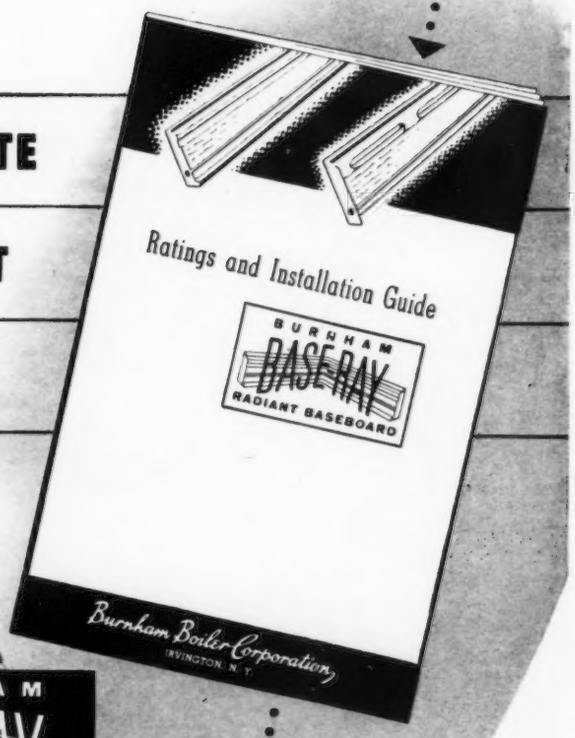

BASE-RAY is only 7" high and 1¾" thick

BURNHAM BASE-RAY RADIANT BASEBOARD

Radiant baseboard heating has been developed to a point of efficiency and utility that makes it a "must" for the truly modern home. BASE-RAY* *radiant* heating offers the architect a fresh and stimulating approach to the problem of up-to-the-minute home heating and BASE-RAY *radiant* baseboard units literally "clear the decks" for room designs that provide the utmost in charm and comfort. From the practical standpoint BASE-RAY units are so simple to install and so low in cost that you'll recognize in them an important contribution to home planning. National advertising of BASE-RAY is creating tremendous enthusiasm among householders and prospective home builders. Why not get all the facts . . . put yourself in a position to benefit from this public approval? Mail the coupon NOW . . . you will profit by the information contained in our booklet.

*Reg. U. S. Pat. Off.



CONCEALED VALVES

This neat metal enclosure, shaped like the heating unit itself, is attached to each end of BASE-RAY, thus completely concealing all valves and fittings.

MOLDINGS



To provide an even more realistic baseboard appearance and to compensate for irregularities sometimes found in walls and floors, regular wood moldings are added at top and bottom of "Standard" BASE-RAY and at top only of "Hy-Power" units.

Burnham Boiler Corporation

IRVINGTON, N. Y., Dept. AR126

Export Department

50 CHURCH ST., NEW YORK 7, N. Y.

Burnham RADIANT HEATING SINCE 1873

Burnham Boiler Corporation Dept. AR126
Irvington, New York
Please send me copy of "Ratings and Installation Guide on BASE-RAY Radiant Baseboards".

Name.....

Address.....

City.....State.....

Delivering *Protection* to the job

IT'S WOLMANIZED LUMBER*

This roof deck is going to last longer . . . they're using Wolmanized Lumber, the lumber impregnated with Wolman Salts* preservative—highly resistant to decay and termite attack.

It is recommended for use in structures exposed to:

(1) Moisture in artificially humidified buildings
(2) Steam and vapor from industrial processes
(3) Condensed water vapor in walls, floors and ceilings of refrigerated buildings
(4) Soil moisture and rain water held in joints, etc., of outdoor structures
(5) Moisture condensed by concrete or masonry

When you buy Wolmanized Lumber, you get *pressure-treated* lumber—the only reliable kind.

*Registered trademarks

1679 McCORMICK BUILDING, CHICAGO 4, ILLINOIS

THE RECORD REPORTS

(*Continued from page 14*)

plans announced by the American Community Builders, Inc., a private enterprise group headed by Philip M. Klutznick, formerly commissioner of the Federal Public Housing Authority.

Field work is now under way, and construction will start as soon as the weather permits. Present plans call for houses selling from $7000 to $10,000, with provision for 600 rental units. The initial program will accommodate 5500 families, probably will provide 2800 single-family units, 650 twin houses for 1300 families, 200 "town and country" homes for 800 families and apartment buildings for 600 families.

The town will be divided into five contiguous residential neighborhoods. It will feature a central park and also contain a major shopping center, supplementary shopping centers, and a nonnuisance industrial area. Sites have been reserved for churches of various denominations, one high school, and five elementary schools around which the five neighborhoods will be centered. There will also be a town hall, bowling alleys, theaters, playgrounds, a swimming pool and picnic spots in the nearby State Forest Preserve.

The basic plan for the community was designed by Elbert Peets of Washington, D. C., in collaboration with Loebl and Schlossman of Chicago, staff architects for the project. The housing firm of Harrison, Ballard & Allen of New York has been retained to head the construction division.

RENTAL HOUSING INCENTIVE OFFERED

The National Housing Agency has issued a leaflet giving a full explanation of the Bureau of Internal Revenue's recent ruling permitting an increased rate of depreciation in the early years in computing income taxes on rental housing properties.

Considered an important additional incentive for developers to build rental housing, the new ruling reduces the rental operator's tax liability in the first ten to twelve years and increases the amount of cash derived from operations. Furthermore, the risk of the mortgagee is reduced during the critical years of the mortgage.

Specifically, the ruling permits the use of the declining-balance method of charging depreciation on rental housing properties, at a rate not exceeding 150 per cent of the straight-line rate applicable to such properties. If, for example, the straight-line rate is 2.5 per cent, the declining-balance rate would be 3.75 per cent.

(*Continued on page 18*)

BRIXMENT MORTAR

Helps Prevent Efflorescence

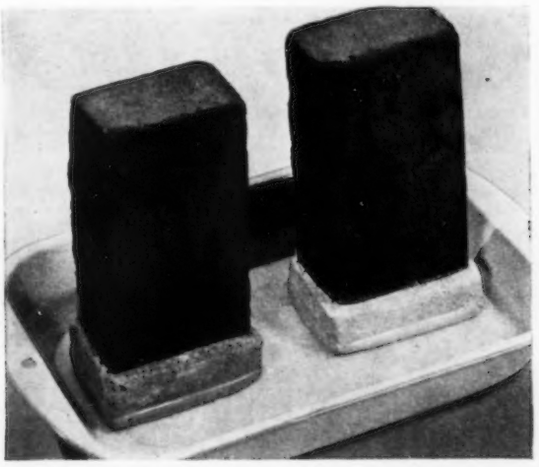

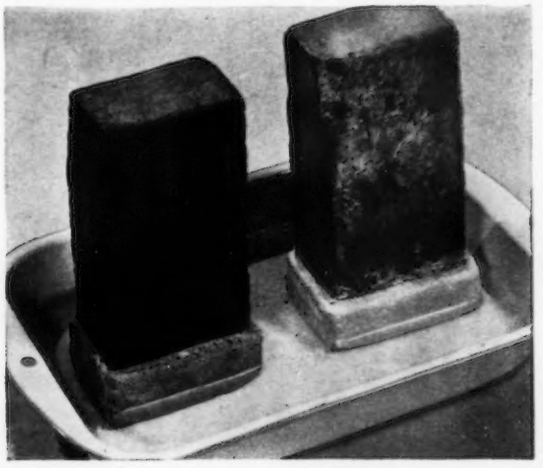

To test two mortars for resistance to efflorescence, "cap" two brick heavily with the mortars — let harden, and keep both brick for a few weeks in a shallow pan of water, as shown. Try this with Brixment mortar!

HERE'S WHAT CAUSES EFFLORESCENCE—AND WHY BRIXMENT MORTAR HELPS CONTROL IT

Efflorescence is an outcropping of minute white crystals on brickwork. When these crystals occur on colored mortar joints, the condition is sometimes mistaken for *fading.*

Efflorescence is caused by the presence of soluble salts in masonry materials. When reached by water, these salts dissolve, and are drawn by evaporation to the surface of the wall.

Brixment itself *does not cause efflorescence* because it is practically free from soluble salts. Even when such salts are present in the sand or brick, the waterproofing in Brixment usually *prevents them from coming to the surface.*

Bricklayers who have used Brixment mortar for years say they have far less efflorescence with Brixment than with any other mortar.

LOUISVILLE CEMENT CO., Incorporated, LOUISVILLE 2, KENTUCKY

CEMENT MANUFACTURERS SINCE 1830

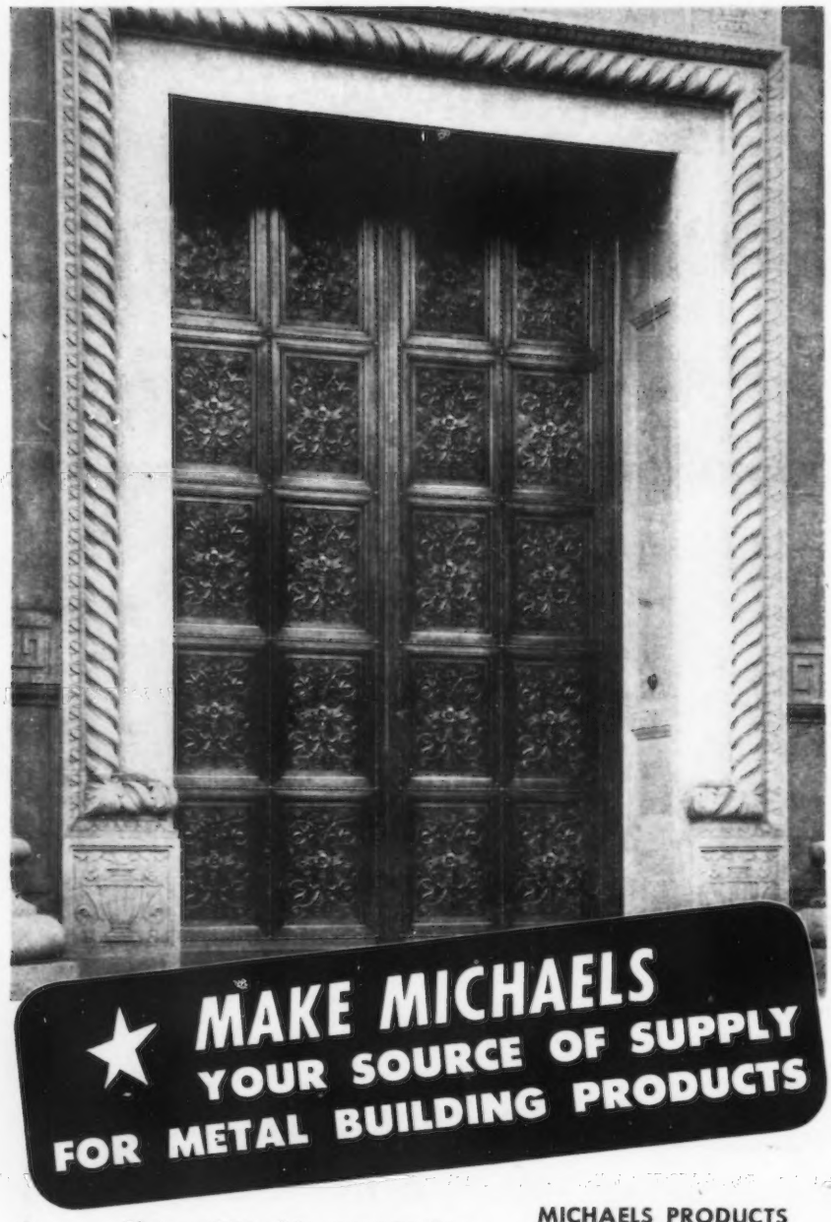

Since 1870 this organization has manufactured bronze, aluminum and nonferrous metal products to meet virtually every building requirement. During this time a large part of our work has been the faithful reproduction, in metal, of architects' creations and plans. Today we are in an even better position to handle this class of business. So, whether it be new construction or a remodeling job, don't overlook the products and service offered by Michaels. Write for more details. The bronze door illustrated above is only one of many Michaels products. A partial list is given in the next column.

MICHAELS PRODUCTS

Fixtures for Banks and Offices
Welded Bronze Doors
Elevator Doors
Elevator Enclosures
Check Desks (standing and wall)
Lamp Standards
Marquise
Tablets and Signs
Name Plates
Astragals (adjustable)
Railings (cast and wrought)
Building Directories
Bulletin Boards
Stamped and Cast Radiator Grilles
Grilles and Wickets
Kick and Push Plates
Push Bars
Wrought Iron and Bronze Lighting Fixtures
Wire Work
Cast Thresholds
Extruded Thresholds
Extruded Casements and Store Front Sash
Bronze and Iron Store Fronts
Bronze Double Hung Windows
Bronze Casement Windows

THE MICHAELS ART BRONZE CO., Inc., Covington, Kentucky

Manufacturers since 1870 of many products in Bronze, Aluminum and other metals

THE RECORD REPORTS

(*Continued from page 16*)

ON THE CALENDAR

December 2–7: 17th National Exposition of Power and Mechanical Engineering, Grand Central Palace, New York.

January 4, 1947: Meeting, North American Conference on Church Architecture, New York. For details address Director, Interdenominational Bureau of Architecture, 297 Fourth Ave., New York 10, N. Y.

January 9–11: Annual meeting, Louisiana Engineering Society, New Orleans.

January 14–17: First national Materials Handling Exposition, Public Auditorium, Cleveland, Ohio.

January 23–26: 2nd Conference and Exhibit, Low-Pressure Division, The Society of the Plastics Industry, Edgewater Beach Hotel, Chicago.

January 25–31: 3rd annual plastics show and convention, Society of Plastics Engineers, Navy Pier, Chicago. Technical meeting, Congress Hotel, Chicago. January 27–31 only.

January 27–30: 28th Annual Convention, The Associated General Contractors of America, Inc., Stevens Hotel, Chicago.

January 27–31: 7th International Heating and Ventilating Exposition, Lakeside Hall, Cleveland, Ohio.

January 27–31: Electrical Engineering Exposition, and Winter Convention, American Institute of Electrical Engineers, 71st Regiment Armory, New York City.

May 5–11: 2nd National Plastics Exposition and Annual Convention, The Society of the Plastics Industry, Coliseum, Chicago.

June 12–22: 2nd annual Construction Industries Exposition and Home Show, Pan-Pacific Auditorium, Los Angeles.

AT THE COLLEGES

Appointments

Six new instructors and professors have been added to the growing faculty of the School of Architecture, Syracuse University: George F. Earle, instructor of drawing, water color and industrial design; George Clayton, in charge of intermediate design, intermediate construction, and drawing; Milo D. Folley, in charge of design and drawing laboratory classes; Robert H. Snyder, instructor of elementary design and construction laboratory courses; Charles E. Croom, instructor in theory of structure; and Harley J. McKee, in charge of classes in history of architecture.

Nine resident critics in design have been added to the teaching staff of the School of Architecture, Columbia University: Don Hatch, architect; Percival

(*Continued on page 20*)

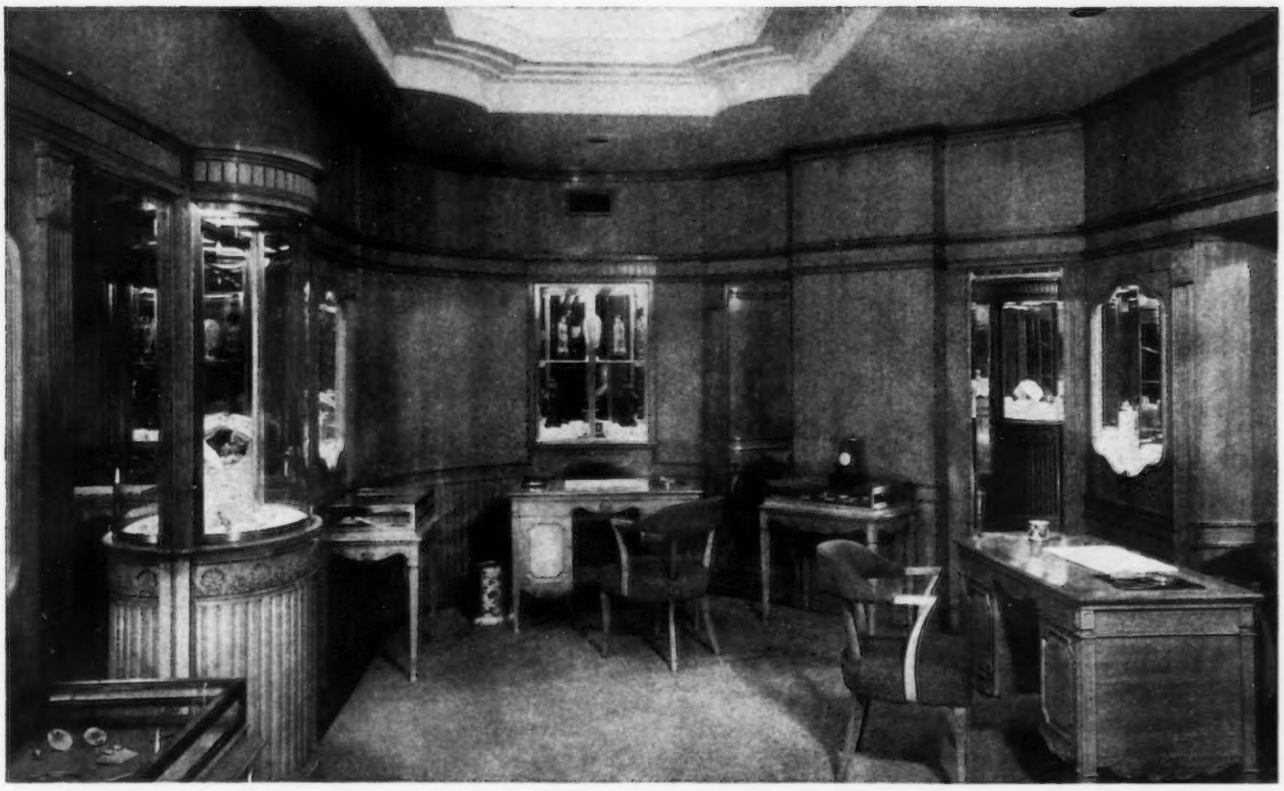

Jewelry Shop, Blum's Vogue, Chicago • Architects: Maher and McGrew, Evanston, one of the noted wood interiors produced at Woodwork Corporation

artistry in wood

Giving substance to the beautiful wood interiors that architects and decorators envision has been the function of Woodwork Corporation craftsmen for a good many years. A mentality that quickly grasps the architect's idea plus consummate skill with wood that renders the idea faithfully in the form of beautiful paneling, or perhaps in cabinets and cases which accentuate the quality of the merchandise they display, is characteristic of the Woodwork Corporation craftsman. Architects, decorators and clients appreciate this artistry in wood. That is why the high proficiency of Woodwork Corporation's skilled, experienced artisans is salient in the decor of many distinguished hotels, dining rooms, clubs, churches, smart coutouries, and retail establishments serving a discerning clientele.

RESIDENTIAL • COMMERCIAL • INDUSTRIAL

WOODWORK CORPORATION of AMERICA

1432 WEST TWENTY FIRST STREET • CHICAGO 8, ILLINOIS

A-2

In fairness to our clients, present and future, we must remind you that Woodwork Corporation of America's services are temporarily hampered by serious shortages of materials. Contracts, therefore, can be assumed only on a basis of indefinite delivery until conditions improve.

Just as a Jeweler selects a fine setting...

Veterans' Hospital, Bay Pines, St. Petersburg, Florida

CONCRETE CRAFTSMEN CHOOSE WHITE CEMENT

Colorful jewels sparkle and shine with full beauty in the proper setting. So, too, a matrix of Atlas White Cement sets off the color values of pigments and aggregates in Terrazzo, Stucco, Cement Paint and Architectural Concrete Slabs. Such a "setting" has the uniform clarity to complement the desired color overtones, whether in contrast or blend.

In addition, Atlas White, a true portland cement, provides protection against moisture and the wear of weather. Simple cleansing suffices. Maintenance costs stay low.

For further information write the Atlas White Bureau, Universal Atlas Cement Company (United States Steel Corporation Subsidiary), Chrysler Building, New York 17, N. Y.

AR-C-15

FOR BEAUTY AND UTILITY

ATLAS WHITE CEMENT

FOR TERRAZZO, PAINT, SLABS, STUCCO

"THE THEATRE GUILD ON THE AIR"—*Sponsored by U. S. Steel Sunday Evenings—ABC Network*

THE RECORD REPORTS

(*Continued from page 18*)

Goodman, winner of the Paris Prize in 1925; James Marshall Miller, who will direct the school's Planning and Housing Division; Charles Rieger, graduate French architect; Albert O. Halse, in charge of drawing and design techniques; Harvey Clarkson, LeBrun Traveling Fellow of 1938; Antonin Heythum, industrial and stage designer; John C. B. Moore, of the New York firm of Moore and Hutchins; and Wallace Sanders, of Sanders and Malsen. Theodore Rohdenberg has been appointed instructor in construction.

Professor Aubrey I. Brown has been appointed head of the Ohio State University department of mechanical engineering.

F. Ellis Johnson, former dean of the College of Engineering at both University of Missouri and the University of Wisconsin, has been appointed director of educational activities at the Hanford Engineer Works, Richland, Wash.

Walter A. Taylor, formerly associate professor of architecture at Syracuse University, has been appointed director of the new Department of Education and Research of the American Institute of Architects.

Harold D. Hauf, director of the Technical Branch of the NHA, has been recalled by Yale University to become acting chairman of the Department of Agriculture.

Pratt Faculty

Under the chairmanship of recently appointed Olindo Grossi, the Department of Architecture of Pratt Institute is now staffed by a new group of critics: Walter B. Sanders, C.I.A.M.; Philip C. Johnson, co-author of *The International Style*, and director of the Department of Architecture at the Museum of Modern Art, New York; Caleb Hornbostel, co-winner of the Wheaton College Competition and a member of the staff at Cooper Union, New York; St. Elmo Piza, formerly of the staff of New York University; William N. Breger, graduate in architecture, Harvard University. Mr. Lloyd Morgan will serve as visiting critic for the next senior problem.

Also on the new Pratt staff are Henry and William Eipel of Tuck & Eipel, Engineers, serving as consultant engineering critics on design problems, and Konrad F. Wittmann, instructor in town planning.

New Courses

At the School of Architecture, Columbia University, a new course has been inaugurated which is devoted to a study of management-tenant relations and the

(*Continued on page 136*)

Unit-Built...

RCA MASTER SOUND CONTROL CONSOLES

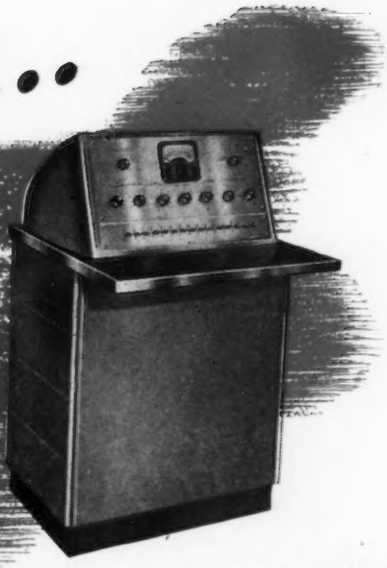

Master Sound Control Console provides paging facilities to loudspeakers in 15 to 60 zones.

Master Sound Control Console with Record Transcription Unit and facilities for the distribution of speech and music to loudspeakers in 120 zones.

Master Sound Control Console with two Record Transcription Units, a Radio Receiver and paging facilities for distribution to 120 zones.

Whether your problem is sound distribution for a small paging installation or an elaborate plant broadcasting service— you can do it better with an RCA unit-built Master Sound Control Console.

A series of standardized frames and panels are matched to make up distinctly styled basic units. These matched units are so designed that it is possible to assemble them into any desired combination of unit-built Master Sound Control Consoles to fit the job.

No matter what your requirements—record transcription turntable, recorder, radio, or paging—so flexible is this equipment that the right combination of basic units can be provided to give you any or all of these services. As your sound-system needs develop, basic units can be added without discarding equipment already in use.

Built of "matched" units, RCA's Master Sound Control Equipment provides custom-built consoles within the price range of regular production-made equipment. You are assured of dependable performance at lower cost, for years to come.

For full information on the various *unit-built* combinations, write: Dept. 10-L, Sound Equipment Section, RCA, Camden, N. J.

SOUND SYSTEMS

RADIO CORPORATION of AMERICA

ENGINEERING PRODUCTS DEPARTMENT, CAMDEN, N.J.

In Canada: RCA VICTOR Company Limited, Montreal

POSTCRIPT ON ROTTERDAM

As reported by Earle Draper in the October ARCHITECTURAL RECORD, the Netherlands city of Rotterdam wasted no time in drawing up plans for its rebuilding following the disastrous German air raid of 1940. Neither did it waste any time in putting those plans to work. Within a few weeks after the bombing, the municipality not only had acquired the entire central area of the city, which had been completely destroyed, but had expropriated neighboring areas and small villages as well.

The reasons for this bold annexation were explained by C. van Traa, city engineer, to a delegation of the British Townplanning Institute during its visit to Rotterdam in September.

"From the beginning," Mr. van Traa said, "it was clear that it would not be possible to reconstruct in the city all the buildings which we lost there.

"Why not? In the first place it was evident that the open spaces in the new city should be much wider than they were before the war as the open spaces inside the blocks were far below the minimum socially speaking.

"In the second place we wished more parks laid out in the town.

"In the third place it was necessary to reserve more space for the expected development of the traffic, especially for the main roads and for parking purposes.

"In the fourth place we had to consider from a social point of view to enlarge the sites for the offices and the dwellings which had to be rebuilt.

"All these considerations made it necessary to look for sites around the town to rebuild there that part of the inner town for which provisions could be made in these new surroundings.

"It is also evident that the factories which belong in a special district should leave the city. The same can be said of a great part of the dwellings which in the city never can have the social conditions they need and which therefore must be projected in special living quarters in the neighborhood of the town.

"To realize these ideas it was inevitable to expropriate certain areas in the neighborhood but belonging to independent municipalities and in order to get the desired influence on the development in the surrounding areas of the town we proceeded to the annexation of the smaller villages next to the town."

Rotterdam today: Top of page, temporary arcade with emergency shops, in front of General Post Office. Above, left, bridges over a new canal connecting the river Rotte with the Maas; badly damaged Groote Kerk in background. Above, right, the first new office building in the harbor quarter. At right, ventilation building of the 1070-meter tunnel under the Maas, completed during the war; main passenger entrance at extreme right of photo

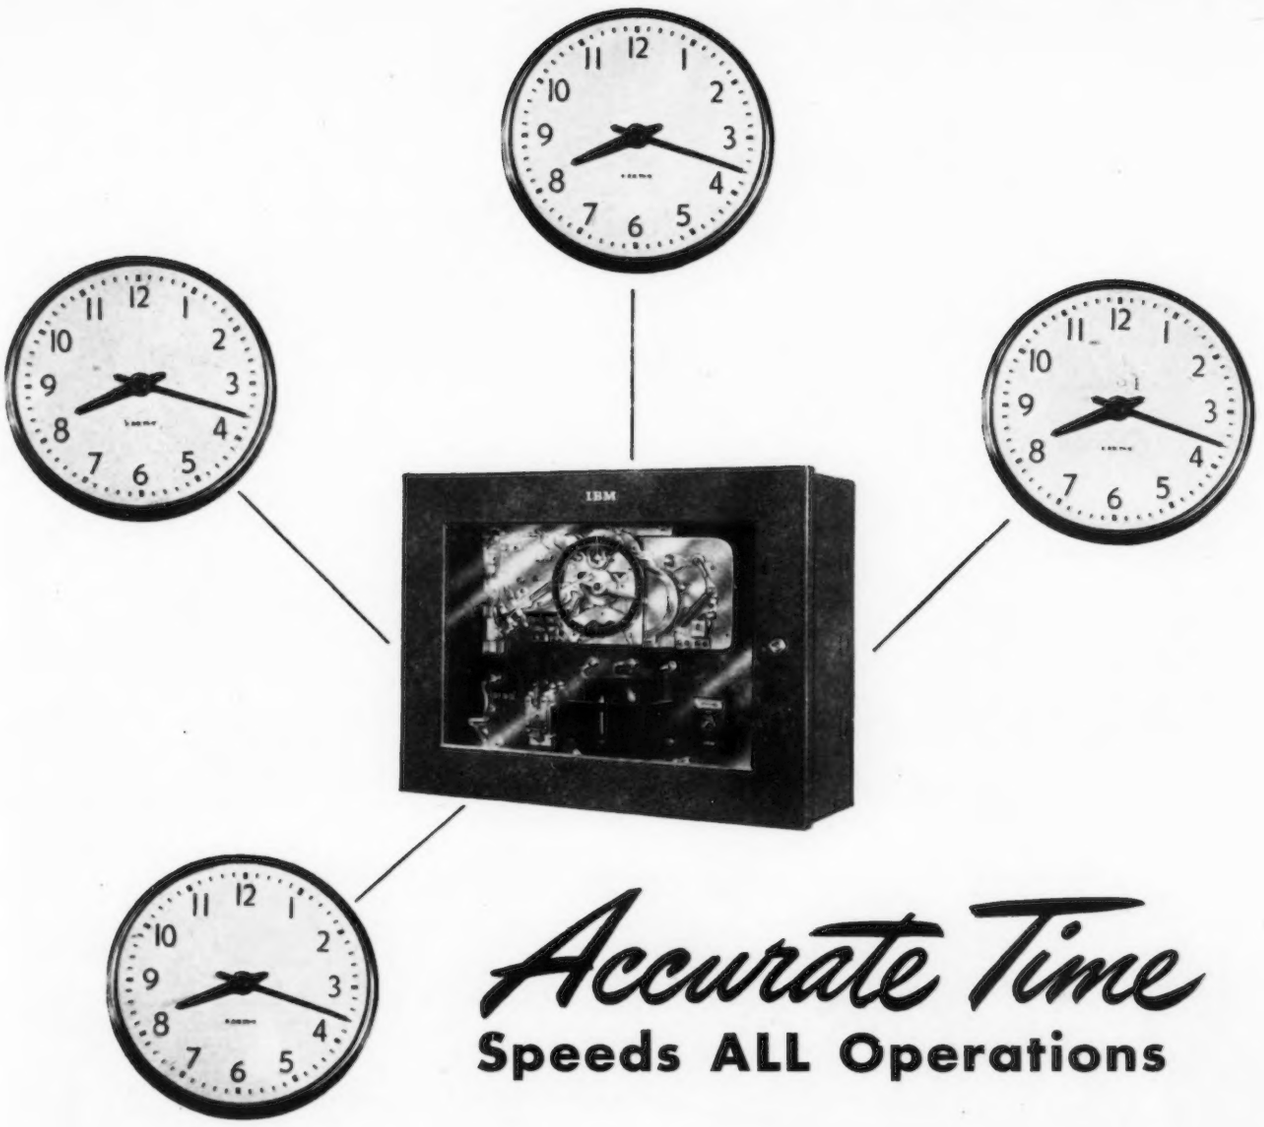

Accurate Time
Speeds ALL Operations

With the installation of an IBM Time Control and Time Indicating System, all operations can be keyed to the same accurate time.

Secondary clocks and connected time recording devices of all types are automatically self-regulated every hour by this IBM Master Time Control unit.

The latest model of this unit even provides reserve operating power for use in the event of power interruptions. The unit also automatically regulates the rate of the clock to agree with the frequency rate of the electrical supply used.

As an integral part of an IBM Time Control and Time Indicating System, this new unit automatically provides constant, accurate time year in and year out.

IBM

ELECTRIC TIME SYSTEMS AND TIME RECORDERS
ELECTRIC PUNCHED CARD ACCOUNTING MACHINES
AND SERVICE BUREAU FACILITIES
ELECTRIC TYPEWRITERS • PROOF MACHINES

International Business Machines Corporation, World Headquarters Building, 590 Madison Avenue, New York 22, N. Y.

"No Maintenance Required with an ADLAKE ALUMINUM WINDOW!"

THAT'S RIGHT—other than ordinary washing and cleaning, there's *no maintenance required* with an Adlake Aluminum Window!

Because Adlake is built to last—*and last!* An exclusive combination of nonmetallic weather stripping and serrated guides gives finger-tip control, eliminates excessive air infiltration, allows no warping or sticking, cuts maintenance problems to the bone! What's more, Adlake is beautifully designed for lasting architectural appeal.

Before specifying or detailing *any* window, why not get full information about Adlake Windows? We believe you'll find it well worth while.

THE ADAMS & WESTLAKE COMPANY

Furnishers of Windows to the Transportation Industry for Over 30 Years

ESTABLISHED 1857 ELKHART, INDIANA NEW YORK • CHICAGO

Solve your Reinforcing Problems

with the Proven Wire Fabric

Meeting varied and increasing demands for concrete reinforcement, prominent architects, engineers and contractors have come to rely upon U·S·S American Welded Wire Fabric. High strength steel wires of uniform quality, closely and accurately spaced, are prefabricated by electrical welding into a continuous mat which has proved the most effective and economical reinforcement for many types of concrete construction.

AMERICAN STEEL & WIRE COMPANY
USS
AMERICAN WELDED WIRE FABRIC
UNITED STATES STEEL

American Steel & Wire Company
Cleveland, Chicago and New York
Columbia Steel Company, San Francisco
Pacific Coast Distributors
Tennessee Coal, Iron & Railroad Company, Birmingham
Southern Distributors
United States Steel Export Company, New York

UNITED STATES STEEL

CONSTRUCTION COST INDEXES — Labor and Materials

United States average 1926 — 1929 = 100

Compiled by Clyde Shute, manager, Statistical and Research Division, F. W. Dodge Corporation, from data collected by E. H. Boeckh & Associates, Inc.

NEW YORK

Period	Residential		Apts., Hotels, Office Bldgs.	Commercial and Factory Buildings	
	Brick	Frame	Brick and Concr.	Brick and Concr.	Brick and Steel
1920	136.1	136.9	123.3	123.6	122.6
1925	121.5	122.8	111.4	113.3	110.3
1930	127.0	126.7	124.1	128.0	123.6
1935	93.8	91.3	104.7	108.5	105.5
1939	123.5	122.4	130.7	133.4	130.1
1940	126.3	125.1	132.2	135.1	131.4
1941	134.5	135.1	135.1	137.2	134.5
1942	139.1	140.7	137.9	139.3	137.1
1943	142.5	144.5	140.2	141.7	139.0
1944	153.1	154.3	149.6	152.6	149.6
1945	160.5	161.7	156.3	158.0	155.4
Jan. 1946	173.1	173.7	169.8	170.4	167.0
Mar. 1946	174.9	175.6	172.1	172.9	169.0
May 1946	180.3	180.6	177.4	179.3	174.7
June 1946	180.7	181.0	177.9	179.7	175.1
July 1946	181.3	181.6	178.6	180.3	175.6
Aug. 1946	185.6	186.0	180.0	181.5	177.3
Sept. 1946	187.1	187.4	181.5	184.5	179.5
	% increase over 1939				
Sept. 1946	**51.5**	**53.1**	**38.8**	**38.3**	**37.9**

ATLANTA

Period	Residential		Apts., Hotels, Office Bldgs.	Commercial and Factory Buildings	
	Brick	Frame	Brick and Concr.	Brick and Concr.	Brick and Steel
1920	122.8	122.9	108.6	109.8	105.7
1925	86.4	85.0	88.6	92.5	83.4
1930	82.1	80.9	84.5	86.1	83.6
1935	72.3	67.9	84.0	87.1	85.1
1939	86.3	83.1	95.1	97.4	94.7
1940	91.0	89.0	96.9	98.5	97.5
1941	97.5	96.1	99.9	101.4	100.8
1942	102.8	102.5	104.4	104.9	105.1
1943	109.2	109.8	108.5	108.1	108.7
1944	123.2	124.5	117.3	117.2	118.2
1945	132.1	133.9	123.2	122.8	123.3
Jan. 1946	137.9	138.4	127.4	127.3	127.0
Mar. 1946	141.2	143.0	133.6	129.3	129.3
May 1946	144.7	147.2	133.2	131.0	131.3
June 1946	144.9	147.4	133.5	131.2	131.5
July 1946	148.6	150.2	138.6	137.0	135.5
Aug. 1946	152.4	153.3	141.2	141.3	137.5
Sept. 1946	154.5	155.4	142.6	144.4	141.8
	% increase over 1939				
Sept. 1946	**79.1**	**86.9**	**49.9**	**48.3**	**49.7**

ST. LOUIS

Period	Residential		Apts., Hotels, Office Bldgs.	Commercial and Factory Buildings	
	Brick	Frame	Brick and Concr.	Brick and Concr.	Brick and Steel
1920	118.1	121.1	112.1	110.7	113.1
1925	118.6	118.4	116.3	118.1	114.4
1930	108.9	108.3	112.4	115.3	111.3
1935	95.1	90.1	104.1	108.3	105.4
1939	110.2	107.0	118.7	119.8	119.0
1940	112.6	110.1	119.3	120.3	119.4
1941	118.8	118.0	121.2	121.7	122.2
1942	124.5	123.3	126.9	128.6	126.9
1943	128.2	126.4	131.2	133.3	130.3
1944	138.4	138.4	135.7	136.7	136.6
1945	152.8	152.3	146.2	148.5	145.6
Jan. 1946	157.7	158.3	150.8	152.6	149.5
Mar. 1946	158.8	159.5	151.1	152.8	149.9
May 1946	162.2	163.0	154.3	155.8	153.1
June 1946	165.8	165.0	159.9	163.8	159.5
July 1946	167.8	167.7	161.9	164.8	160.8
Aug. 1946	172.5	172.7	164.0	166.2	162.9
Sept. 1946	173.7	174.0	164.9	166.7	164.3
	% increase over 1939				
Sept. 1946	**57.6**	**62.6**	**39.0**	**39.2**	**38.0**

SAN FRANCISCO

Period	Residential		Apts., Hotels, Office Bldgs.	Commercial and Factory Buildings	
	Brick	Frame	Brick and Concr.	Brick and Concr.	Brick and Steel
1920	108.8	107.5	115.2	115.1	122.1
1925	91.0	86.5	99.5	102.1	98.0
1930	90.8	86.8	100.4	104.9	100.4
1935	89.5	84.5	96.4	103.7	99.7
1939	105.6	99.3	117.4	121.9	116.5
1940	106.4	101.2	116.3	120.1	115.5
1941	116.3	112.9	120.5	123.4	124.3
1942	123.6	120.1	127.5	129.3	130.8
1943	131.3	127.7	133.2	136.6	136.3
1944	139.4	137.1	139.4	142.0	142.4
1945	146.2	144.3	144.5	146.8	147.9
Jan. 1946	148.6	146.4	146.7	148.3	149.3
Mar. 1946	154.0	153.0	151.8	151.8	152.3
May 1946	157.6	156.1	155.7	156.5	156.2
June 1946	158.0	156.5	156.2	156.9	156.6
July 1946	159.0	157.5	158.7	158.7	160.1
Aug. 1946	163.5	164.0	160.6	159.3	161.5
Sept. 1946	165.8	162.9	164.0	167.0	168.0
	% increase over 1939				
Sept. 1946	**57.1**	**64.1**	**39.6**	**37.0**	**44.2**

The index numbers shown are for combined material and labor costs. The indexes for each separate type of construction relate to the United States average for 1926–29 for that particular type — considered 100.

Cost comparisons, as percentage differences for any particular type of construction, are possible between localities, or periods of time within the same city, by dividing the difference between the two index numbers by one of them; i.e.:

index for city A = 110
index for city B = 95
(both indexes must be for the same type of construction).

Then: costs in A are approximately 16 per cent higher than in B.

$$\frac{110-95}{95} = 0.158$$

Conversely: costs in B are approximately 14 per cent lower than in A.

$$\frac{110-95}{110} = 0.136$$

Cost comparisons cannot be made between different types of construction because the index numbers for each type relate to a different U. S. average for 1926–29.

Material prices and wage rates used in the current indexes make no allowance for payments in excess of published legal prices, thus, indexes reflect minimum costs and not necessarily actual costs.

These index numbers will appear whenever changes are significant.

Accuracy

LINKED closely to the precision jobs coming off the boards are the tools that assure accuracy of detail. One of these is the seemingly small pencil which looms large in the mind of a craftsman, as an important instrument of accuracy.

VENUS Drawing Pencils are engineered to give you drafting perfection without failure: accurately *graded* to assure uniformity in all 17 degrees . . . *strong* in performance . . . *smooth* and *clean* in action.

VENUS *DRAWING PENCILS*

AMERICAN LEAD PENCIL COMPANY, HOBOKEN, NEW JERSEY

REQUIRED READING

INFORMAL LIVING

Sunset Western Ranch Houses. By the Editorial Staff of Sunset Magazine, in collaboration with Cliff May. San Francisco, Calif., Lane Publishing Co., 1946. 7¾ by 10½ in. 160 pp. illus. $3.00.

"Almost any house that provides for an informal type of living and is not definitely marked by unmistakable style symbols is called a *ranch house.*" Such is the premise, stated immediately in the introduction, upon which this collection of widely diverse house plans has been based. Informality, low roof lines, generous provision for outdoor living, are the common denominators of the group.

Following a lively history of the ranch house, the editors plunge into an analysis of the special needs that such a house is planned to fill, and of the advantages that it offers. Over and over again they stress one point: that a house must *live* like a ranch house to be properly called one. The close-to-the-ground look and the wide porch may be hallmarks of the type, but they do not type the house unless it actually is on ground level, opening out conveniently toward patio and garden, and its porch is properly secluded. So all the houses in this book, large and small alike, feature "built in" landscaping. Not formal planting, mind you, but casual, of-the-earth-earthy lawns and gardens, trees and shrubs, patios and courts. One landscaping plan even calls solemnly for weeds and wildflowers!

A curious, not too happy idiosyncrasy of this book is the total lack of architect credit except for an alphabetical list on the very last page. Consulting this, however, one finds such well known architects as Van Evera Bailey, Mario Corbett, Gardner A. Dailey, Michael Goodman, Frederick H. Reimers, and Wurster, Bernardi and Emmons represented in the ranch house hierarchy.

INTERIORS

Interior Decoration for Today and Tomorrow. By Walter Murray. Hollywood 28, Calif., Murray & Gee, Inc., 1946. 8½ by 11 in. 96 pp. illus. $2.50.

"Today's trend in house planning," says Architect Paul R. Williams in the introduction to Mr. Murray's book, "is based on the premise that every inch of space must serve to the utmost, and that every dollar spent must purchase utility as well as beauty. But skillful planning alone is not enough. Every bit as much care must be given to the problem of interior decoration if today's house is to be functional as well as beautiful and still fall within reach of the average budget."

The average budget, however, has an unexpectedly long reach if it encompasses interiors such as presented by Mr. Murray here. Mrs. Average Housewife, in fact, probably would drool with envy at the budgetary implications of many of the photos. Yet she would find a good number of thoroughly practical suggestions, too, which she could adopt without too much financial difficulty.

Like most books on interior decoration, this one has do-and-don't lists, buying guideposts, color schemes, tips on window treatments, furniture, and so on. It offers a number of color schemes for various rooms, some of which are rather more startling than practical (such as one living room scheme with chartreuse rug, black-bordered waxed floors, black woodwork with accents in coral, bisque walls, lipstick red draperies, red-violet and grayed-blue upholstery, and lemon yellow lamps). And it offers the traditional list of decorating principles. It does not, however, concern itself with furniture refinishing, drapery and slip-cover making, and other money-saving home decorating considerations. It is a book, in other words, for those members of the carriage trade whose hearts are young and gay.

POCKET EDITIONS

(1) An Outline of European Architecture, by Nikolaus Pevsner; (2) An Introduction to Modern Architecture, by J. M. Richards; (3) Town Planning, by Thomas Sharp.

It is pleasant indeed to see these three important volumes reduced to the Penguin level of size and price and geared to a wider public. None of them is an abridged edition, even the illustrations being faithfully included.

Of the three, the only one which may not be familiar to American readers is the first, published in England during the war (1943). This is a thorough-going history of European architecture, starting with the 6th Century and running through to the present. Indicative of its sensitive approach to its subject is the author's statement in his introduction that "architecture is not the product of materials and purposes . . . but of the changing spirits of changing ages. It is the spirit of an age that pervades its social life, its religion, its scholarship and its arts. The Gothic style was not created because somebody invented rib-vaulting. The Gothic spirit existed and expressed itself in rib-vaults . . . before the constructional possibilities of the rib had been discovered. The Modern Movement did not come into being because steel frame and reinforced concrete construction had been worked out — they were worked out because a new spirit required them." That is the kernel of Mr. Pevsner's study: not what was built, but why it was built as it was, is his chief concern, his constant emphasis.

PREFABRICATION

Prefabrication in Building. By Richard Sheppard, F.R.I.B.A. London, Eng., The Architectural Press, 1946. 7¼ by 9½ in. 148 pp. illus. 18s. 6d.

The stress laid upon prefabrication by the almost universal housing shortage has produced a number of treatises on mass building, not the least of which is this small book from England.

Architect Sheppard has not written a history of prefabrication, but an analysis of its accomplishments and its potentialities. He discusses the various materials used — steel, wood, concrete — and their individual characteristics. He describes the techniques in common usage in England, the United States, and on the continent of Europe. He points out the site-planning peculiarities, the successes and the failures of prefab "colonies." And he shows how prefabrication is affecting, and is likely to affect, building practice in the industry as a whole.

CITY PLANNING

City and Regional Planning Papers. By Alfred Bettman. Edited by Arthur C. Comey. Cambridge, Mass., Harvard Univ. Press, 1946. 6¾ by 7½ in. 20 + 294 pp. $4.50.

The astonishing thing about this collection of papers by Alfred Bettman is their continuing timeliness. Written from 1917 to 1945, they sound, for the most part, as immediate as the morning newspaper.

A lawyer by profession, Mr. Bettman was for many years a leader in civic planning, addressing group after group of laymen, technicians and officials, and publishing paper after paper on the methods and precepts of planning. Following his death in 1945, his addresses and articles were assembled by Mr. Comey into this volume. Unlike most such collections, it makes good consecutive reading, and is a surprisingly complete coverage of planning problems. Here is a valuable addition to the literature of city planning.

DETROIT

The People of Detroit. Detroit, Mich., City Plan Commission, 1946. 8½ by 11 in. 52 pp. illus.

Following a careful study of the population trends in their own city, the City Planning Commission of Detroit has come up with a handful of general conclusions, among them:

"Almost two-thirds of the nation's people are now living in urban communities in small or large cities or their suburbs.

"A far-reaching consequence of this urban trend has been a declining birth rate which has brought the total national population close to numerical stability.

(Continued on page 30)

Why are some roofs like a

"pig-in-a-poke?"

—because the buyer doesn't always know whether he's getting a quality product or a white elephant

Be certain that the roofing materials you specify will turn out to be a good investment for your clients . . . long-lasting, economical, durable, water- and weather-proof materials. Be certain that your specifications will produce results that will give complete satisfaction. Be certain that roof-failure will not occur because you specified the wrong products.

The way to *be certain* is to specify Koppers Old Style Pitch and Approved Tarred Felt on all your built-up roofing jobs. These materials have made records in past years for their wearing qualities and general satisfaction. The reason coal-tar pitch roofs are still as good today as they were years ago is because no better roofing materials have as yet been discovered. Koppers Company, Inc., Tar and Chemical Division, Pittsburgh 19, Pennsylvania.

KOPPERS *roofing*

KOPPERS *waterproofing*

K KOPPERS

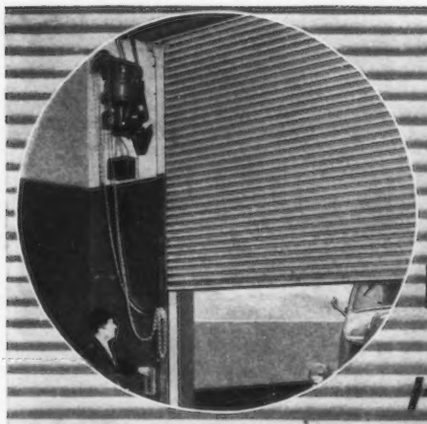

KINNEAR

ROLLING DOORS

feature

I-N-T-E-R-L-O-C-K-I-N-G

STEEL-SLAT CONSTRUCTION

With these Major Advantages

• RESILIENT STRENGTH

• COILING UPWARD ACTION

• GREATER PROTECTION

• SPACE ECONOMY

• LONG SERVICE LIFE

plus

the added convenience of time-and-labor-saving Kinnear Motor Operators and Remote Control if desired



Each Kinnear Rolling Door is individually assembled of standard parts to fit any size door opening, in old or new buildings. In every case, the famous, time-tested, Kinnear interlocking-steel-slat curtain coils smoothly and easily into a compact roll overhead. It clears the door area completely when open; protects against weather, fire, and intrusion when closed. Choose Kinnear Rolling Doors for extra years of efficient, low-cost service. Write for details.

The Kinnear Mfg. Co.

Factories

1860-80 Fields Ave. Columbus 16, Ohio

1742 Yosemite Ave. San Francisco 24, Calif.

Offices and Agents in all Principal Cities

SAVING WAYS IN DOORWAYS KINNEAR ROLLING DOORS

REQUIRED READING

(*Continued from page 28*)

"Increased economic security and better living conditions for people who live in cities are essential to a sound national population policy."

As for Detroit itself, the Commission predicts limitation of total employment in the area to 1,200,000 and total population to 3,000,000. The declining birth rate, it finds, has resulted in an increase in the proportion of older persons in the population, and the cumulative effect of this shifting age distribution is to lower the number of possible births in the future. "The provision of a variety of building types and dwelling sizes within each community," the Commission concludes, "is necessary if families are to be accommodated over a full life cycle in any community, and the population of each community stabilized with a normal cross-section of ages."

Technical Books

DESIGNED FOR WELDING

Manual of Design for Arc Welded Steel Structures. Compiled by LaMotte Grover. New York 17 (60 E. 42nd St.), Air Reduction Sales Co., Dept. MD, 1946. 6 by 9 in. xiv + 282 pp. illus. $2.00.

Liberally illustrated and concisely put together, this manual offers much useful, up-to-date information on the fundamentals of design, materials, inspection, estimating, and engineering control of welding and related operations. Chapters are included on electrode requirements, specifications for welded connections for all sizes of rolled beams, and a series of diagrams for the rapid design of welded connections. The book is based largely upon standards of the American Welding Society, the American Institute of Steel Construction, and on reports of the Welding Research Council of the Engineering Foundation.

"PAINT BIBLE"

Physical and Chemical Examination of Paints, Varnishes, Lacquers and Colors. By Henry A. Gardner and G. G. Sward. 10th ed. Bethesda, Md. (4723 Elm St.), Henry A. Gardner Laboratory, Inc., 1946. 10½ by 11¾ in. 652 pp.

Once again the "Paint Bible" has been completely revised and considerably enlarged. New material in this 10th edition includes charts of colors widely used by the Army and Navy, and a presentation of new, still experimental methods of production and processing. Also included are the latest methods of measuring light reflection and matching colors, Army and Navy recommendations for camouflage, wearability of colors, and hiding power. The size of the volume has been changed for more convenient handling.

ARCHITECTURAL

RECORD

MUCH TO DO ABOUT HOUSING

TAKING the lid off material and labor costs doesn't solve all our housing problems, emergency, veterans or long range. But it is a mighty step in the right direction, and it seems bound to insure increased production of scarce building materials — the No. 1 bottleneck of housing, and of all building. With price and wage ceilings off, house-price ceilings can't remain long in force without creating a work-stoppage, for no builders will undertake new ventures in such a squeeze. So the $10,000 ceiling seems next to go (we jumped the gun in last month's editorial). The same reasoning will bring about a relaxation of rent controls on new dwellings. Mr. Taft is quoted as stating that it may be possible to remove rent controls next February or March, though he feels they should not be lifted at present.

The fact that good dwelling units cannot be built at the $10,000 figure in many sections of the country, and that new dwellings must be priced beyond the reach or desire of most veterans, may well bring about the belated realization of the fact that our economy demands the production of housing for *all* citizens. Certainly veterans should not be saddled with houses built at peak prices, especially as the majority prefer and need rental housing.

It is heartening to learn that Wilson Wyatt is now, at last, turning his major attention to "new devices to provide rental homes and apartments to offset the expected rise in building costs," and that "some new aids to private financing may be asked either as an amendment to the pending housing bill * or as separate legislation." We believe that separate legislation is preferable and can be more effective in a shorter time than amendments tacked on to a debatable and once-shelved bill.

Private financing can hardly be induced to enter the rental-housing-market in any quantity as long as rent controls are unrelated to building and operating costs. The removal of the present stagnating rent ceilings on new construction would seem to be the first "aid" to private financing. The incentive of possible profit is essential to apartment house production.

The progress and prosperity of the whole building industry is dependent on the speed with which steps are taken to view the housing problem realistically and constructively. Estimates of the construction volume for 1947 are based on the present trend. The change from emphasis on restrictions to emphasis on encouragement and production augurs well for the future. Before construction in all needed categories (the hundreds of projects now on the architects' boards) can proceed at full speed there is, therefore, much to do about housing.

* *For a discussion of this bill ,see "Political Housing—A Route to Inflation," by Thomas S. Holden,* ARCHITECTURAL RECORD, *October 1946.*

Kenneth K. Stowell
EDITOR

CONSTRUCTION OUTLOOK FOR 1947

By Thomas S. Holden
President, F. W. Dodge Corporation
and Clyde Shute
Assistant Vice President and Manager, Statistical and Research Division

POTENTIAL construction demand is probably greater than the 1947 capacity of the construction industry. Since the industry's capacity, particularly in the material supply sector, has increased greatly in 1946, the obvious expectation is for a substantial increase in total volume during the coming year.

This expectation could fail of realization if construction costs continue to rise so rapidly as to price vast numbers of planned projects out of the market. It could, presumably, fail of realization if there should be a nation-wide wave of work stoppages in basic industries and among the construction trades. Odds are that neither of these possible deterrents will develop on a sufficiently serious scale to force any substantial or prolonged curtailment of construction volume.

In the present situation the general economic conditions surrounding construction activity and the types of stresses and strains likely to prevail within the industry, are even more important for appraising the outlook for the coming year than are any attempted measures of construction demand.

Price decontrol and restoration of free markets were announced by the President on November 9.

In each important group of commodities there is apt to be a short spell of price confusion, followed by a degree of stabilization. For most commodities in short supply the typical pattern followed after decontrol is a sudden rise in prices above OPA ceilings to levels less than, or sometimes equal to, previous black market prices, followed quickly by stepped-up production, increased supply and a price recession from the peak.

The current general rise in commodity prices is likely to reach a peak and start receding during the first quarter of 1947. Wholesale prices of farm products have already softened. A number of consumer items have been selling below retail price ceilings.

Wholesale prices of foods, textiles and other consumer goods are likely to reach a peak and turn down sooner than construction materials and other durable goods.

The U. S. Bureau of Labor Statistics index of wholesale prices of all commodities stood at 128.4 on August 24, at 134.8 on November 2. There was a minor downswing between those dates. Apparently, the index will be subject to more fluctuations until some degree of stabilization is reached. At the peak it may stand somewhere from 140 to 145. At such a point, the peak would be between 80 and 85 per cent over the average for 1939, which was 77.1. During World War I, the general wholesale price index more than doubled, and reached at the postwar peak in May 1920 a point nearly two and a half times the prewar level.

Since the general price rise this time has been so very much less than it was in the World War I period, the danger of general collapse of prices and serious business recession this time is correspondingly less. The more likely prospect this time is for more orderly price adjustment with only a moderate amount of confusion and a moderate decline of the index.

Threats of strikes in key industries are a disturbing factor as this is being written. Further wage increases would tend to boost prices above present levels; serious work stoppages curtailing production would prolong the unbalance of demand and supply in important commodities. However, neither wage increases as large as those of the past year nor prolonged work stoppages are likely. Labor disturbances in 1947 will probably have less effect on the general price structure and the general business picture than they had in 1946.

The anticipated price recession will probably be accompanied by a mild or only moderately serious recession in general business activity. Total industrial production may be in a moderately declining phase during a part of next year, and there may be a moderate decline in total employment.

In short, postwar readjustment will continue through a considerable part of 1947, relative stabilization of the general price level will probably be achieved, and the stage should be set for full postwar recovery after next

ESTIMATED CONTRACT VOLUME – MILLIONS OF DOLLARS

37 EASTERN STATES	Year 1946*	Estimate Year 1947	% Change
Commercial buildings	800	880	+ 10
Manufacturing buildings	1250	1070	− 14
Educational and science buildings	220	380	+ 73
Hospital and institutional buildings	130	150	+ 15
Public buildings	20	60	+200
Religious buildings	70	100	+ 43
Social and recreational buildings	95	120	+ 26
Miscellaneous nonresidential buildings	80	100	+ 25
TOTAL NONRESIDENTIAL BUILDINGS	2665	2860	+ 7
Apartment buildings, hotels and dormitories	540	1250	+132
One- and two-family houses	2800	3360	+ 20
Other shelter	15	15	—
TOTAL RESIDENTIAL BUILDINGS	3355	4625	+ 38
TOTAL BUILDING	6020	7485	+ 24
Public works and utilities	1725	2100	+ 22
TOTAL CONSTRUCTION	7745	9585	+ 24
			* 9 months actual, 3 months estimated
Estimated dwelling units (37 states, basis of Dodge figures)	*465,000*	*630,000*	*+35*
48-state estimate (Basis of B. of L. S. figures)	*750,000*	*1,012,500*	*+35*

year's principal adjustments have been completed.

Construction activity will not necessarily participate in the expected recession of general business. Odds are that it will not, but will continue on an increasing scale without serious setback. If this turns out to be true, construction may be the principal sustaining activity tending to moderate the impact of price recession on the general business structure. Construction could possibly share this moderating role with the automotive industry, another one with the tremendous backlog of unfilled demand.

Much depends upon relaxation of the numerous controls under which construction operated in 1946. Price controls on construction materials went out on November 9. In spite of the fact that the extraordinary powers granted the Housing Expediter under the Patman Act are not now scheduled to expire until December 31, 1947, it is likely that most controls will be out by March 31 at the latest. Rent control on existing structures may persist beyond that time. With material price and wage controls out, it would appear impossible to maintain ceiling prices on new houses. Priorities favoring housing projects over non-residential construction may be used for a while.

While credit must be given to the early accomplishment of the Housing Expediter in causing incentive prices to be granted by OPA and by this and other means stimulating production of critical materials and equipment items, housing activity has recently been hindered more than helped by administration of controls. Controls have been largely responsible for black markets, black market prices and many abnormal costs.

Removal of material price controls will stimulate increased production of many scarce items. It will probably result in numerous price increases, over present ceilings, but to levels lower than black market prices. Materials in approximately balanced supply will stabilize quickly. The few items that may show marked price increases will not necessarily count heavily in total construction costs. Construction costs will rise somewhat above present theoretical levels indicated by published index numbers, but will be measurably less than present actual costs. Elimination of the numerous abnormal costs engendered by controls will give the industry considerable leeway in adjusting itself to free-market conditions. Controls have been causing the industry, against its will, to price its product out of some of its markets. Elimination of controls will enable the industry to reduce that danger.

Most construction materials will progress from sellers' markets into buyers' markets during the course of next year and material supply will cease to be the major bottleneck. The major bottleneck will be shortage of skilled labor. While apprentice training has been stepped up, and many building trades unions have recruited new members, recruitment has not kept pace with needs in a number of important trades. Elimination of wage controls may bring demands for wage increases. However, top officials of the American Federation of Labor have already publicly stated the view that the cost-of-living rise has nearly reached its peak, and the view that increased labor efficiency is essential for increased production and for justification of the wage increases that have been gained. If this philosophy is accepted widely by local building trades unions, labor disturbances in the building trades should not reach serious proportions. Manpower shortages normally tend to much overtime pay, bonuses, and to low productivity, cost factors which must be measurably overcome if construction activity is to be sustained at expected levels.

If next year's general economic conditions turn out approximately as described above, the prospect would be for considerably greater increases in residential building than in nonresidential building or heavy

engineering construction. This is likely to be true even with controls removed and even with preferential treatment for housing projects eliminated.

Although a number of important industrial corporations have plant expansion programs which have not yet been started, a reduced volume of manufacturing plant construction seems likely in 1947. The recent break in stock-market prices, the anticipated break in commodity prices, the possibility of a recession in general business activity, the prospect for narrow profit margins in the adjustment year and uncertainty as to the labor situation all tend to discourage aggressive expansion programs and to suggest postponement of decisions.

These factors also influence commercial building activity, for which a moderate increase is estimated.

In view of pressing needs for community improvement and the anticipated betterment of the supply situation, moderate increases over 1946 are estimated for the various classes of community, public and institutional buildings and for public works. An estimated marked increase in public utility construction reflects the great pressure of expansion needs in this field.

Odds Favor High Demand

While the prospect of general business recession has prompted talk of federal stimulation of public works, there is serious question as to whether such a course would be necessary or desirable. Odds favor continuation of effective private construction demand on such a scale as to make greatly enlarged public works programs unduly competitive for materials and labor in the 1947 market.

Residential building is estimated to increase 38 per cent in dollar volume over the final 1946 total. This estimate assumes an approximately uncontrolled market during most of 1947. The large estimated increase in apartments and hotels is predicated on the assumption that new construction will be completely exempted from rent ceilings. Rent ceilings have been and continue to be the principal deterrents to apartment building. It has been conclusively shown that increased supply of rental housing is the most urgent need in the whole housing shortage situation as it affects both veterans and nonveterans.

Individual investors planning to build or buy single-family houses are less apt to be deterred by temporarily unfavorable business conditions than are prospective investors in commercial or industrial projects. According to published index numbers, the construction cost of brick and concrete apartment and hotel type buildings was 42 per cent over the 1939 average in September of this year, brick houses were 60 per cent over prewar, and frame houses were 65 per cent over prewar. If such differentials as these persist after deflation of present abnormal cost factors, they will constitute a strong factor favorable to apartment house building.

The figures on dwelling units given in the table of estimates require some explanation.

F. W. Dodge Corporation's record shows for the 37 eastern states an overall total of 353,748 units contracted for during the first nine months of 1946. They include suites in apartment buildings, two-family houses, and in combination buildings, single-family houses (including those built on owners' order for owners' occupancy and those built for sale, or rent) and new suites created by conversion of existing buildings. They do not include demountable structures moved to new locations. These are all actual projects reported and verified by the Dodge field staff, and include no estimates.

The figure for the entire year 1946 (465,000) includes an estimate of units to be so reported and verified during the fourth quarter.

The 1947 figure (630,000) is an advance estimate of actual projects to be reported next year by the Dodge field staff. This indicates a 35 per cent advance in total units over 1946, compared with a 38 per cent estimated increase in dollar volume. It is estimated that unit costs of comparable buildings may average somewhat higher in 1947; also that more higher-quality, higher-priced units will be included in next year's programs (assuming relaxation, or removal, of ceilings and restrictions).

Translated into figures comparable with the 48 state figures regularly published by the U. S. Bureau of Labor Statistics our estimates give the following results: 750,000 units for this year; 1,000,000 units for 1947.

The current figures on dwelling units in the 48 states, published by the U. S. Bureau of Labor Statistics, consist of estimates based upon building permit records. There is no simple way of reconciling these estimates with the factual statistics recorded by Dodge.

Housing Quota Will Not Be Reached

The conservatively estimated 1,000,000 units for 1947 obviously implies that the quota set for next year by the Housing Expediter will not be reached. If the 1946 quota of starts is made, it will have been done at the expense of stretching out completion time of most projects to double, or more than double, that ordinarily required. A sizable portion of next year's material supply will be required for completion of large numbers of residential and nonresidential projects started in 1946. Builders will want to make a better record on completions next year than has been possible in 1946, if they are to expand their operations.

These estimates have assumed that the few remaining controls will be out at an early date; they also assume that more housing will be built without controls than would have been the case if controls had been continued.

With recession in farm prices next year, total farm income is likely to decline; this would probably tend to reduce farm building volume, as compared with 1946. While there is still, in all probability, a very large backlog of needed repair and alteration work, it is likely to decline somewhat in total volume in 1947.

As usual, Dodge advance estimates aim to be conservative, in order to furnish what is believed to be a safe guide for production and sales planning by business organizations in the construction field.

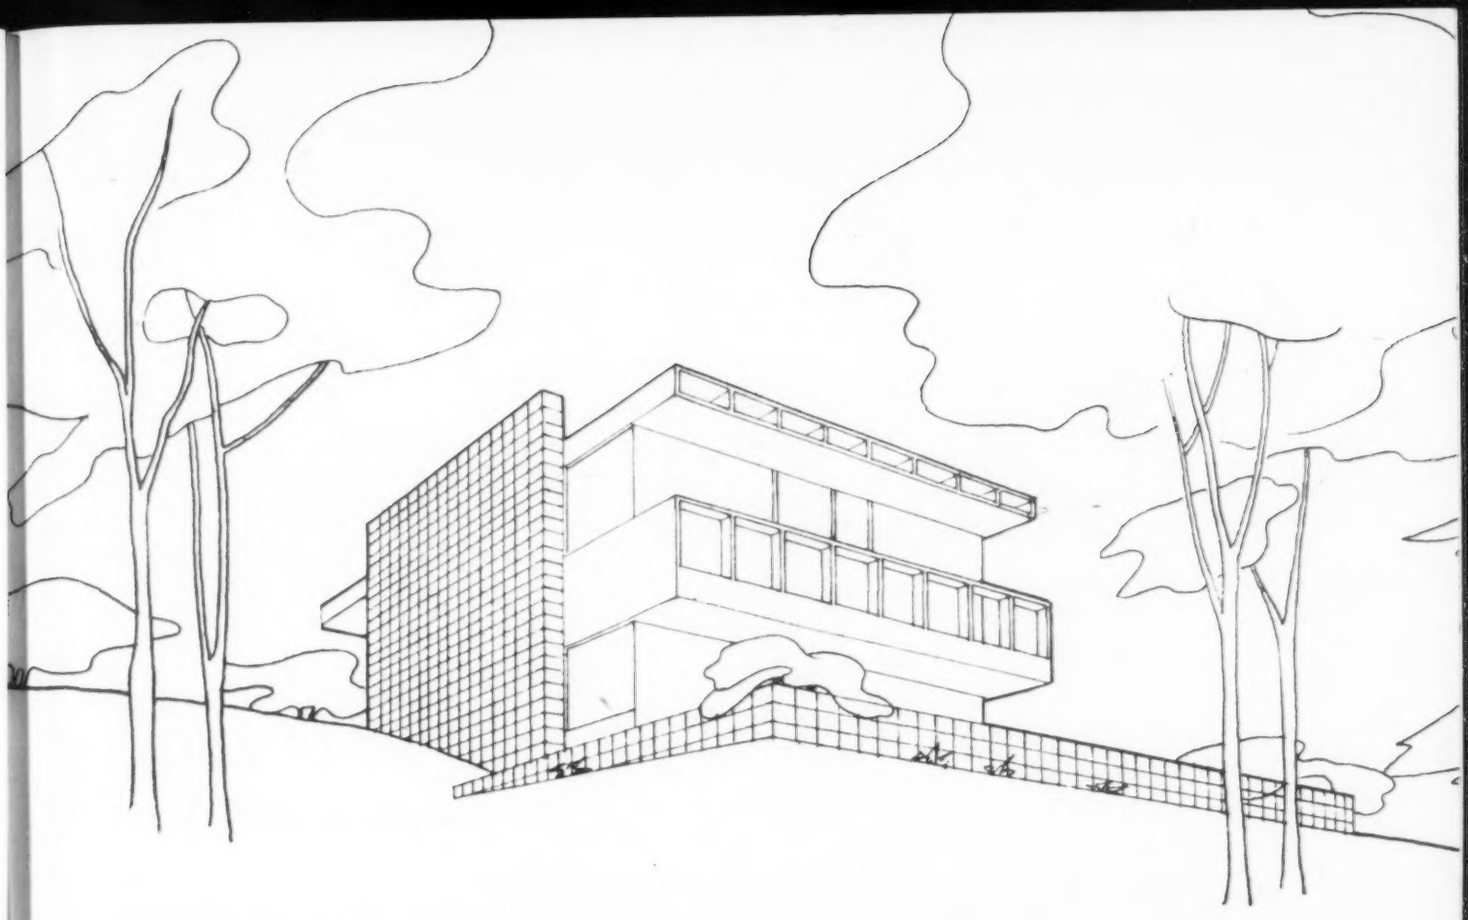

PREVIEWS OF FOUR POSTWAR HOUSES

Schweikher and Elting, Architects

Hedrich-Blessing Photo

Paul Schweikher and Winston Elting

Out of their Navy uniforms but little more than a year, Schweikher and Elting have been working together on fresh solutions to age-old problems, using both new and old materials in ways calculated to meet the need and desires of forward-looking clients. . . . Paul Schweikher, born in Denver, studied art at Chicago's Art Institute and engineering at Armour. He received his architectural degree from Yale in 1929 and was awarded the Matcham Traveling Fellowship. His practice under his own name, with Theodore Lamb, began in 1933. . . . Winston Elting of Lake Forest received his architectural training at Princeton University and L'Ecole des Beaux Arts, Paris. After working in various architectural offices in Chicago, he began his own practice in 1937, and joined Schweikher and Lamb in 1940.

1. OVERLOOKING AN INDIANA LAKE

DESIGNED for a young ex-naval officer and his wife, this compactly-spacious house takes full advantage of the lake view and the natural slope of the site. The economical construction is largely of reinforced concrete block and glass, with a "breathing" flat roof open at two ends. The utility room contains the heater, hot-water tank, well, pump, pressure tank, water-softener, and a long work bench.

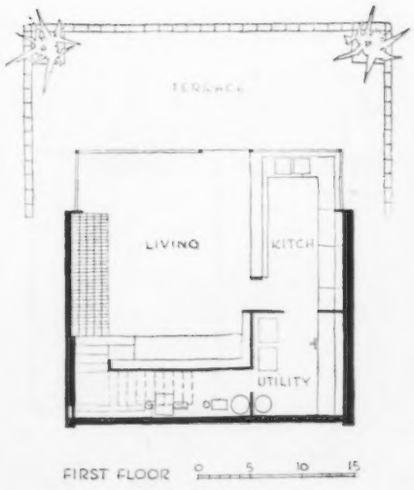

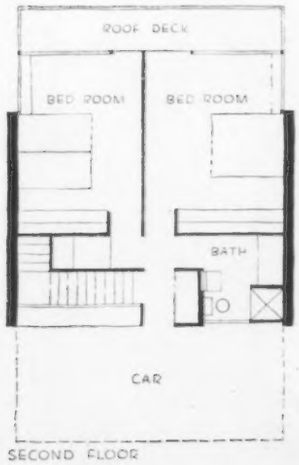

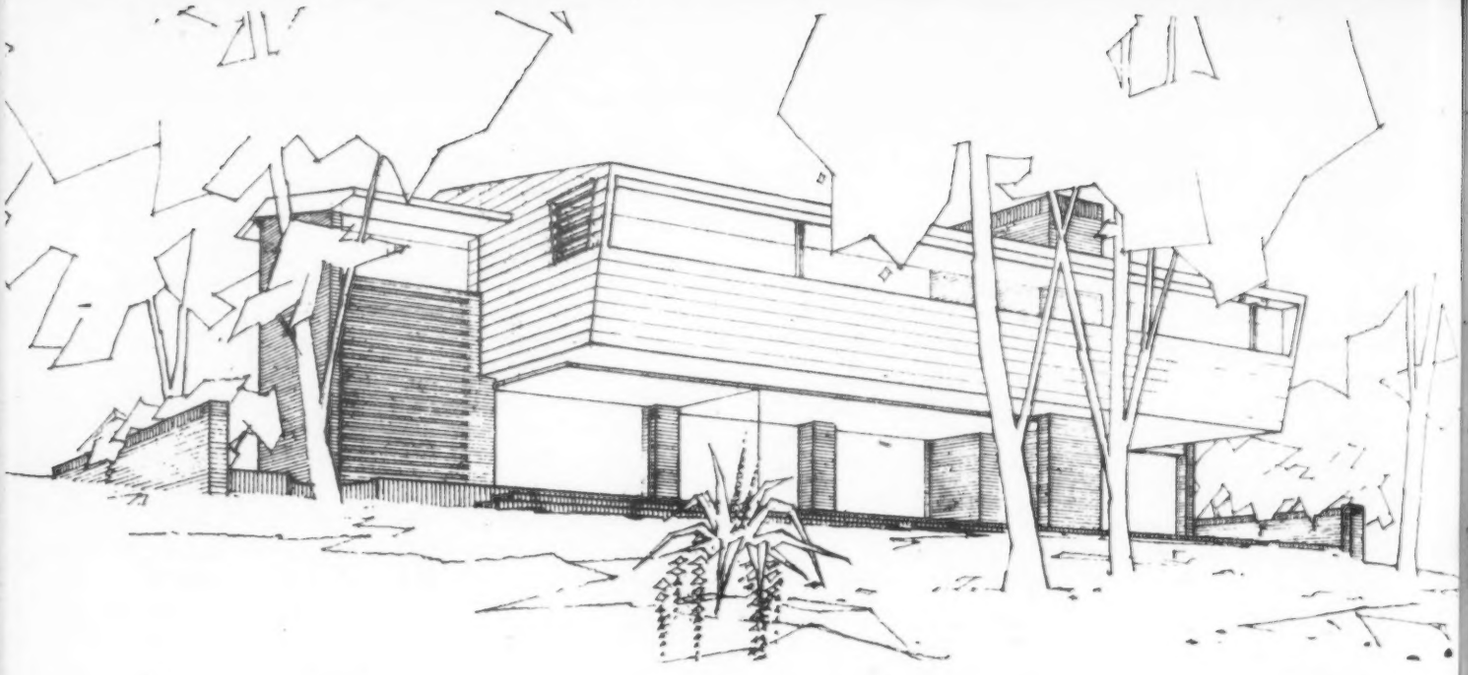

2. COMMANDING A VIEW OF THE RIVER NEAR PEORIA

Schweikher and Elting, Architects

THAT sloping sites offer opportunities as well as problems is evident in this house which is so cleverly, yet so logically, related to its location. An ingenious split-level scheme provides the living room floor half a story above the entrance level, and the bedroom floor half a story down, as shown in section and plans. The basement is another half flight down and provides a required photographic darkroom as well as storage and the heater room. The owners' bedroom is adjacent to the study on the main living room floor and the two guest rooms on the lower floor open onto the terraces. The house is to be of California redwood inside and out, with local brick used for chimneys and retaining walls.

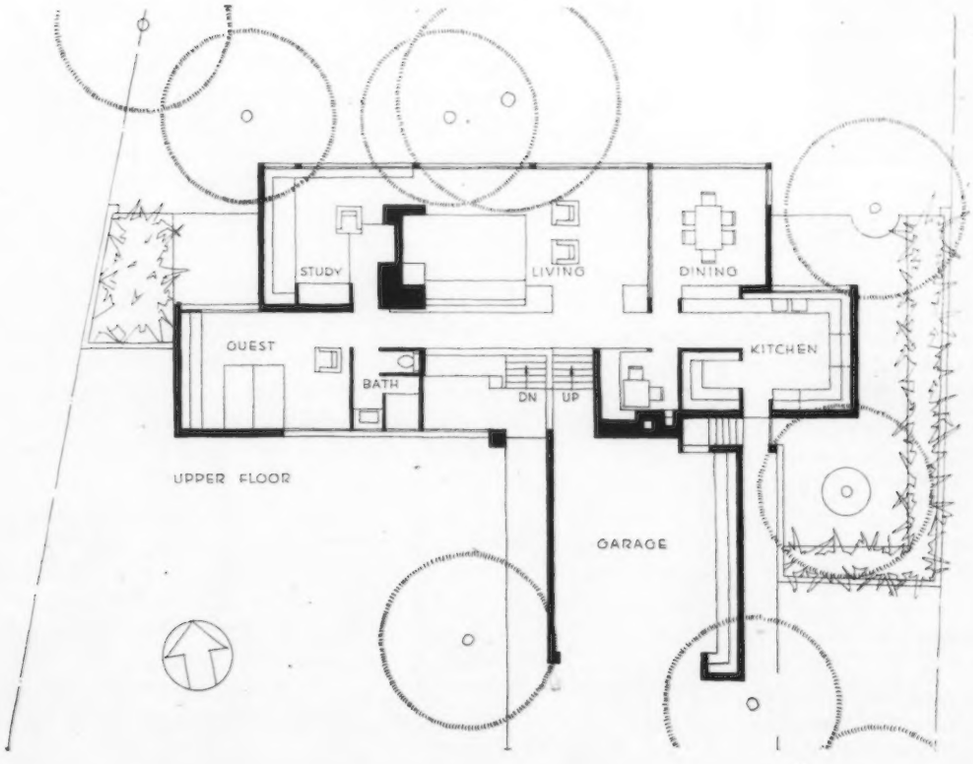

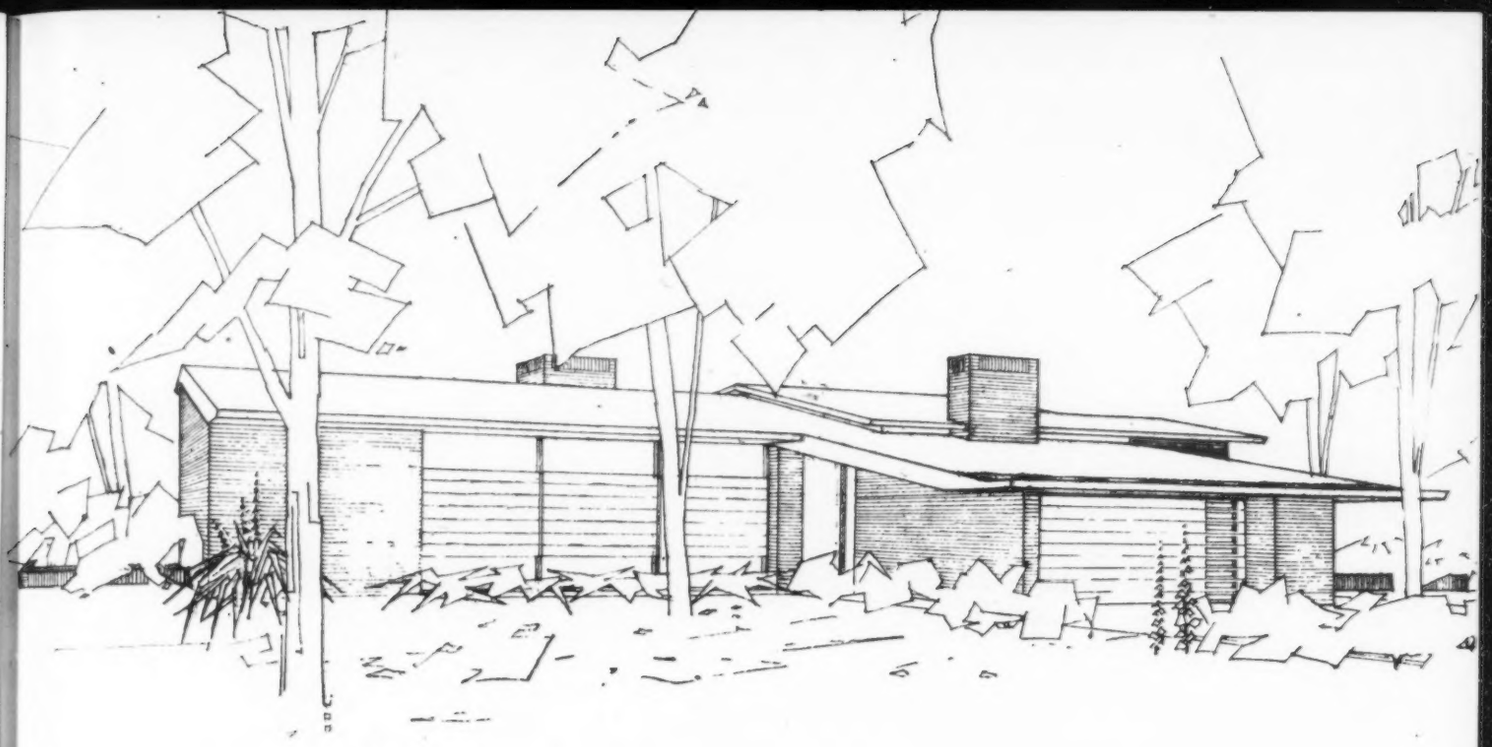

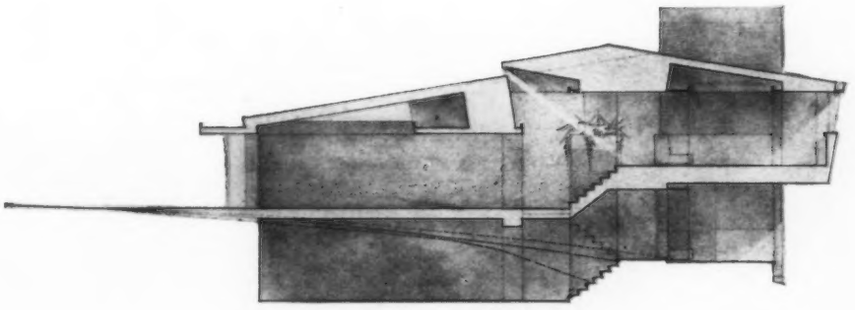

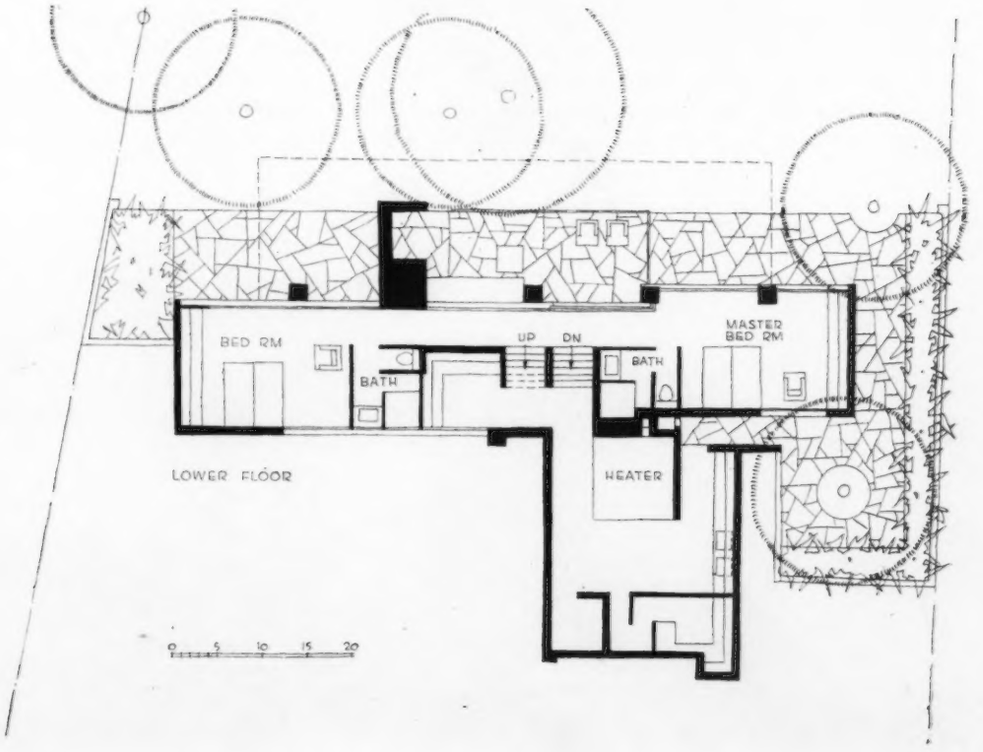
BED RM
BATH
UP
DN
BATH
MASTER
BED RM
LOWER FLOOR
HEATER
0
5
10
15
20

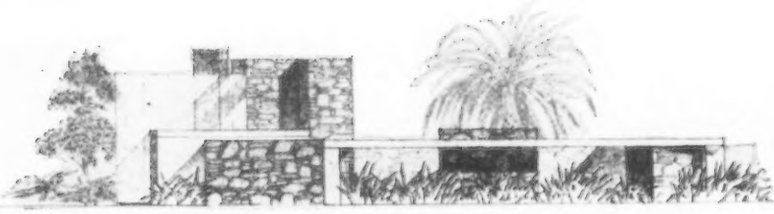

3. AN OASIS IN PARADISE VALLEY, ARIZONA

Schweikher and Elting, Architects



IN A design which reflects the expansive desert and exhibits a fittingly autochthonous character, every facility is provided for relaxed informal living, indoors and out. In addition to the ever-present flagged terraces and the patio, the entire roof over the living-kitchen-dining area provides an open planted terrace on which to enjoy the warming sun, the glowing sunset, or the brilliant starlit sky. Guest rooms are independent, even to having their own kitchenette, yet the spacious living room, with its interesting segmented north wall, and the glass-enclosed "observatory," provide for congenial gatherings, well protected from winter breezes. The house, primarily for winter vacations, will be of stone, concrete and glass.

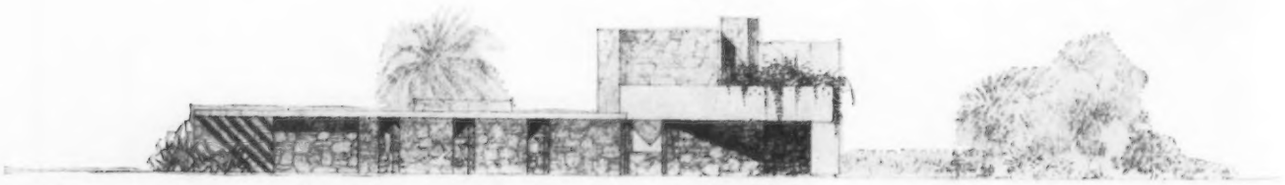

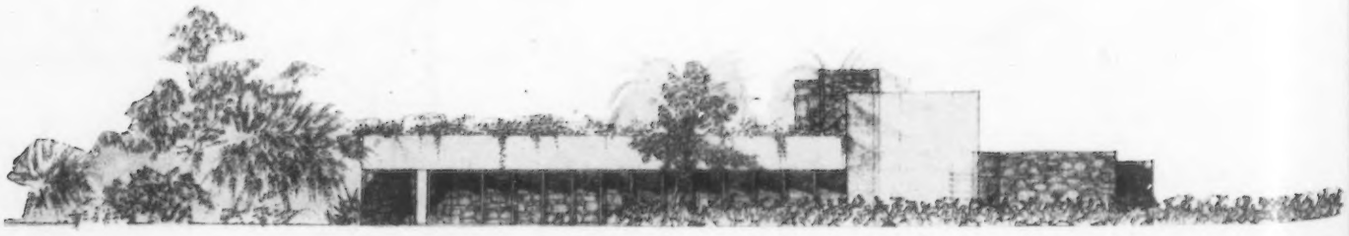

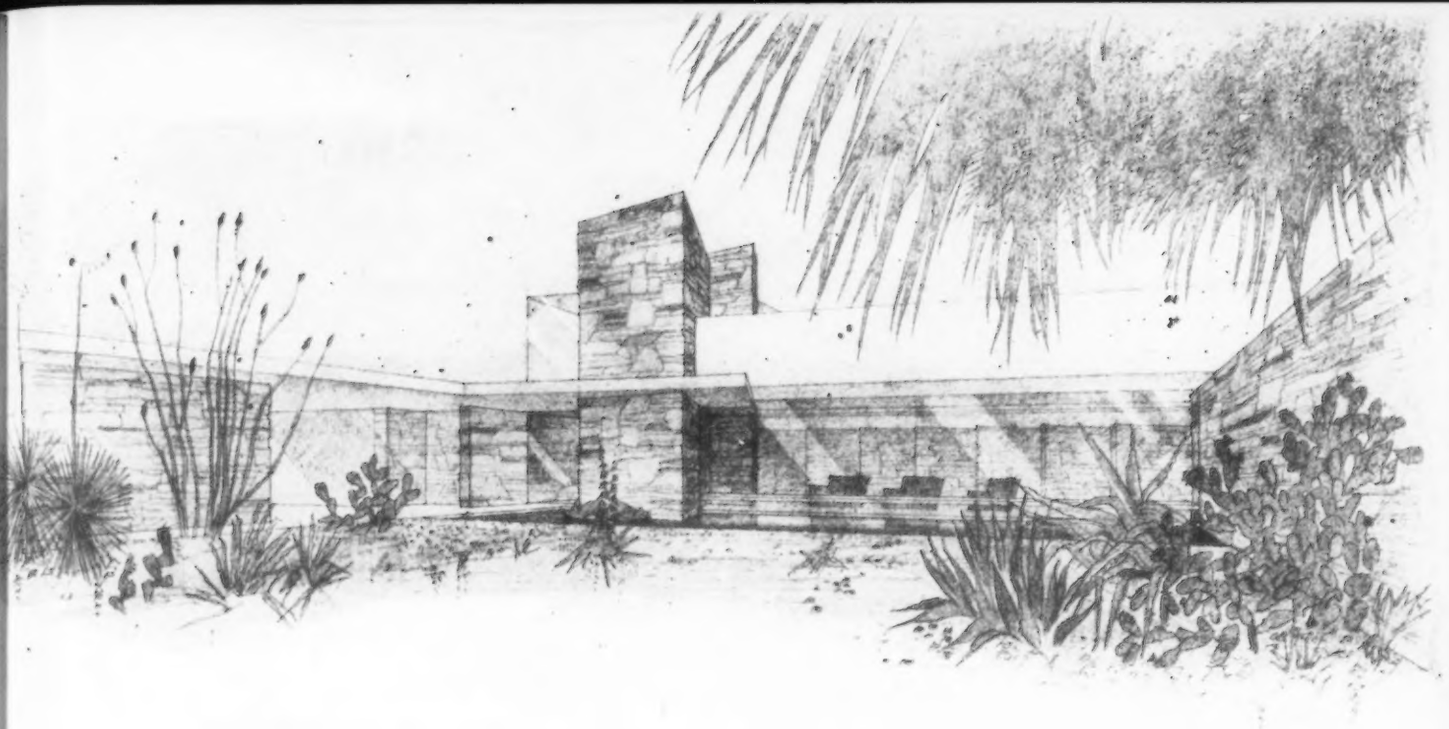

The patio, toward the living room

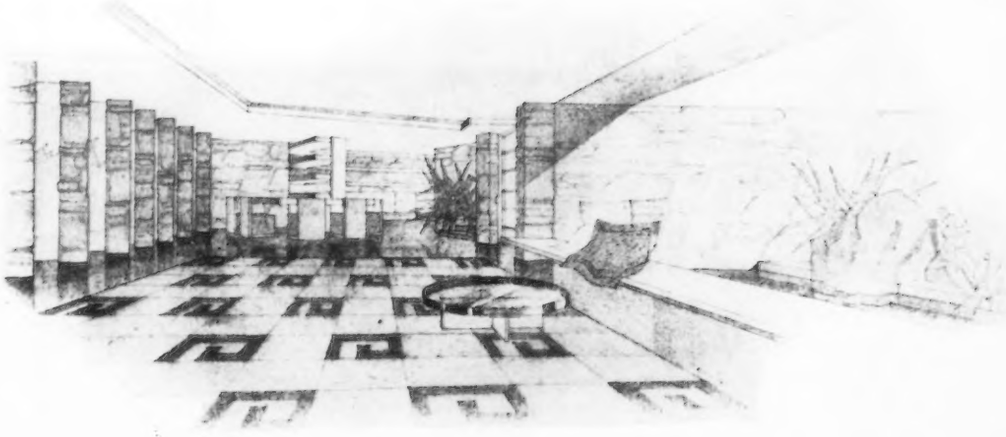

The living room, toward the dining area

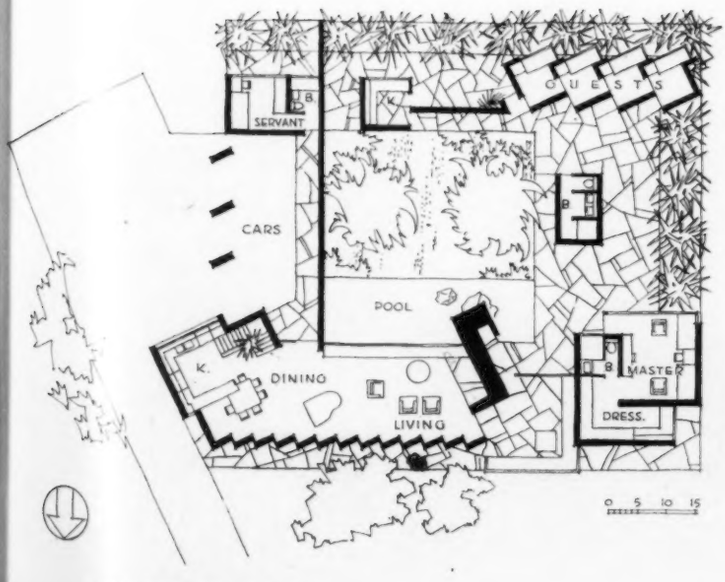

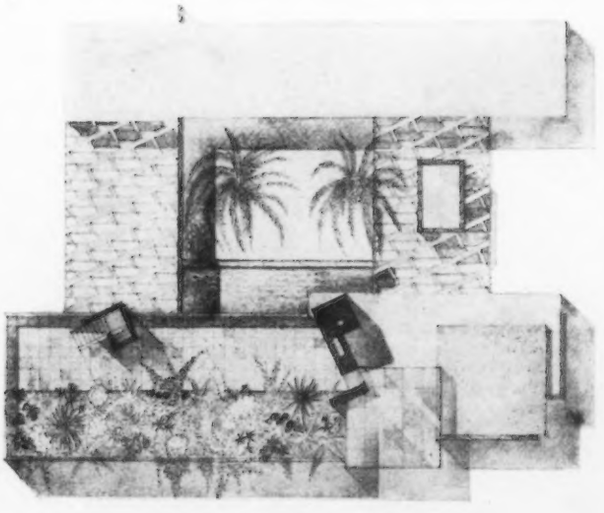

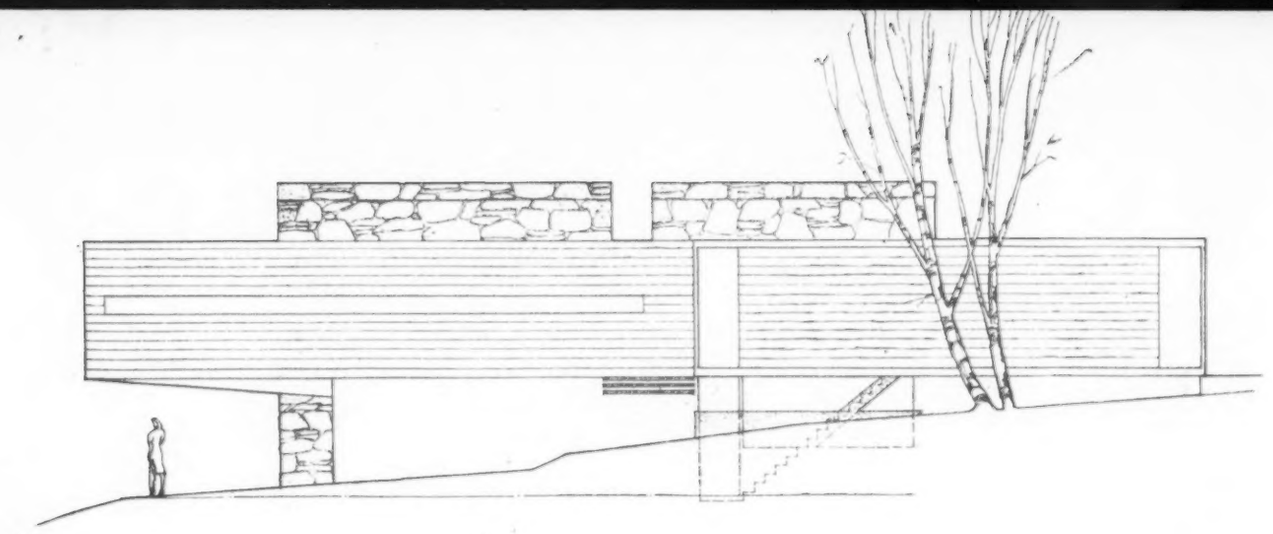

NORTH

LOWER FLOOR

4. WITH A LAWN FOR A ROOF

Schweikher and Elting, Architects

AGAIN making the utmost of the hillside slope, this design provides a broad level grassed terrace by placing it on the roof of the long south wing and continuing it to the roofed stone terrace, which in turn serves as the ceiling of play terrace below, next to the child's bedroom. The glass wall of the living room looks out on this lawn with its planted border-box and on beyond over the creek to the east. The dining end of the living-dining room also enjoys the expanse of eastern view. The library-guest room has its own hearth-fire wall continuing the line of that of the living room and forming companion masonry mass featured in the north and south views.

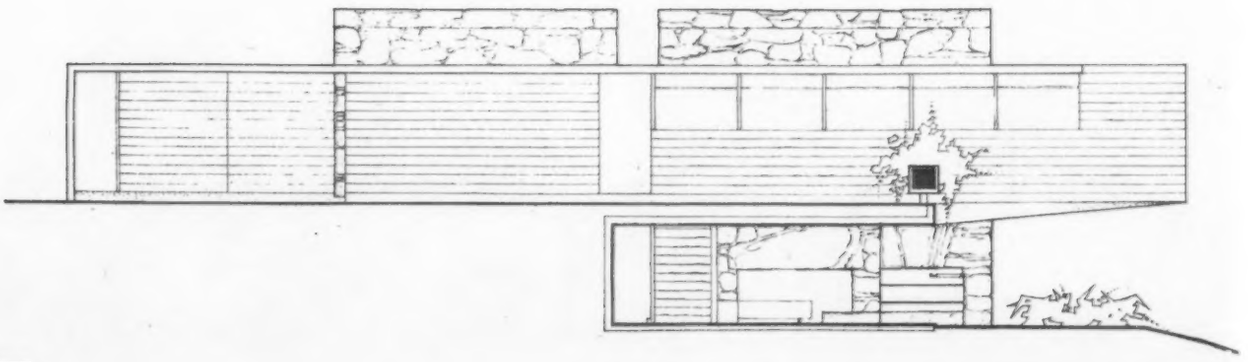

SOUTH

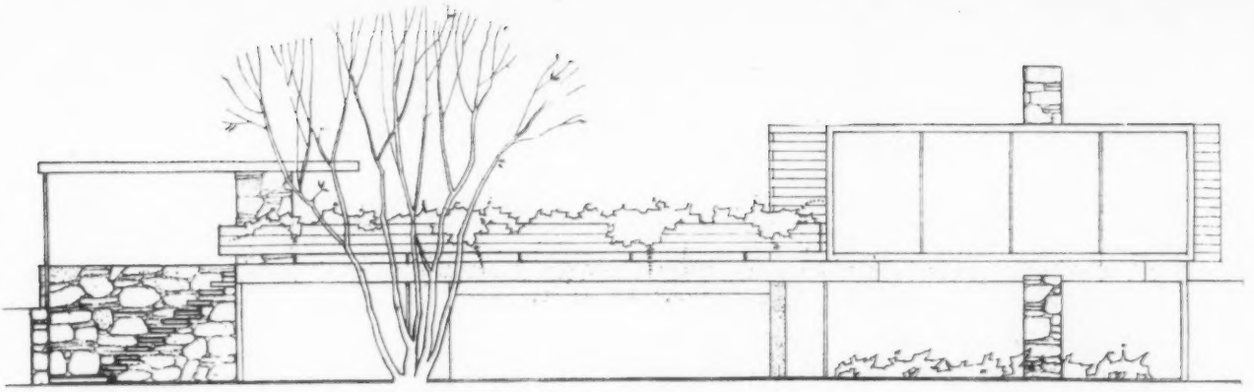

EAST

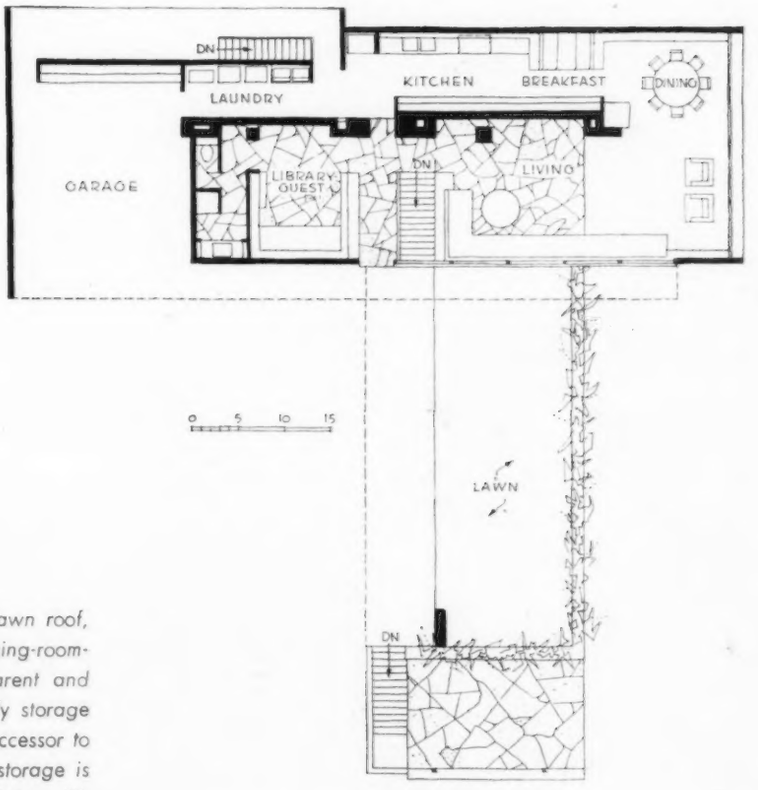

UPPER FLOOR

The bedroom wing is protected and insulated by its lawn roof, which cantilevers out to form a sunshade. The dressing-room-bath arrangement gives greater privacy to both parent and child, and serves as a sound buffer as well. Orderly storage space along the corridor wall provides a welcome successor to the prewar (and easily cluttered) cellar. Additional storage is supplied in the heater room. The house is to be near Quincy, Ill.

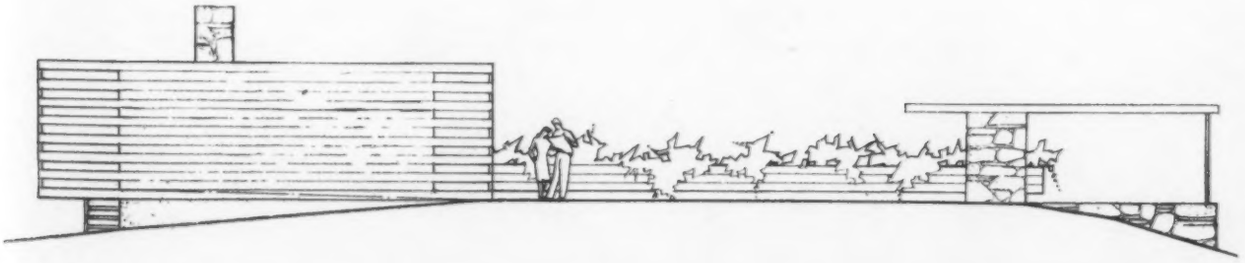

WEST

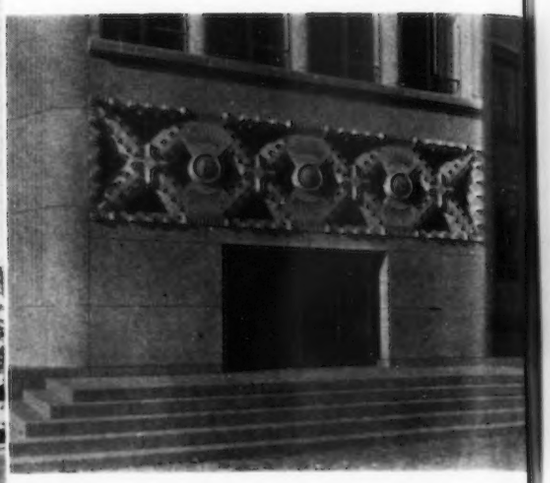

MR. OUD EMBROIDERS A THEME

Shell "I.B.M." Building, the Hague

J–J. P. Oud, Architect

THE RECORD publishes this building with the question, what does it mean in the design cycle?

Some twenty-five years ago, the young J-J. P. Oud of Holland was one among a small number of great leaders who shared a fresh insight. They found architecture too cluttered with fairy tales, Latin, and obscure reference, to make coherent sense. So they swept the boards clear of all embroidery and determined to tell the story of their own day, and tell it in terms only of clear, factual, direct, and current speech. It is scarcely necessary to recount what subsequently happened. They largely won the day. In common with all great art, the best works these men produced held up the mirror to life, gave the community what only great art gives — a deeper self-recognition.

Small artists always had difficulty with this more austere form of expression. In unimaginative hands the "plain facts" were dull, meager, ugly, and insufficient. And sometimes that was the nature of the program, not remediable by any straightforward handling.

Here, now, is Oud himself resorting to embroidery. The plan of the Shell Building is hard to distinguish from straight academic. Its major forms seem to be not enascent from the problem but are recognizable as repertory out of the architect's notebook. The very insistent, heavy, separate, imposed pattern of "decoration" seems visually related not to a keen process of expanding apperception but rather to the pleasant reminiscences of peasant art.

There is no doubt that large sectors of the public will find this a "pretty" building. But for an architect of Oud's stature such an aim would not have been high enough. What did Oud find lacking in his earlier approaches? In this instance was he unconsciously slipping back into an easily popular answer or was he seeking something new?

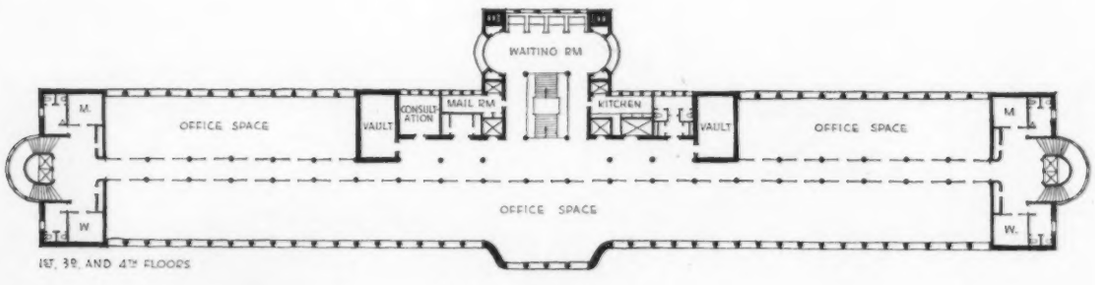

1ST, 3D, AND 4TH FLOORS

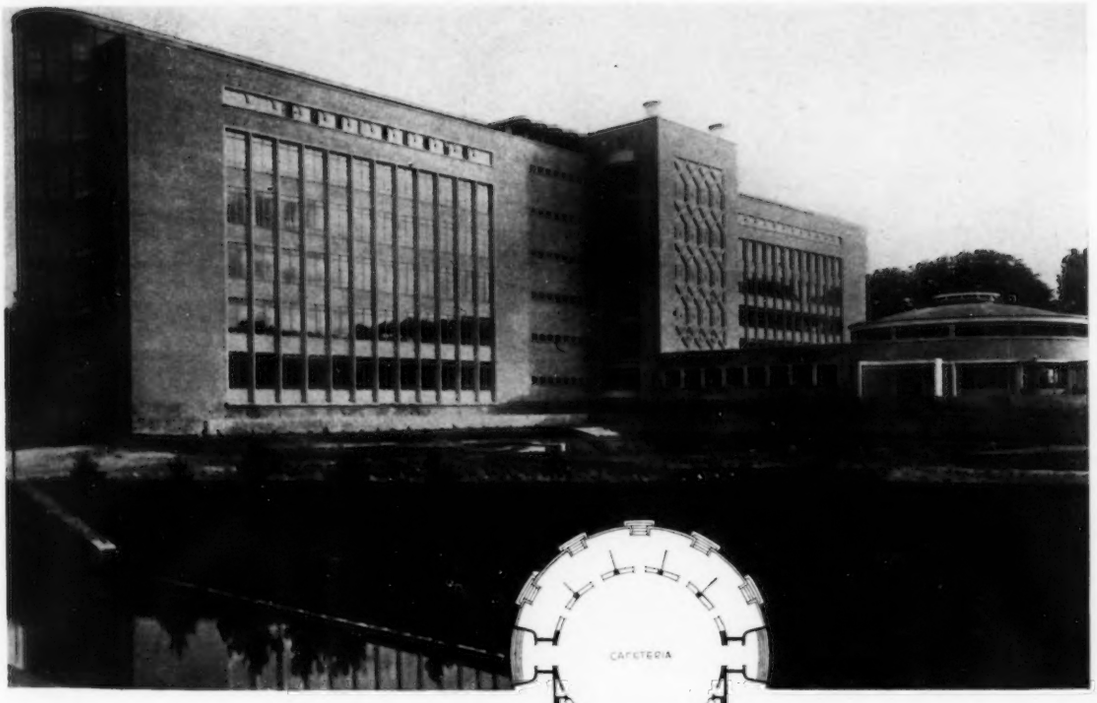

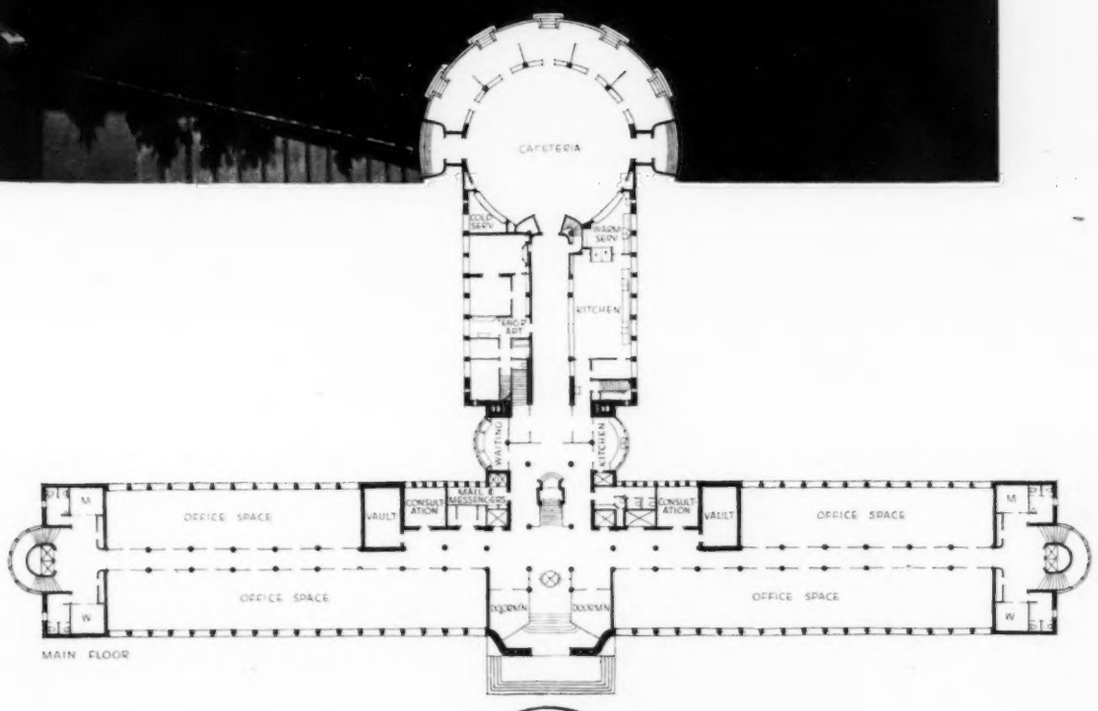

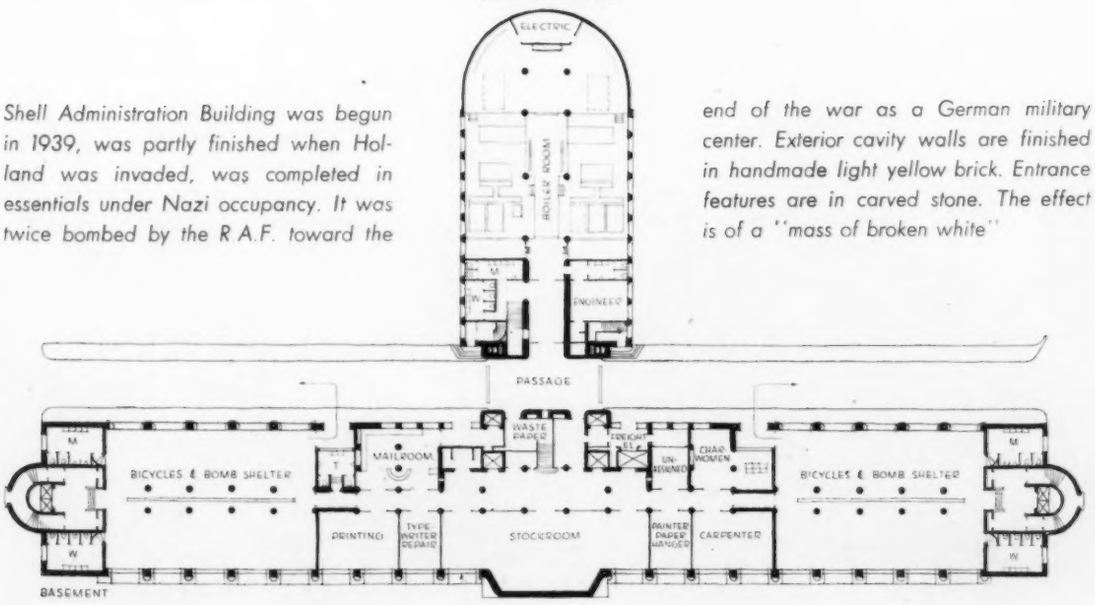

Shell Administration Building was begun in 1939, was partly finished when Holland was invaded, was completed in essentials under Nazi occupancy. It was twice bombed by the R.A.F. toward the end of the war as a German military center. Exterior cavity walls are finished in handmade light yellow brick. Entrance features are in carved stone. The effect is of a "mass of broken white"

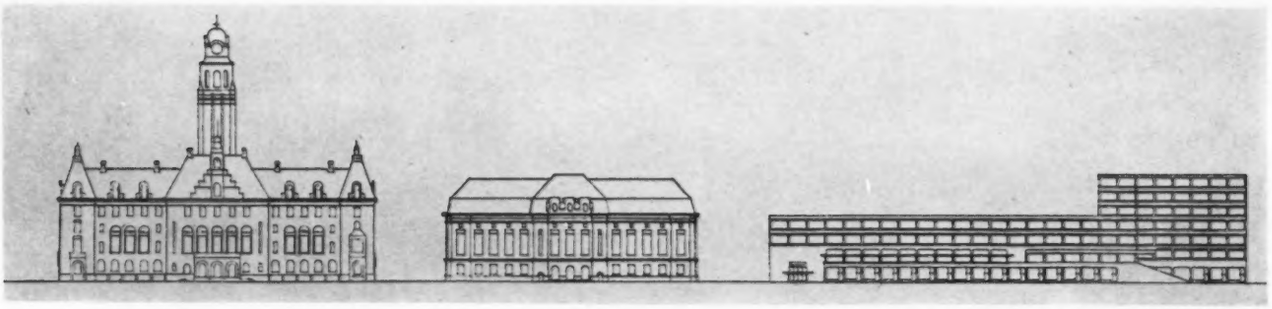

Illustrations courtesy of the Museum of Modern A

Oud's 1926 Stock Exchange Project: above shown with two adjacent existing buildings; below shown in isometric projection

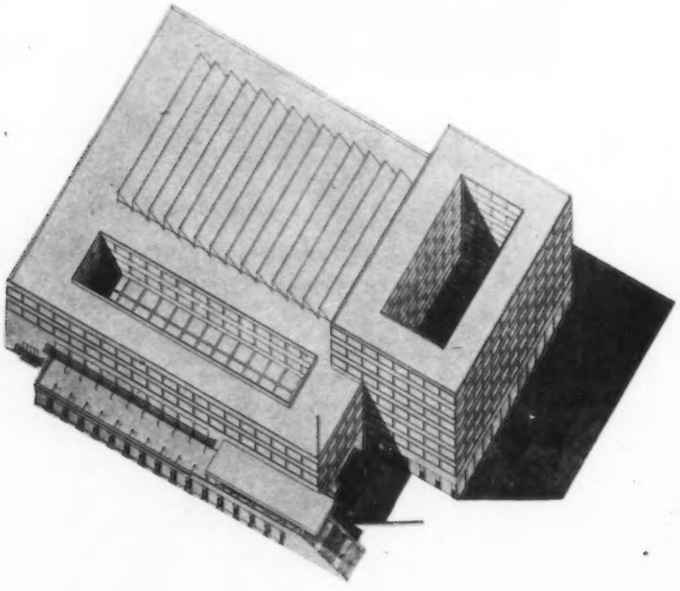

The evidence was submitted to American critics. Comment from those who made replies was largely centered on the question, "what makes architecture human?"

In Oud's former work, such as the famous project of 1926 for the Rotterdam Stock Exchange (see above) the answer was posed in terms of the great building fundamentals: clear organization; the large handling of scale: careful adaptation; the atmosphere that arises out of the intangibles of the handling of space, of color, of sequence and development; the craftsmanlike handling of materials and the sensual exploitation of their natural properties. The Stock Exchange project was rejected, being ahead of its time.

Oud's 1943 projects for Rotterdam (opposite page) make comparison easy, being designed for the very same city neighborhood (see the same tower in the background). It would seem as if Mr. Oud felt he could not rely on the public to rise to his former terms. While the public, in an interim of a quarter of a century, has been responding to the statement of its own new experience, Mr. Oud seems to be going back, to those simplicities of concept and those elaborations of execution by which fairy tale readers are so easily pleased.

Below, 1927 Workers Housing

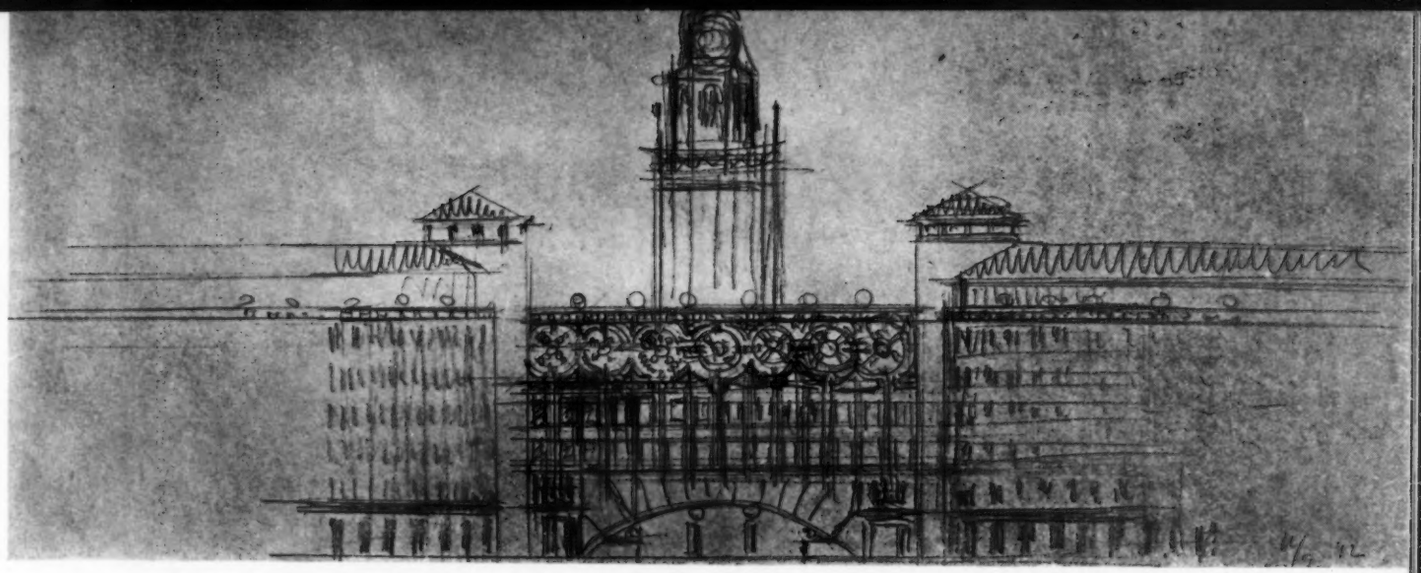

Above and right, 1943 City Center Project, Rotterdam

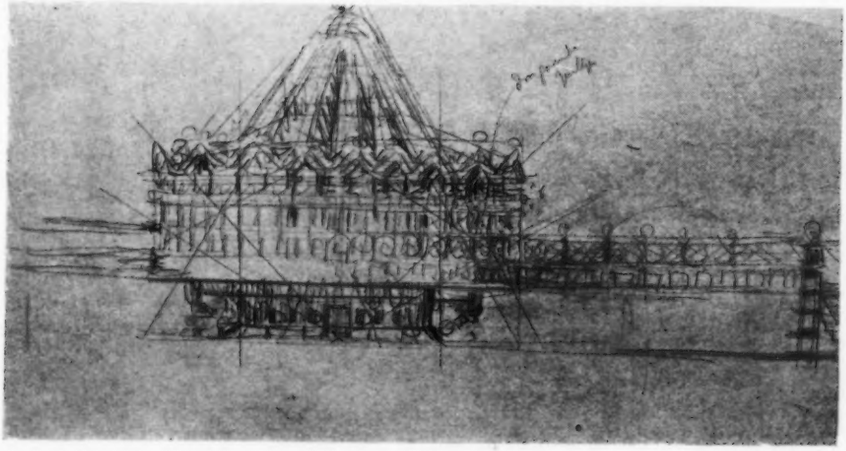

Below, 1939 Shell Building Showing Restaurant

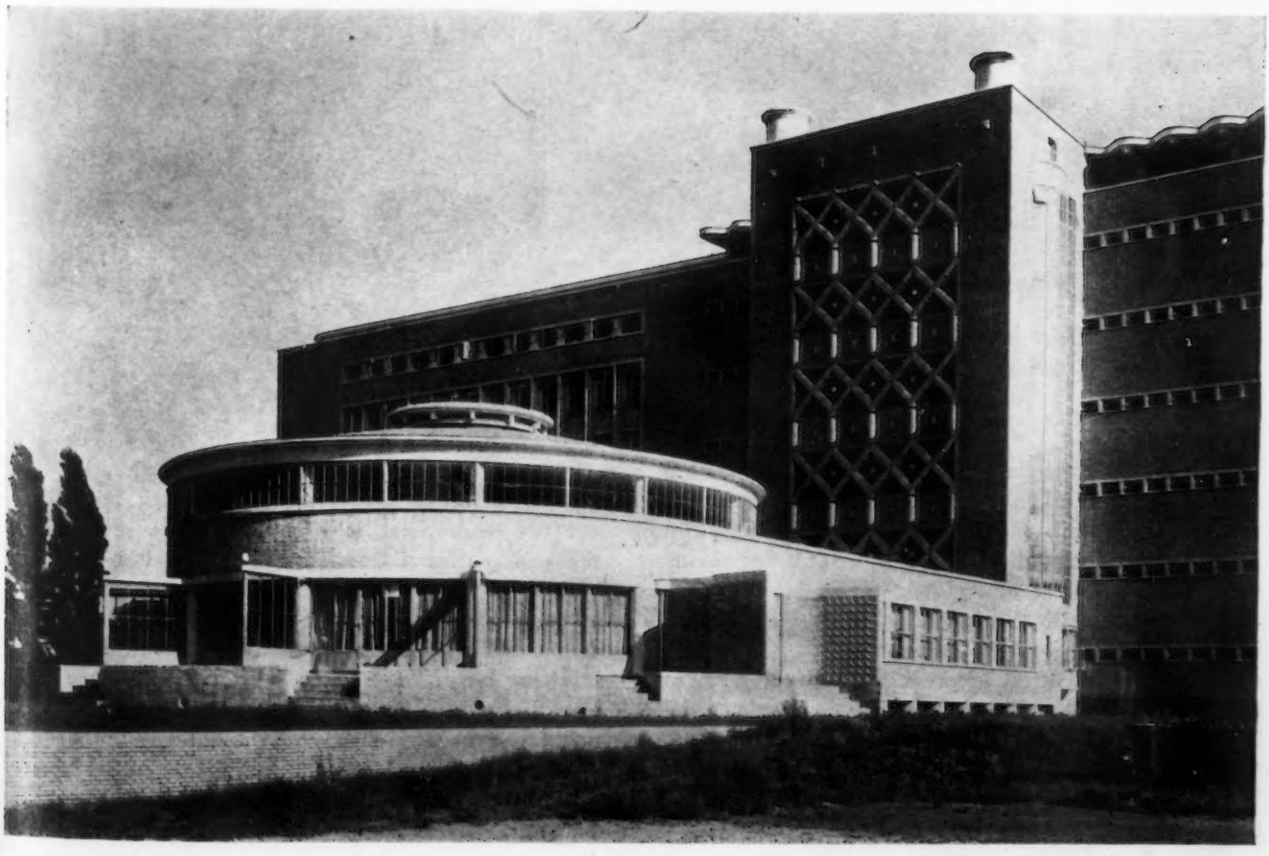

Decorative Details, Shell Building

Two opposite opinions were clearly expressed, both by competent critics, on the kind of decoration which is here seen in detail. One critic squarely declares that "Mr. Oud may be continuing his career of being among the most progressive of architects." He believes that this work may mark the end of a "transitional phase" in greater "maturity." To this critic, "some of the details seem to be of the greatest originality and full of Oud's particular quality of sensitive imagination." This goes contrary to the opinion just expressed. Another critic, expressing dissatisfaction, compares the "solemn and aggressive" details to the work on Hamburg skyscrapers 25 years ago.

RECORD editors are more inclined to agree with the general trend of the latter observation; but this is not the main point in bringing up the subject. For the question raised goes beyond Mr. Oud or any other individual. The question relates to those irrationalities of human nature, those elements of sheer play, those demands for symbol and story, that once found their frank outlet in "decoration." Is every designer quite sure that all his "functional" devices are quite so inevitably a response to rational need? And if, on quiet examination, some of them are not, how might natural human irrationality be better acknowledged — so as to lead not to "compromise" but to a deeper apperception?

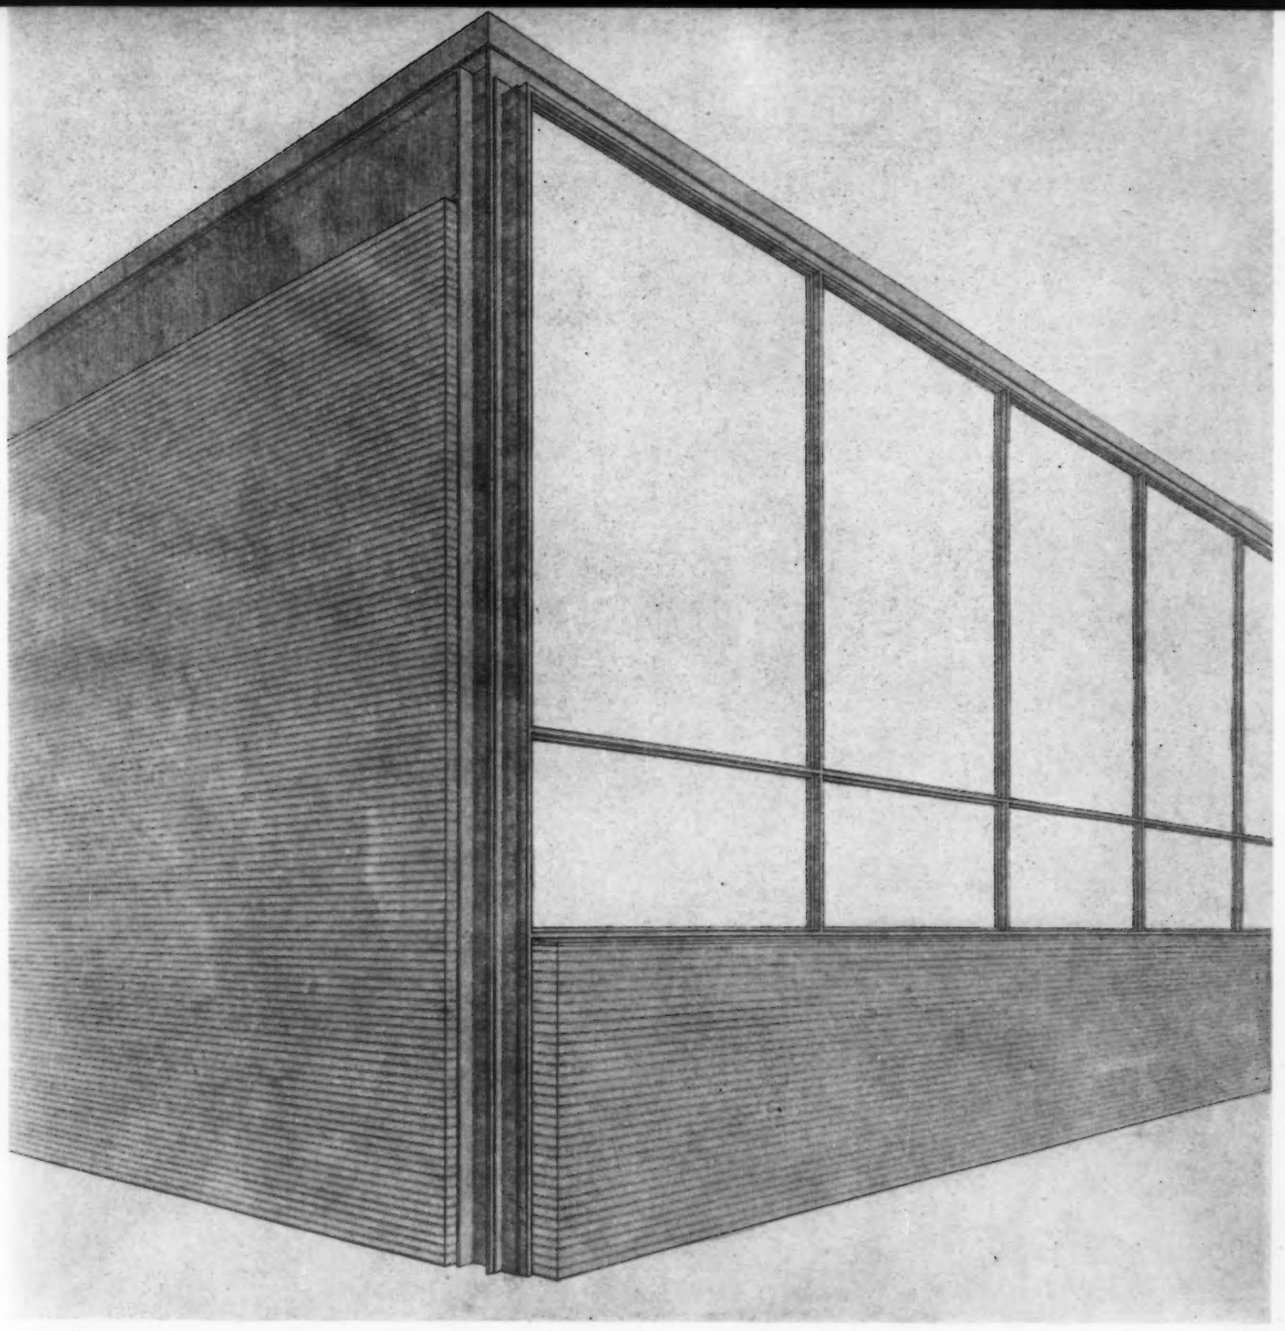

ARCHITECTURE "SPEAKING FOR ITSELF"

Library and Administration Building, Illinois Institute of Technology

L. Mies van der Rohe, Architect

WHEN not another single line may be removed, when no part can be more simplified in form or more generalized in use, when nothing can be more accurately placed, Mies van der Rohe is prepared to release a design that may have occupied years of study. It is, as an English writer has declared, "that sensitivity of line, and that precision, purity, and sensitivity of design in general," which "has placed its author among the handful of contemporary leaders in architecture, in spite of the small amount of work he has executed."

It was originally intended to reproduce these drawings as part of the November Building Types Study on University Libraries. Yet the significance of the work so transcends any special field of building that publication has been put over until now to permit a more ample presentation.

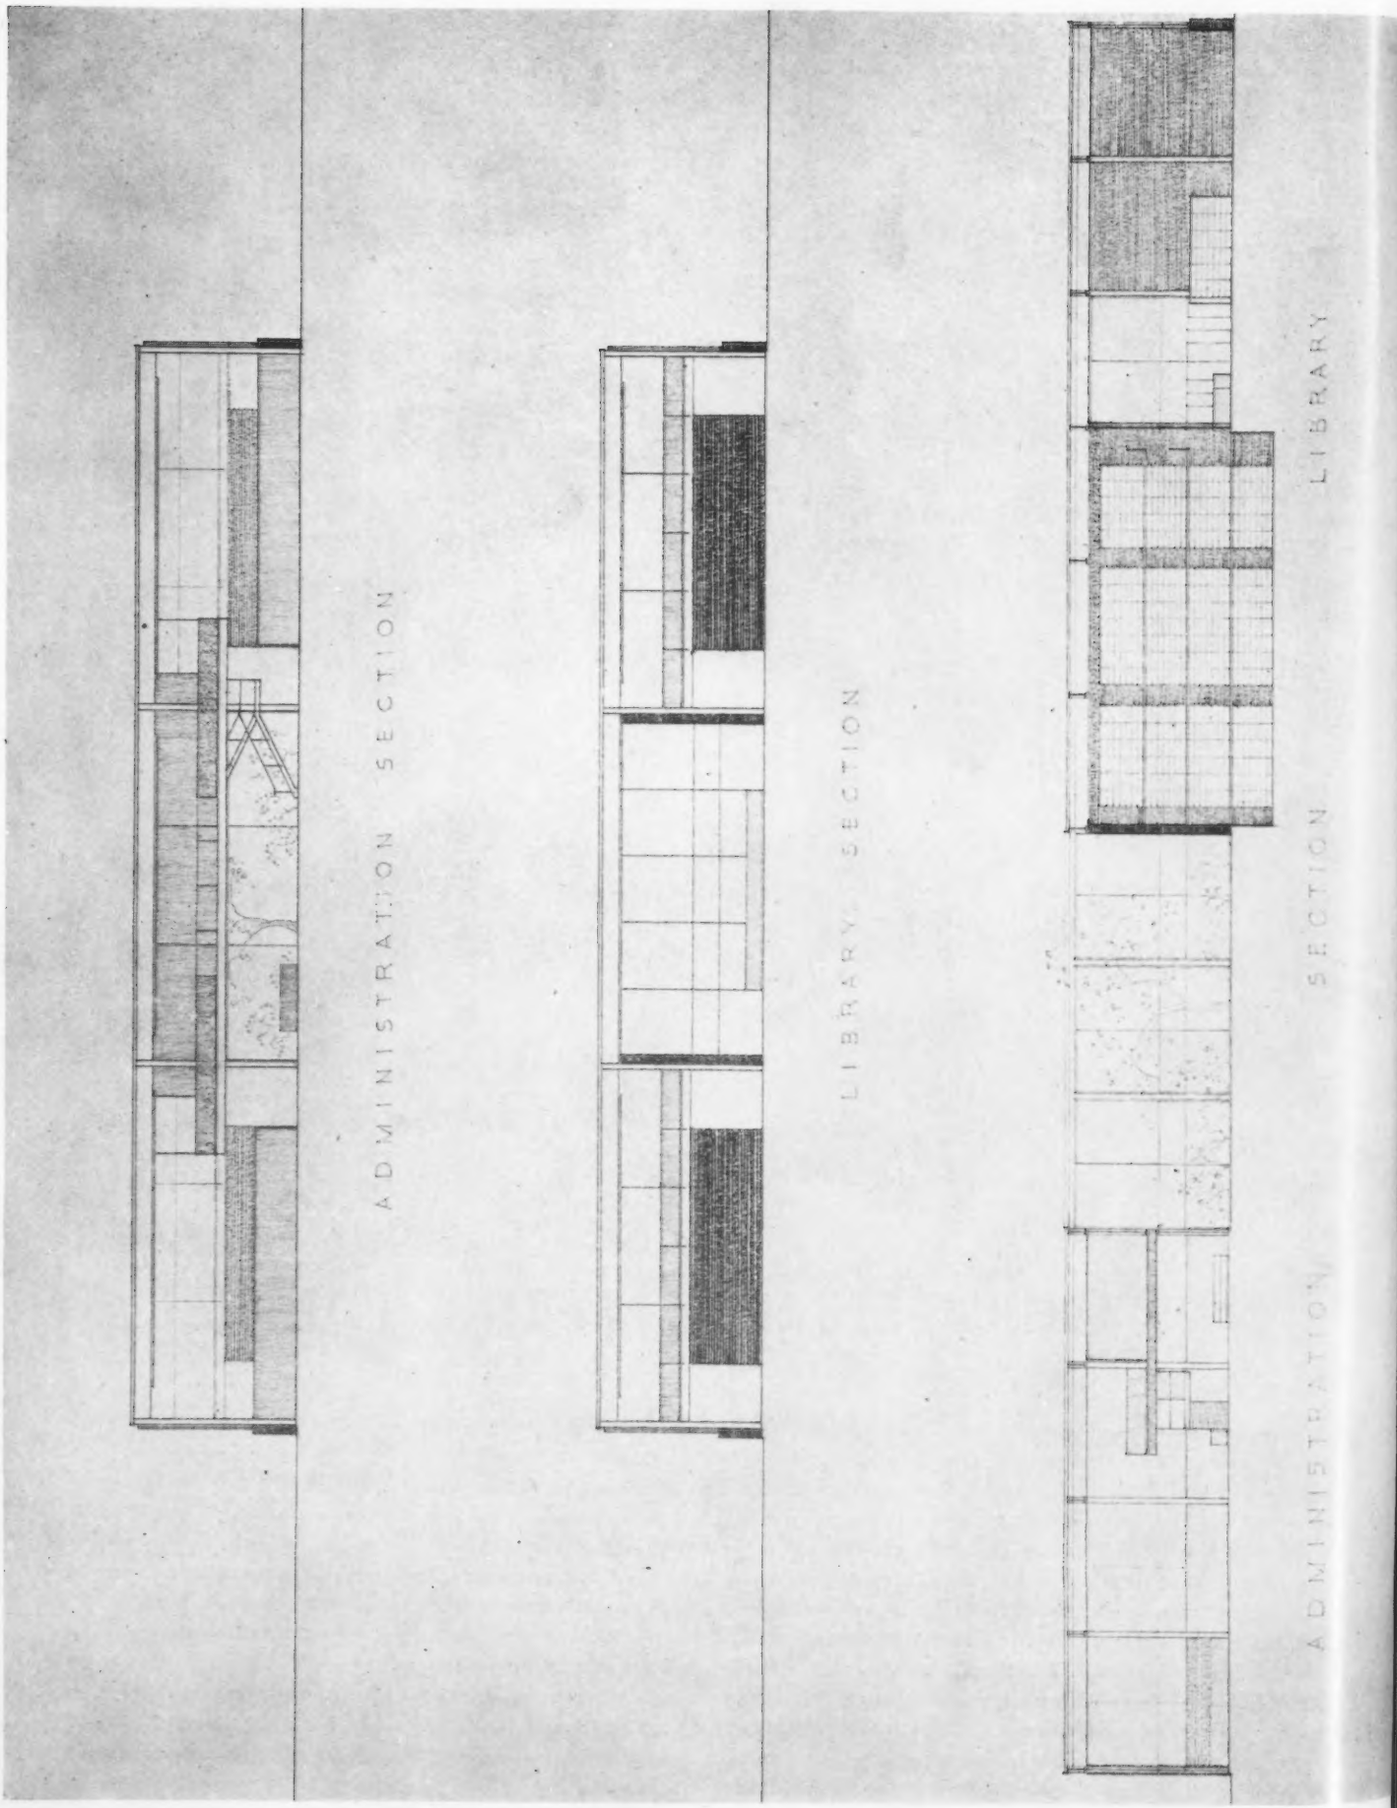
ADMINISTRATION SECTION
LIBRARY SECTION
LIBRARY
ADMINISTRATION SECTION

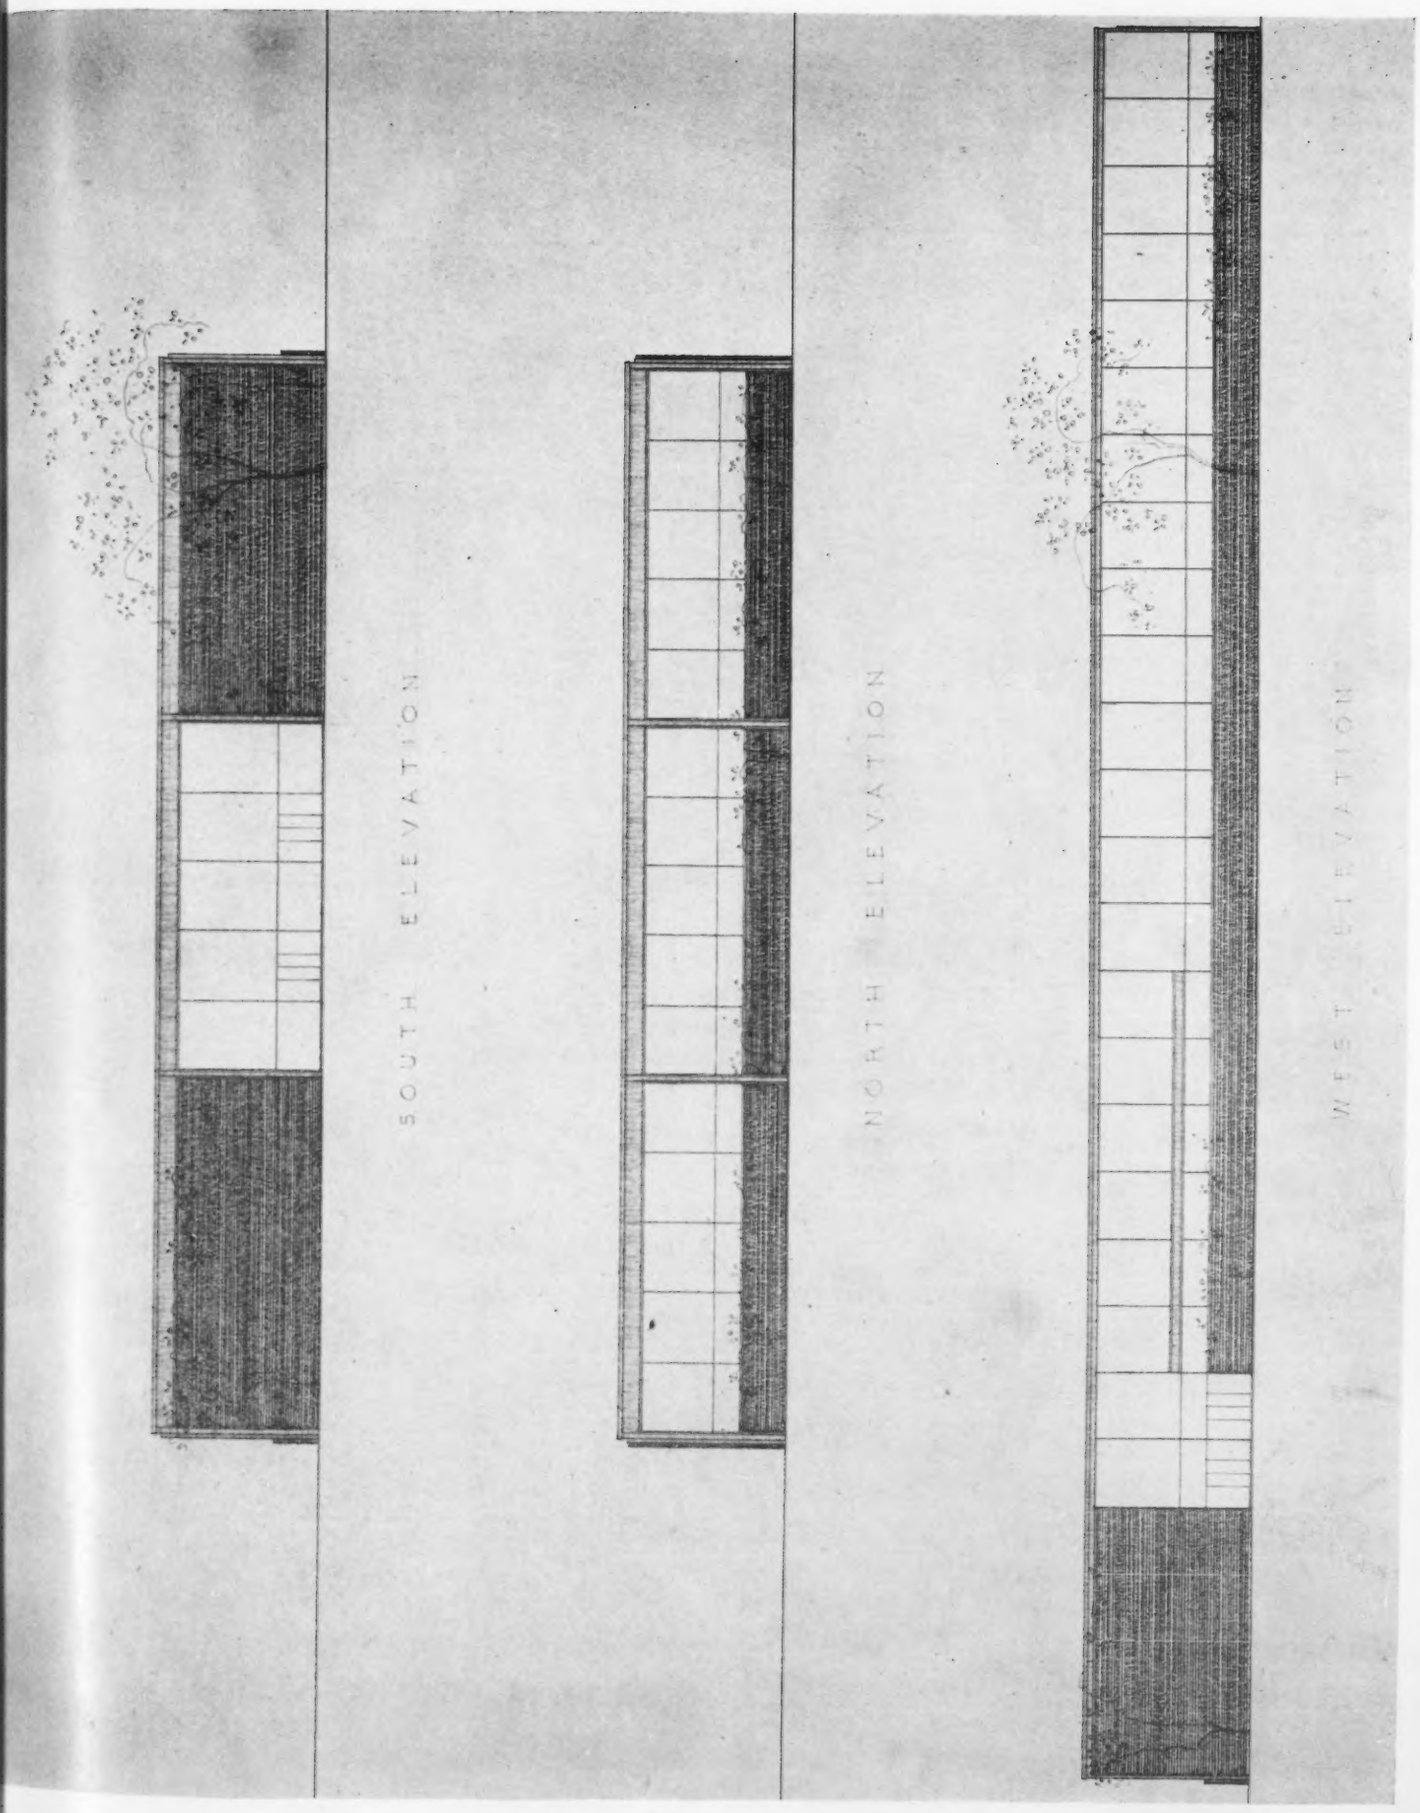
SOUTH ELEVATION
NORTH ELEVATION
WEST ELEVATION

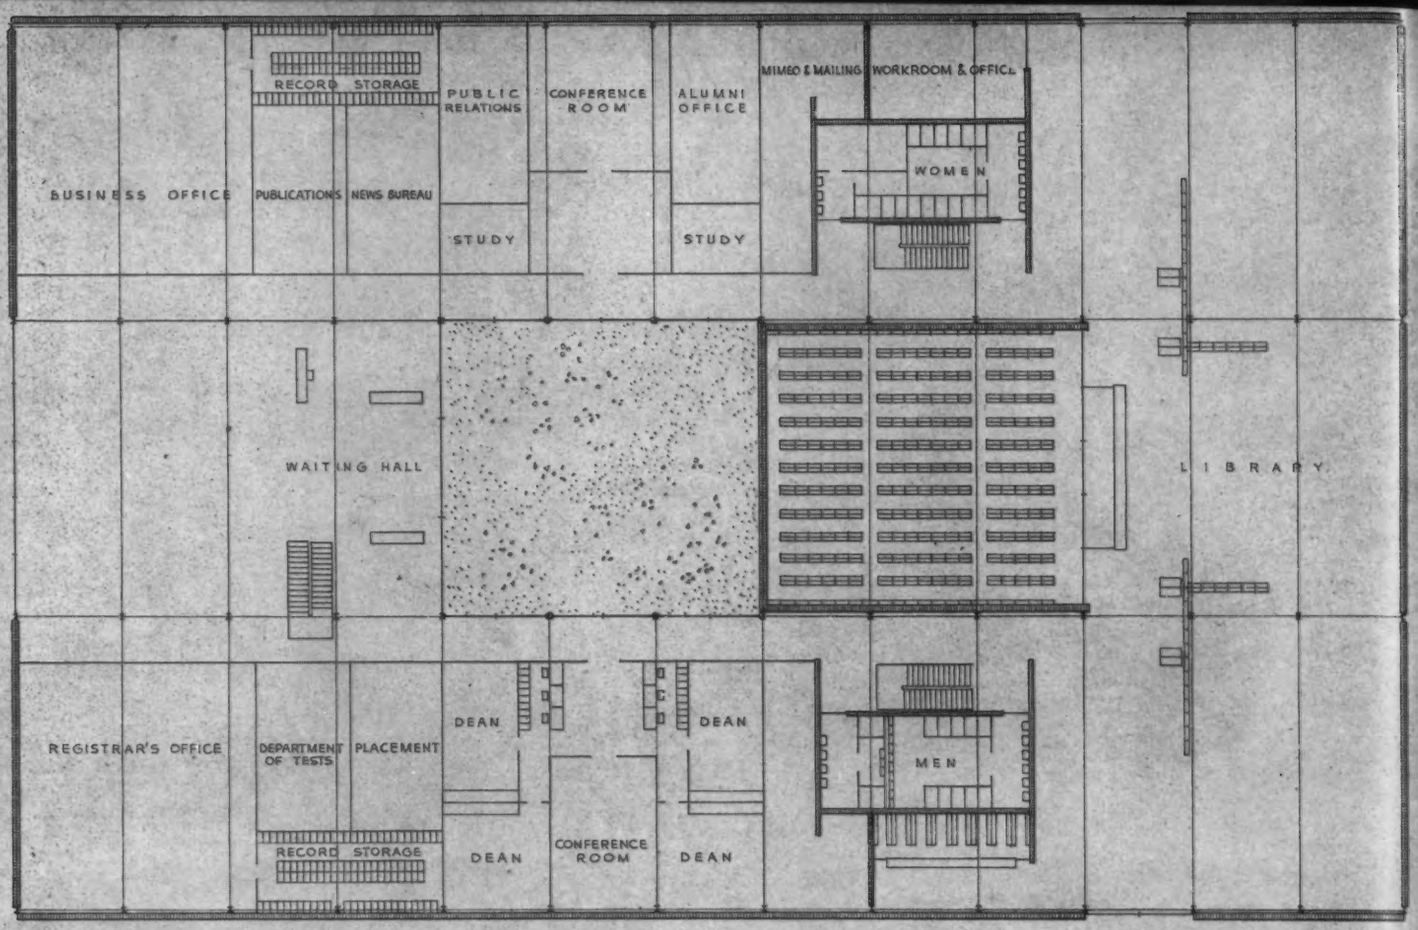

MAIN FLOOR PLAN

This library and administration building forms part of a campus plan for the Illinois Institute of Technology at Chicago, involving fourteen buildings among which only the Metallurgy Building has as yet been published. The structural system of steel frame yellow brick walls, and steel or gypsum partitions produces a gridwork so utterly simple that there can be almost any combination of spaces in the interior

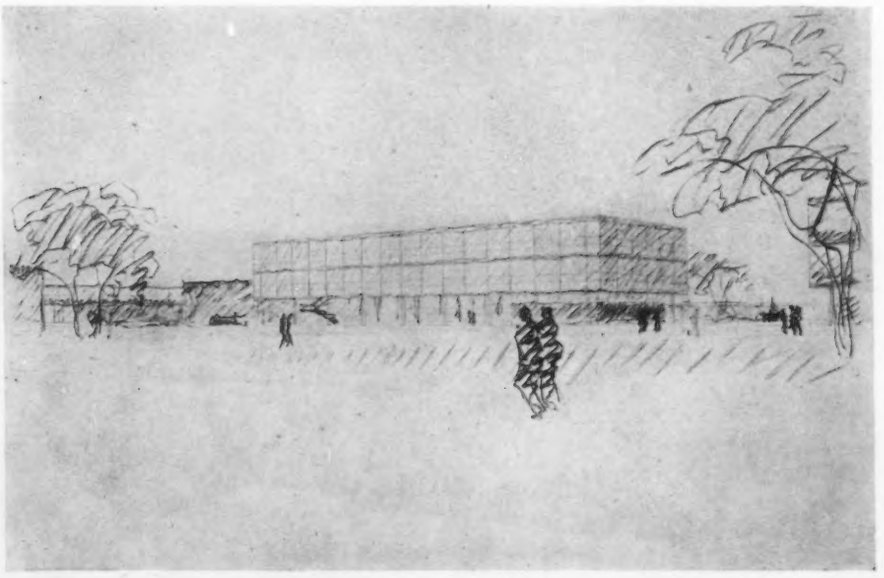

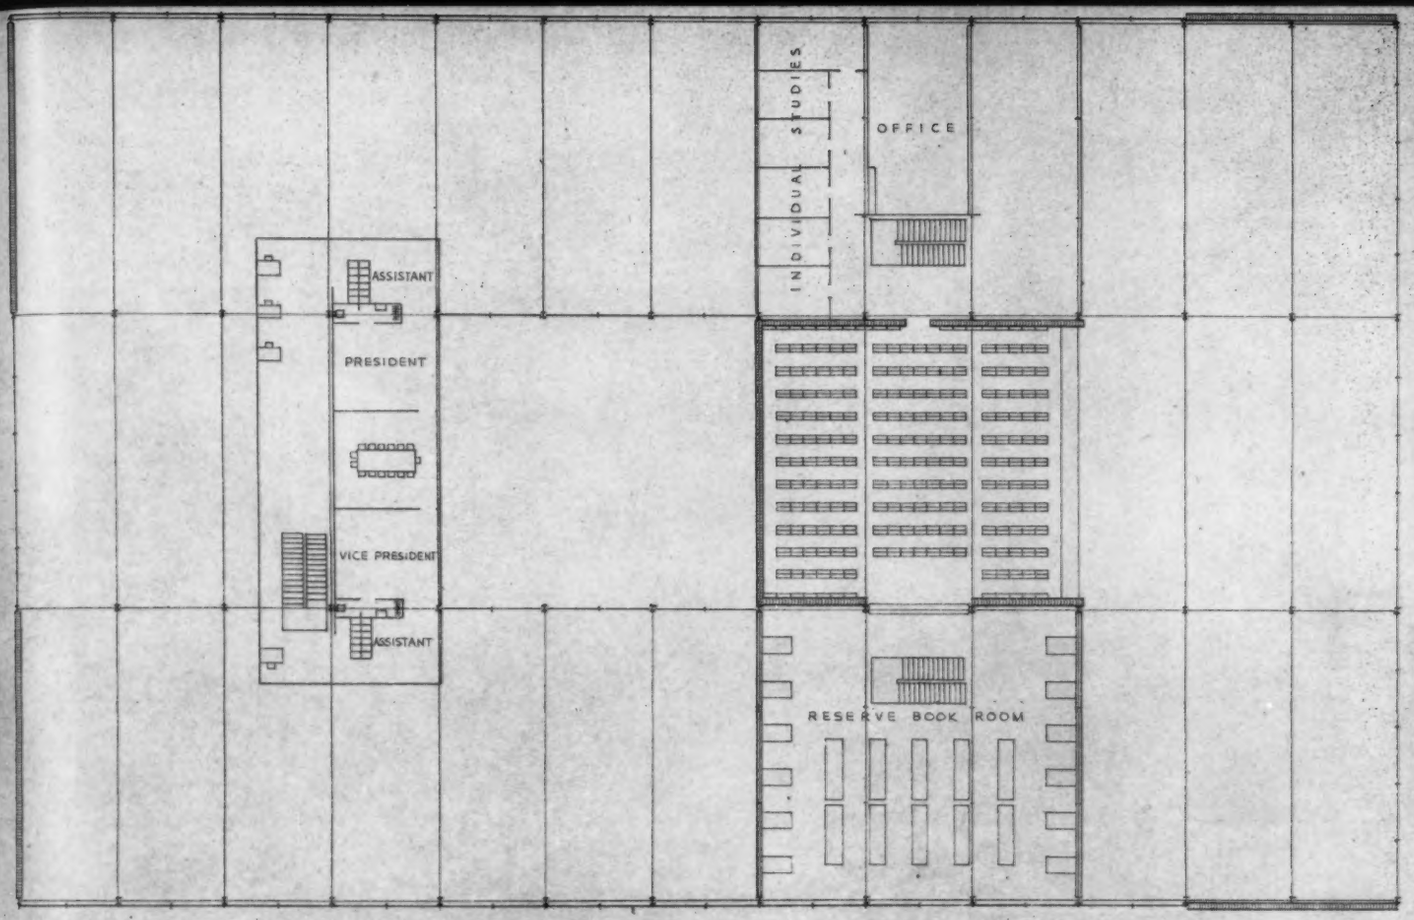

MEZZANINE FLOOR PLAN

So adaptable is this structural design that a multiplicity of subtle variations has been created among buildings of different heights, serving different purposes. The sketches on these two pages suggest the serene organization proposed for the campus as a whole, and exhibit the unmatched holography of the architect. On the two succeeding pages will be found elevations of this particular unit

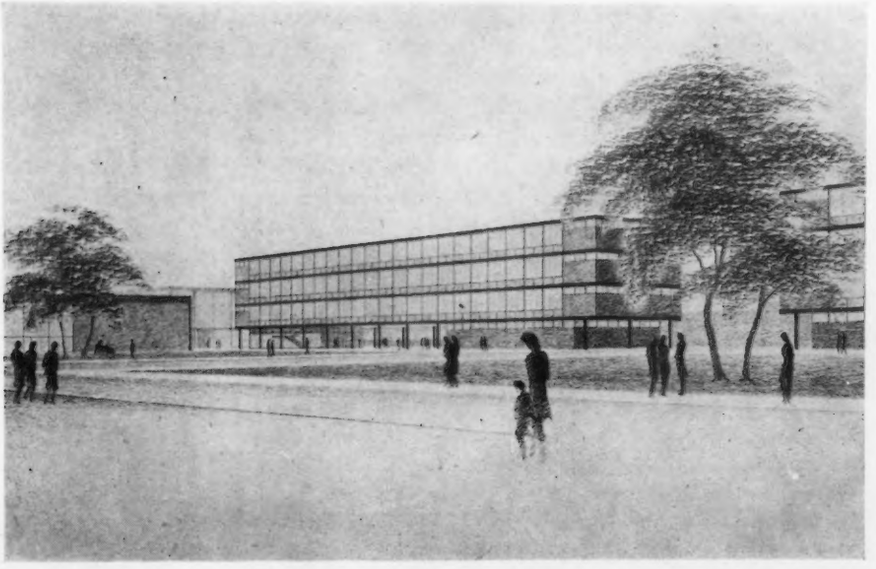

Hedrich-Blessing Photos

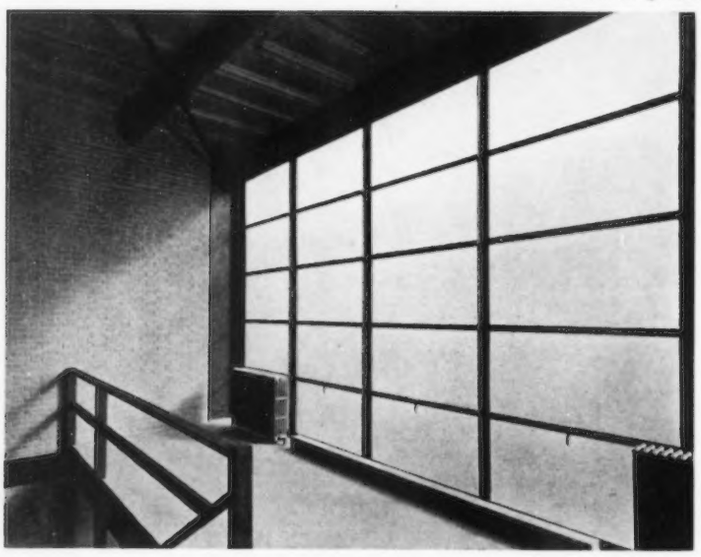

Five master details are so mastered as to serve interchangeably to produce ceiling and roof structure, wall angles underneath and alongside windows, a steel column within the wall, and a chase for pipe or conduit (photographs above, perspective page 85)

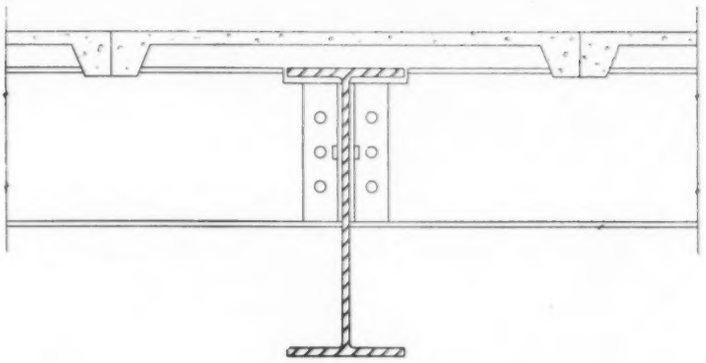

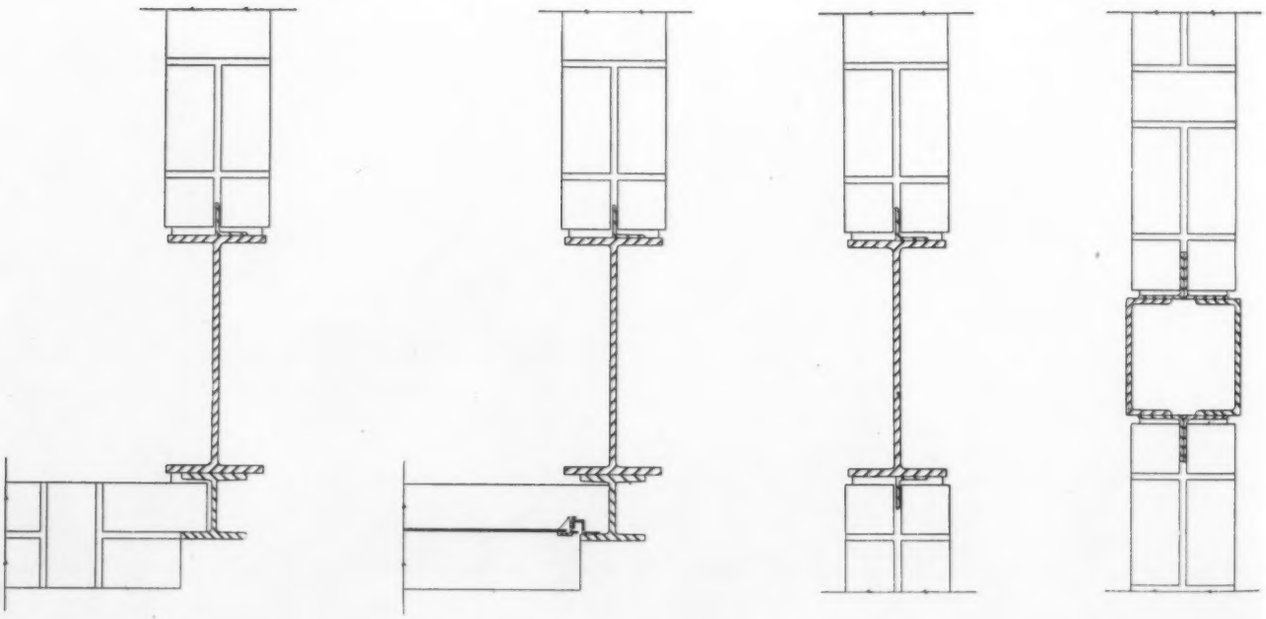

". . . anything that will make a plant a more desirable choice as a place to work, and anything that will add a per cent or a fraction of one to the efficiency of the men at work will readily justify its cost. . . ."

INDUSTRIAL BUILDINGS

ARCHITECTURAL RECORD'S

BUILDING TYPES STUDY NUMBER 120

In Collaboration with "Mill and Factory"

Hedrich-Blessing Photo; Norden bombsight plant, The Austin Company, engineers and builders

THE PLANT AS A PLACE TO WORK

By Roland Wank

Associate, Fellheimer & Wagner, Architects and Engineers

WARTIME production records of American plants astonished a world which already held an exaggerated belief in their powers. We were amazed ourselves, for didn't many of us ridicule at the start the seemingly impossible goals of 50,000 and 75,000 airplanes?

The extraordinary feat not only rescued the world, including American industry, from an unspeakable fate, but also instilled new respect for our machinery of production in the public, which through the depression years, began to nurse some uncomplimentary thoughts.

While the production miracle was no doubt a composite result of many forces — as, for example, governmental coordination of all industry — there can be hardly any doubt that wartime cooperation between labor and management was an outstanding factor. With the war over and cooperation badly cracked, performance is a good deal less impressive.

Labor relations, and partly connected therewith, public relations of industry, are critical elements in the struggle for survival of free enterprise. And, of course, the architect of industrial plants is concerned that his designs express, and his inventiveness and intuition assist, labor and public relations policy.

Paternalistic measures for labor welfare were in dubious repute long before the war. The many devices installed for the duration to tap new labor reservoirs, to compete for what labor there was, and to improve attendance and efficiency (as nurseries, shopping services, employee car maintenance and emergency road service) are likely to disappear without much trace. Right now in the larger industries both management and labor seem to consider it bad form for industry to offer any employee facilities or services unless they were first demanded and bitterly fought for by the unions.

Nevertheless, new plants built for war production lifted the entire concept of housing modern industry to a permanently higher plane. In contrast to many prewar industrial plants which just grew, and in which each new wing or building was compromised at the outset by existing conditions, wartime plants were usually planned from scratch, mostly in virgin territory with plenty of elbow room.

While they were moderately handicapped at times by materials shortages, this was amply offset by a certain ebullience and derring-do in their planning and construction. The penny-pinching in which corporate managements often indulge was not necessary, and stylistic notions which sometimes conflict with efficient design yielded to a basically mass-concept. Approaches,

Courtesy, The Bettmann Archive

"Early New England manufacturers must have taken a good deal of pride in their plants, judging by the careful disposition and attractive lines of their many-windowed, tower-topped buildings. . . . The swing toward the contemporary gleaming structure coincided with the growing independence of labor and the critical attention of the public"

parking, locker rooms, cafeterias, railroad sidings, sometimes airfields for shipping the product — all were conceived on the three-shift, seven-day basis, which was postulated by some peacetime thinkers of the preceding generation as the one reasonable way to operate modern technology.

Above all, war plants were new, and being new they benefited wholesale by all the architectural and engineering advances that were previously applied haltingly and piecemeal. Postwar planning of plants for satisfactory employee relations, as for other aspects, must thus start from a new benchmark, from a new level of bright, spacious, efficient civilization that is vastly ahead of the domestic and recreational surroundings of employees during their leisure hours.

The word "must" is more than a figure of speech. It seems evident that industry is now engaged in competition for labor, and that for a variety of reasons this condition is likely to persist for a long time, even through depressions. By and large, producers of goods having a high labor content are at a disadvantage in this competition. The needle trades, foundries, brickyards and other enterprises where payroll is a dominant part of production cost generally depended upon foreign and second generation labor which is practically extinct, or sharecroppers and hillbillies who aren't as eagerly submissive as they used to be. Crowding, excessive heat, noise, smell do not appeal to the majority of present-day work-seekers, the less so since millions of them are now familiar with the last word in highly mechanized and partly automatic war production. The brawny son of toil has been succeeded by the self-assured, wide-awake graduate of high or trade schools, even colleges, not looking for manual labor, but rather for the intelligent, semi-engineering tasks of operating precise and powerful machinery.

The more modern industries — especially chemicals, electro-metallurgical plants — which occupy an increasing area of the total national production, may surprise an outsider by the incongruously low number of employees. Sometimes in the vast halls of busily vibrating machinery or in acres of outdoor stills and cracking plants there is not a single workman in view. It is natural that the staff of labor aristocracy in such plants should receive every conceivable facility and convenience, the expense remaining just about untraceable in the cost of the finished product. But even the in-between, assembly-type industries as automobiles, aircraft, appliances, furniture tend under economic pressure toward a steady growth of mechanical equipment, with a corresponding decrease in numbers and increase in the status of labor.

It is evident under the circumstances that anything that will make a plant a more desirable choice as a place of work, and anything that will add a per cent or a fraction of one to the efficiency of the men at work will readily justify its cost within a wide margin — not as a paternalistic gesture of good will, but as a cold-blooded business proposition. What are the physical measures that come within this scope?

Perhaps it would be best to start with some that don't. Proposals crop up here and there in architectural magazines concerning recreation grounds at plants, social halls and the like. Experience seems pretty conclusive that workers aren't interested. They want to spend as few hours as possible near their place of work and prefer their recreation elsewhere. Sometimes light lunchtime games like horseshoe-pitching, etc., find some favor, but the insistence of employees to get away as soon as possible led to a steady shrinkage of the lunch period. The original hour was reduced to three-quarters, then half, and is now 20 minutes in many of the mass-production industries, obviously leaving no time for play and creating a paradoxical situation in which management worries about the tendency of employees to neglect their physiological needs, to the disadvantage of efficiency.

Nor does labor like to use meeting places provided by management, no matter how superior they may be to union halls, beer gardens, or school auditoria.

Broadly speaking, three categories of physical provisions may be discerned as factors in employee relations.

The first category is one of which employees are

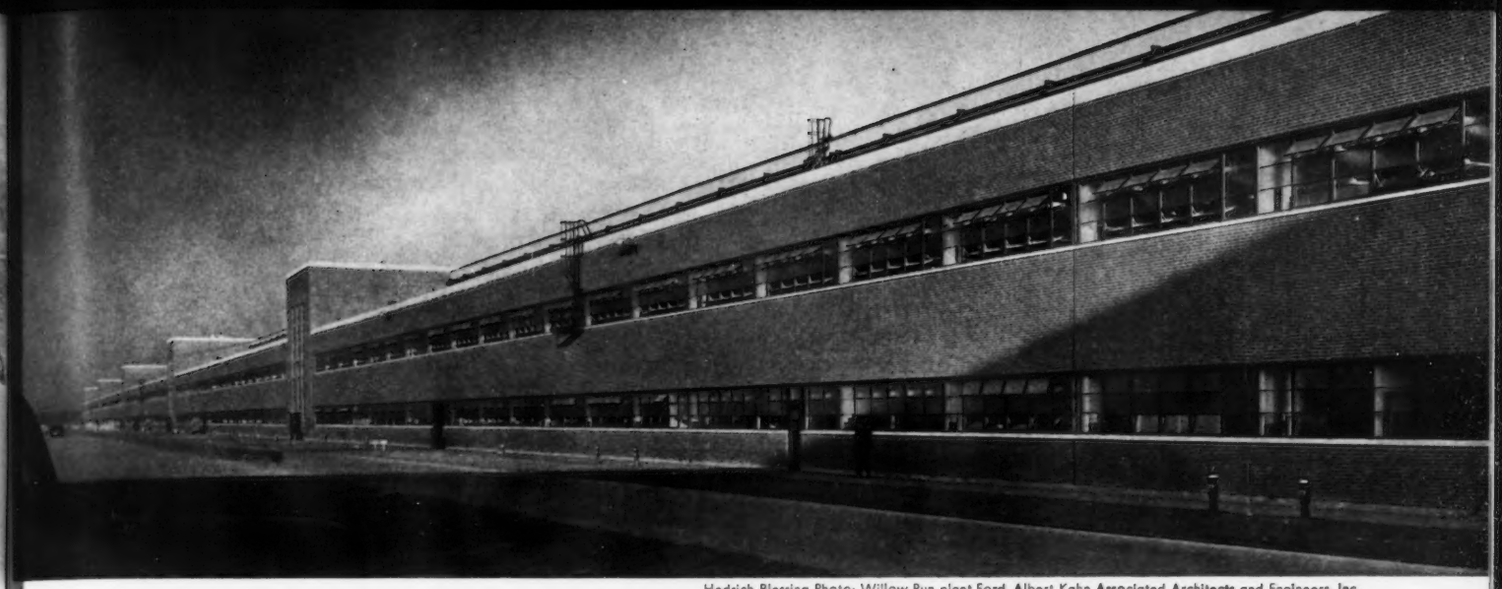

Hedrich-Blessing Photo; Willow Run plant Ford, Albert Kahn Associated Architects and Engineers, Inc.

thoroughly conscious, and on which they are insistent. Involved are mainly saving the employees' own time and items of physical comfort. Ease of access is prominent in this group: adequate parking near the place of work, or rather, near the time clock where pay begins; short walk from parking space or other transportation to the locker room or place of work (and with the general imminence of portal-to-portal pay, employers will no doubt be as concerned with this feature as labor. Good locker rooms, with ample space to handle rush periods, distributed for easy reach from work spaces and from places where employees may eat lunches brought from home and stored in the lockers, are next in line. Sanitary facilities must likewise be close to places of work in the mutual interest of employer and worker; showers are taken for granted for hot or dirty work and often demanded by other workers also, women and younger men being particularly interested in freshening up for social activities after work.

Cafeterias must be close at hand for the shortening lunch period, and must have enough counters to eliminate long waiting lines. This item, too, is of mutual interest to workers and management; the latter, having become aware of the effect of good nutrition upon efficiency, prefers that employees shall make full use of the balanced, hot meals offered, and that they shall not be rushed into gulping their food by loss of time in waiting. Even under ideal conditions, however, many employees prefer to bring their lunches and space must be provided for them, with perhaps partial service (as coffee or ice cream). Women workers are often furnished with a kitchenette adjoining the main rest room, which has gradually blossomed out with cheerful upholstered pieces and fabric curtains, in spite of reports of occasional carelessness or vandalism.

Other less keenly contested items in this first category are daylighting and ventilation. The modern plant must, of course, provide adequate artificial lighting; yet the psychological need for contact with the outside world is attested by the indicator devices used in some blackout plants which keep shut-in workers informed about the weather outdoors. Good ventilation has become a matter of course. And it is conceivable that air conditioning will eventually become a requirement, especially in the hotter climates, having already been installed in many departments as an aid to certain production processes, in office and medical wings attached to plants, as well as in officials' dining rooms and clerical cafeterias from which it tends to spread into general employee cafeterias.

The second category includes features with which employees are not so vocally concerned, but which are important to management from the point of view of safety, efficiency or legal responsibility. In lighting and ventilation plant designers are likely to set their standards much above the point at which workers would become critical. Health and medical departments are geared not only to deal with accidents, but to prevent them by initial and periodic examinations of employees and constant surveillance of the premises. Spread of contagion is minimized by checking the condition of employees returning from sick leave, and many plants install complete diagnostic and treatment facilities, sometimes including dispensaries, to cope with all aspects of service-connected disability. This may be motivated in part by the intent to reduce liability in compensation cases; to a much larger extent it is done to offer the very best service available, in humanity toward the worker, and also to return him more quickly to his post.

Safety is promoted also by training, often with slides, movies or demonstrations, in classrooms equipped for the purpose, which are usually part of an education suite used for orienting new employees and training old ones for advancement. Of recent years, color has been used for calling attention to obstructions and hazards, coding machine parts and controls, etc. In fact, color crashed the factory gates by this means and was then increasingly recognized as an effective ingredient for easing eye-strain, combating nerves and fatigue, and generally putting the worker into a more cheerful, therefore more efficient, mood. The same concept was extended to other aspects of environment and was instrumental in such architectural improvements as the substitution of clean

rolled shapes for confused trusswork, or at least relegation of trusses to inconspicuous upper reaches of roofs and monitors; disciplining of rampant pipes, tubes, conduits; adoption of wide clear bays even where not required by the process; acoustic treatment of noisy rooms; and wiring for musical and other programs. It is doubtful whether labor takes much conscious notice of such matters, although controversies over color schemes have been reported as oddities; nevertheless, the added dignity and livability of the places of work cannot help but become a favorable factor in labor relations. Employees will occasionally remark upon the attractiveness or comforts of a plant — when safely out of hearing of anyone connected with its management.

Beyond these two categories lies a third type of attack upon the problem of labor relations, along with public relations in general: to evoke in employees a feeling of pride and personal attachment toward the plant, and by the same token, attract desirable jobseekers and impress the general public. As in all other phases of labor and public relations, design can offer important contributions.

Early New England manufacturers must have taken a good deal of pride in their plants, judging by the careful disposition and attractive lines of their many-windowed, tower-topped buildings. In a later, perhaps more competitive era, plants were apparently regarded as unavoidable encumbrances, without character or dignity of their own and hardly even kept clean like other tools of production. The swing toward the contemporary gleaming structure coincided with the growing independence of labor and with the critical attention of the general public, which frequently found legislative expression.

". . . must start from a new level of bright, spacious, efficient civilization that is vastly ahead of the domestic surroundings of employees." (The Austin Company, engineers and builders)

One of the more recent devices in bidding for public favor is the opening of plants for public inspection, often including regular guided tours, to show attractive working conditions, efficient production and painstaking devotion to the excellence of the product. Of course, this device can be used only where the plants are already bright and up-to-snuff; in turn, the institutionalization of public inspection serves as an incentive for further improvements of plant design and housekeeping.

The physical features which will evoke pride in employees and approval in the public begin with the very location of the plant, often in open, green country. Site planning for impressive views and landscaping to emphasize or hide parts of the layout follow with their contributions. Treatment of fences, drives, parking spaces and architectural appearance complete the exterior effect.

In the interior layout, the public relations program will require an impressive reception room, matched from the labor relations point of view by an employee entrance which should be just as bright and dignified and perhaps just a little bit luxurious. Both spaces usually carry a display of company products, often accompanied by highly informative material on the place and contributions of the industry in the national picture.

For the visitors, the reception room should be the starting point of a tour designed to convey a cohesive impression of operations, and emphasizing the best points of employee facilities. The tour should be designed into the plan at the start, since it is essential to avoid interference with plant traffic, distraction of employees at work, or exposure of visitors to hazards.

For employees, a parallel program of orientation is often included in training courses, intended not only to stimulate their pride in the company but also to inform them of the opportunities to find the work most congenial to them and for advancement. This requires classrooms or small auditoria, already mentioned in connection with safety education.

In addition, many industries maintain showrooms and sales suites for distributors and dealers; some, like the automobile and clothing industries, sometimes devote extensive floor space to retail sales as a matter of public relations — catering to a widespread consumer preference to shop at the very source.

In conclusion, it might be said on the basis of some experience, that the architect is exceptionally well qualified to advise the industrialist on matters within the scope of this article. Because he is a member of the consuming public himself and deals professionally with clients drawn from so many walks of life, his notions on how people react to features of plant layout and building design are often more dependable than those of the plant management or even those of single-minded labor or public relations advisors.

CURRENT DANGER IN PENNY-WISE SAVINGS

By E. Warren Bowden, Vice-President of Walter Kidde Constructors, Inc.

BUILDING costs of industrial structures are now 40 to 45 per cent higher than they were in 1940, and, according to some authorities, will skyrocket to 55 or 60 per cent by 1947.

Quotations for materials vary from day to day and are subject to change without notice. Almost all subcontractors are automatically stamping an escalator provision on their quotations which states "we will quote you such and such a price today, but you will have to pay that price plus whatever the changes in labor and material may be from prices in effect now."

But in spite of the high cost and in spite of the difficult and complex problems involved in building today, the volume of new construction will likely reach seven billion dollars in 1946 and twelve billion dollars in 1947. Certainly, there must be some excellent reasons for a manufacturer to build under these conditions. Actually, the present and prospective high cost of wages for production, coupled with the low cost of money, amply justifies the progressive manufacturer in providing efficient quarters for his operation.

When it is considered how small an amount, relatively, is represented by the annual charge for the plant building as compared with the annual cost of wages, it becomes apparent that any reasonable expenditure that will cause an increase in efficiency of labor, will result in an overall benefit to the business.

Efficiency in production is governed by a large number of things, and admittedly the most important single factor in increased efficiency is the introduction of more modern mechanical equipment used in the manufacturing process. However, the cost of labor to produce a given product is affected very materially by conditions that exist in the plant itself. For example — in many plants the limitations imposed by an obsolescent design require that the materials in process be carried back and forth without the benefit of mechanical conveyors, and over routes which in a properly laid out plant could be reduced to a fraction of the present travel. If the existing multiple-story plant with limited areas, closely spaced columns and numerous bottlenecks, could be replaced by a properly designed modern plant, a markedly increased efficiency would result. Employee attitude is also an important factor in the amount of work produced, and it is commonly recognized that improper lighting, poor ventilation and the absence of adequate employee facilities may have a very retarding effect on the total output of the finished product.

Of course there is no average plant condition that will be really representative for all industries, and the relationship between wages paid and the cost of the investment in plant varies widely. However, from the experience of construction engineers in what might be called the average type of plant now being designed and built, it appears reasonable to state that the annual charge for interest, amortization and real estate taxes on the plant itself, without manufacturing equipment, amounts to only about one-tenth (1/10th) or less of the sum paid annually for wages of employees in that plant. As an example, one plant in which the investment was about $400,000 employs a minimum of 400 wage earners, at about $1200 each, making a total annual payroll of $480,000. On a 20-year basis the cost of interest and amortization to pay off the full cost of the plant is about $30,000, and taxes on the real estate amounts to an additional $10,000 making a total of $40,000.

If, by building the new plant the owner were able to decrease his labor requirements by as much as eight and one-half (8½) per cent, he would be able to justify it.

There are a number of such instances where studies have indicated that the proposed new plant will pay its complete annual cost in terms of wages saved. One instance of this is a company now renting several loft areas in the New York district, where it is necessary to move semi-finished items from one location to another by truck. The savings effected by eliminating these trucking charges will alone more than pay the annual carrying charge on the new plant. The latter will combine in efficient manner all of the scattered operations.

The wisdom of investment in efficient plant facilities becomes more and more apparent as the compensation paid to wage earners is increased. The relative annual cost of carrying the new building as compared to the greater total now paid for wages not only amply justifies the new building, but indicates very clearly that it is unwise to cut corners and effect minor savings in plant construction which may have an adverse effect on the total plant production.

New plant for Continental Can Co., Utica, N. Y. Walter Kidde Constructors, Inc.

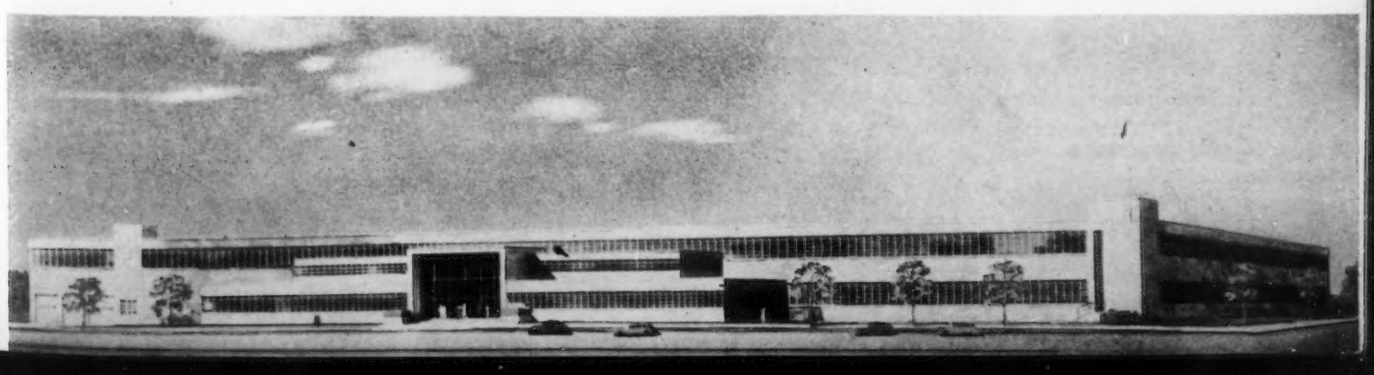

TRENDS IN INDUSTRIAL PLANT DESIGN

By George H. Miehls

President, Albert Kahn Associated Architects and Engineers, Inc.

1. *Influence of personnel relations on building design*
2. *New materials for construction*
3. *Changes in structural design*
4. *Influence of production layouts on building design*
5. *Roofs and walls*
6. *Column spacing*
7. *Heating and ventilating*
8. *Air conditioning*
9. *Windowless vs. daylight construction*
10. *Interior painting — use of color*
11. *Eating facilities*
12. *Sanitary facilities — washrooms, toilets, lockers, showers*
13. *Recreation facilities*
14. *Outdoor facilities*
15. *Parking facilities*
16. *Landscaping*
17. *Acoustics*

Hedrich-Blessing Photos

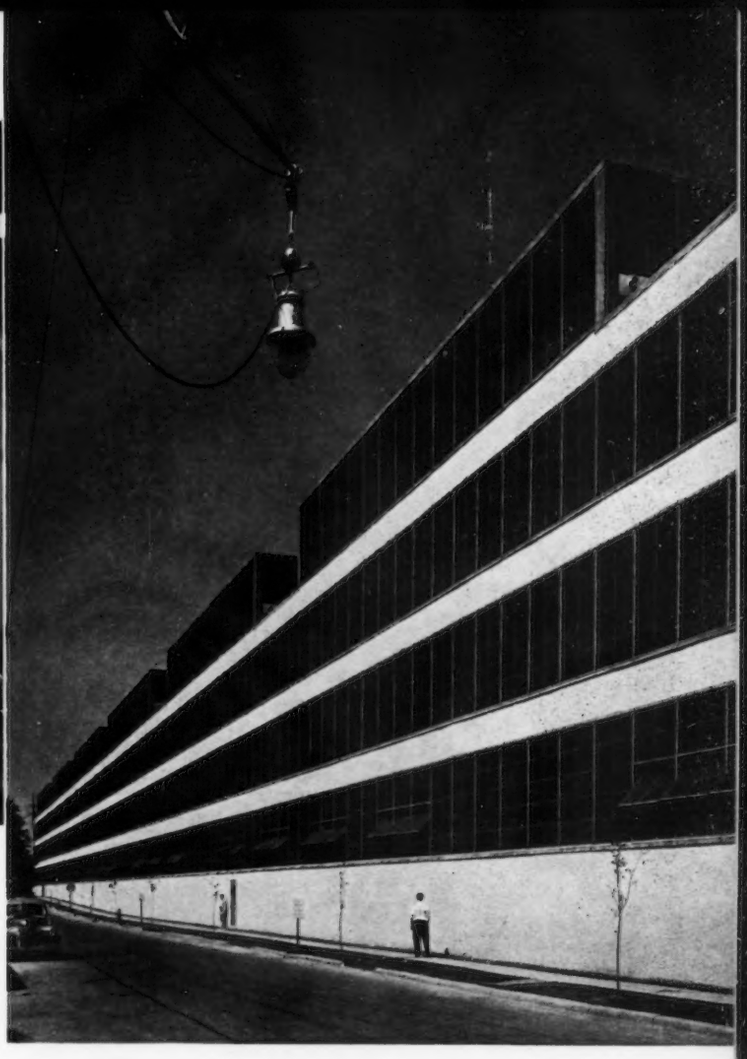

". . . in an imposing flow of horizontal lines of dignity, proportion and sheer beauty. If the promise implied by an attractive exterior appearance is realized equally by interior appointments, the labor force is likely to be productive . . ."

Out of our broad experience in wartime construction have come relatively few new materials. There has, however, been much refinement of our thinking. Trends not always clearly defined before the war stand out in sharper relief today. They have to do less with the physical aspects of construction than with what might be called its sociological phases.

Two, among others, that take a pronounced form and definite direction are these:

1. Urgency for designing into a building every possible aid — whether of beauty, utility or facility — to realize the utmost in labor productivity;

2. Attractiveness of smaller population centers as plant sites because of cheaper land, better expansion facilities and more stable labor. In other words, a trend from huge, completely integrated in-city projects to smaller production units employing from 1000 to 3000 people.

1. Influence of Personnel Relations on Building Design: This factor has become of accelerating importance in the past decade, and is now more important than ever, with the end not in sight. It is born of the realization that other factors being equal, the best looking plant in the community will attract, and hold, the highest type of labor. Proper plant appearance and facilities instill pride in workmanship, and build community stature and prestige for the workmen. Adequate employee facilities properly spaced, and arranged according to the sequence of need, lift morale and productivity and cut costly disruptions to production.

Time was when management concern for workers was regarded as paternalistic. It was resented, and there appears a distinct borderline beyond which it may not venture today, of which more later. But while the man is at work in the plant, or injured while at work, or viewing the plant objectively as a member of the community, he is susceptible to every blandishment of management to make him a prouder, happier, more productive workman.

This begins with his first view of the plant on his way to work. If it affords a true concept of American industrial architecture at its very finest, it will interpret the masses required for industrial utility in an imposing flow of horizontal lines of dignity, proportion and sheer beauty. If the promise implied by an attractive exterior appearance is realized in equal measure by interior appointments, the plant labor force is likely to be productive and a community asset. Because most of the factors relating to this subject are broken down further along, they will be dealt with in detail later.

2. New Materials for Construction: Any architect or builder would answer this question by stating his willingness to forego his claim to any new materials if he could only get all the old ones he wants for the next year or two.

Of the new materials, there are few with which we were not familiar before the war. They may be a little further along now, and some are being offered that were only in the prospectus stage before the war. But such materials are in finishes; not structural. We have made very little use of laminated beams and girders.

Aluminum will be more and more used in sash, insulated wall panels, etc. Welding of metal to plywood has been improved. But improvements for the most part have been minor and for the next year or more, or until postwar research and development have had a chance to function, interest will be more on the scarcity of standard materials than on the introduction of new ones.

3. Changes in Structural Design: There is little change indicated here and renewed emphasis is on flexibility. This was vividly illustrated during the war. Of numerous aircraft projects which we designed around the time of Pearl Harbor, every single one was at least doubled in capacity, and some tripled and quadrupled, before the end of the war. This expansion had to be superimposed on existing production so that there would be no interruption in the flow of weapons while plant additions were being made.

This would not have been possible, at least not in the time available, had not original plans provided for just such a contingency. While the likelihood is remote that any similar quick expansion of production facilities will be required for civilian output in the near future, it is a fact that the plant designed for easy flexibility will be best able to take advantage of quick shifts in the market for its product.

To build a project with the expectation that its capacity may be doubled or trebled within the life of the original plant presupposes extensive land holdings for room to expand physical facilities and related services such as parking. This land is obviously cheaper in a small town than a large city. Because of machine technology and job simplification, less average skills are required in industry today than ever before, and industry accordingly need be less concerned with locating in an area of skilled labor reserves. A small community with relatively little industry and a labor reserve of 1000 up to 3000 men can offer an attractive picture to at least certain types of industry. For industry to locate in such a town in turn attracts new people, builds up the community and automatically provides new labor as the expanding needs of the plant require it.

When a plant employing 3000 men goes into a new community with the expectation of doubling or trebling its capacity, it can eventually wind up with total payrolls of not more than 9000 people and thus escape some of the transportation bottlenecks, straining of employee facilities and other non-production burdens which are inevitable in huge concentrations of industrial workers.

4. Influence of Production Layouts on Building Design: The influence here is less than might be expected, assuming a one-story, or one-story and mezzanine type of structure. Here the raw material comes in at one end, moves through the production processes and out at the other end in a continuous line which is so laid out that no part of production crosses another, and material, sub-assemblies and parts will meet the line at the proper place at the proper time. Industries utilizing this principle to the greatest extent make changes in product models semi-annually or annually and the building design must be sufficiently flexible to allow for these changes in production layouts without major building alteration or change.

5. Roofs and Walls: There arises the time honored argument for monitor type construction versus the monitor-

"It seems improbable that we will ever eliminate monitors. Certain operations definitely require the light and ventilation. . . . But studies of the effect of lighting on productivity have resulted in more attention to lighting the individual job"

less type. Many new plants are being designed without monitors; many are designed with monitors. The final decision rests with questions of economy of first cost and operation, psychological effect upon employees, the nature of the processes and many other factors which must be evaluated in each individual case. Studies in lighting have cast doubt on the adequacy of daylight for some processes where it was generally accepted before. Since the question of monitors is largely related to lighting costs, the subject will be examined under lighting.

Roof decks still are of the usual standard items. One company has placed on the market a special metal deck which is zinc coated, "bonderized" and aluminum coated for long life without painting.

The question of roof insulation assumes large proportions and importance. The selection of insulating materials is being constantly broadened, ranging from vegetable fiber boards through fiber glass to cork and foam glass. Cost of insulation must be evaluated in relation to first cost of heating installation and the annual operating cost. Care must be taken to maintain the insulation in a dry state to assure that its properties are not impaired by moisture — it being recognized that some insulation mediums are more affected by vapor pressure than others. To obtain the best results from insulating media, and a proper return on the initial investment, each material must be evaluated on its heat transmission value, the cost of maintaining that heat transmission value, and its first cost.

6. Column Spacing: There is little foreseeable change here. The ideal, of course, is no columns at all. But the industrial architect must always compromise the ideal with cost factors. We of necessity went to 76-ft. bays in some war projects, but for all-around utility, flexibility and economy in a one-story layout, we preferably stick to the 40 by 40 or 40 by 60-ft. bay as a representative layout for economy and flexibility.

7. Heating and Ventilating; 8. Air Conditioning; 9. Windowless vs. Daylight Construction: Since these subjects are all inter-related, they will be discussed together. It is also necessary to weigh them together because the saving effected by a given procedure in one of the three factors may be offset by negative in the other two. For example, to install a flat roof instead of monitors will effect a material saving in first cost of construction. But provision for ventilation and lighting to make up for that lost through lack of monitors may completely neutralize the saving. Every project must be weighed from the overall cost standpoint.

It seems improbable that we will ever eliminate monitors. Certain operations such as foundries and forge hammers definitely require the light and ventilation they provide.

But in general manufacturing areas, studies of the effect of lighting on productivity have resulted in more attention being given to lighting the individual job than the general area. On jobs requiring a high degree of lighting, or constant light, daylight must be supplemented. When artificial lighting is provided, experience has shown that it will be largely used even though not needed. If a drifting cloud shuts out natural daylight even momentarily, the artificial lights are immediately turned on, and once on are not turned off regardless of the adequacy of natural daylight a few seconds later.

Since the current, maintenance and installation costs of artificial lighting are thus a part of the project, it seems needless to burden it with the additional cost of monitors. Monitors were adequate when 20 footcandles were considered sufficient for general factory lighting. But today some processes require up to 50 footcandles, and 35 to 40 footcandles are regarded as the minimum for a general manufacturing area.

Without monitors, expanse of window sash is materially reduced and brings up the question, "Why windows at all?" We do not believe the ultimate will ever be reached because day workers want to see outside. In wartime blackout projects, workers scraped peepholes through the paint, and we had reports of their throwing wrenches through the opaqued windows to get a look at the weather outside. Hence, while window sash may be further curtailed, we believe it vital to provide at least a vision band of sash in the sidewalls at the eye level.

Without monitors, provision for supplementary ventilation must be made, and it is important to see that exhausted air is balanced by an equal supply of fresh air to avoid a partial vacuum within the work area.

While air conditioning is going increasingly into offices, we do not look for it in factory areas for some time unless temperature and humidity control are vital to the production process. Again it is a question of cost weighed against productive results, and the economic scales are not yet tipped in favor of the installation.

The other related factor of heating brings up the intriguing new subject of radiant heat. Our experience with it to date indicates that it may have a wide accept-

"Here the raw material comes in at one end, moves through the production processes and out at the other end in a continuous line . . . no part of production crosses another, and material, sub-assemblies and parts will meet at the proper place and time"

ance in a variety of industrial building applications.

It seems particularly suited to heating high areas where comfortable working temperatures are required at the floor level, such as airport hangars. The heating coils imbedded in the concrete floor radiate heat upward to the working areas, and mechanics and others at or near the floor level are not affected by the loss of heat in the higher areas occasioned by the frequent opening and closing of the hangar doors. Loss of heat may also be reduced by throwing a curtain of hot air across the exposed area when the doors are opened.

We have recently completed an installation of radiant heating in a general office building and are watching results.

10. Interior Painting — Color: Experts now giving intensive study to this subject promise conclusions which may necessitate a revision of our thinking. Until the past year we felt that the lighter colors, such as buff instead of machinery gray, with a higher reflectance value, would improve lighting, ease eye strain and consequently lift worker morale. Some plant owners even tried painting floors white, but, like the white line in the middle of the highway, they did not last very long. It now appears that light colors are less effective than blending colors. There is a natural affinity of certain hues and tints, and a natural clash between others. If research bears out the point, the problem will be to arrange a natural sequence of blending color, from work bench, to machine, to surrounding walls for eye-ease and clashless sight.

11. Eating Facilities: This is such a tremendous factor in employee morale that it is a specialized study in itself. In many war plants, surrounded by trailer camps and similar temporary housing facilities, workers ate all their meals in the plant, and the opportunity here for improving worker morale and health by proper feeding in attractive surroundings is obvious. It is equally obvious that because of the importance of the food factor, not only on morale but on productivity, management will feed its workers better on the job than they eat at home.

Out of the whole broad subject, several generalities may be made: Separate facilities should be provided for office and factory workers, because a bench hand in dirty clothes does not want to soil the dress of a stenographer any more than she wants it soiled; while lunch wagons clutter up plant housekeeping, they frequently provide a worker with his only breakfast and to discontinue them will lower productivity; tables seating four will feed more people on given floor space than benches.

"It is equally obvious that because of the importance of the food factor, not only on morale but also on productivity, management will feed its workers better on the job than they eat at home"

It is important that ample facilities be provided, so that workers may be served in the shortest possible time, minimizing waiting time — and allowing thereby a more leisurely eating period. Each operation presents a different problem, but the solution has a material effect on employer-employee relations and productivity.

12. Sanitary Facilities: Here again the effect on morale and productivity is great, and can be demonstrated concretely in the instance of toilets. Assume that they are inadequately spaced so that workers must walk more than 200 ft. Aside from the fatigue factor, they will waste a minute or more a day, which in a plant of 2400 men means a minimum of 40 hours daily of production time paid for but not realized.

We favor wherever feasible bringing the men into the plant at the basement level and locating all facilities there, such as lockers, washrooms, toilets, showers (which experience shows will be seldom used except in foundries), time clocks and similar facilities. Where bedrock or other conditions rule out the basement, the mezzanine is second choice.

The reason for preferring the basement over the mezzanine is that stairs are generally fewer and supervision generally is better. Toilets, however, are now generally being located on the mezzanine for even closer supervision than is possible at the basement level during the working shift.

Either arrangement will keep the production floor clear, a desirable factor in housekeeping, but much more important in achieving the flexibility so necessary on the production floor when layouts need to be changed to accommodate new models or processes.

Employment and personnel offices, plant hospital or first aid, and similar services may also be located in the basement, although frequently it is advisable to house them in a separate building in order to divorce job applicant flow from employee traffic.

Plant hospitals follow a widely varying pattern. Some war plants had facilities almost equal to a small general hospital, which seems far beyond the need or economic reach of private capital. For the most part, the facilities required to give job applicants physical examinations should be nearly ample for the in-plant treatment of workers, where the community provides general hospital service.

13. Recreation Facilities; 14. Outdoor Facilities: On one war project, we were asked to lay out baseball diamonds; on another, recreation rooms; on still another, a dance floor complete with orchestra where workers could dance during the lunch period.

All this was well enough while sponsored — and paid for — by Uncle Sam, who was not concerned with com-

petitive costs and against whom there was no paternalistic resentment. But we question whether average workers would take the same attitude toward private management. We do not believe such facilities would be sufficiently patronized to justify the cost. Average workers want to do their job in the shortest possible day, and get away from it as quickly and completely as possible for the rest of the day.

Consider the attitude toward showers, for example. We have been asked to include them on projects where their need or utility was debatable. Our experience has been that where the work is only moderately dirty, in contrast to foundries where showers are essential, very few workers ever stop to take a shower at the end of their shift. They want to get home immediately, take a shower there, and get into clean clothes.

We do not believe they would be any more disposed to use plant recreational facilities, either indoors or outdoors, unless the plant was remote from any community recreation. In such extreme instances, it would certainly be desirable and almost obligatory on management to provide such facilities.

But for a plant in a built-up community to attempt to provide bowling alleys and recreation rooms for its workers would almost certainly run against the paternalistic resentment of labor and of competing private enterprise.

While we know of no instance where theater operators have protested the in-plant running of movies during the lunch hour, there is always that possibility if such programs are allowed to get too elaborate or switch from educational themes to entertainment. Many plant cafeterias are now equipped with projectors and screens. There is no question of the relaxation value of short films, although the noise factor is generally a neutralizing element.

15. Parking: Workers realize that if they live remote from the plant, it is their responsibility and the time spent in transit is their own loss. But from the time they turn into the plant parking lot until they punch the time clock, they blame any undue delay on management, and rightly so. Similarly at the end of the shift, any interruption between punching out and getting on the open road on the way home they resent as time stolen from them and their families.

We are constantly striving to cut this lost time interval. Flanking arterial highways should be adequate to carry the sum total of cars on the two largest shifts, which will be the plant traffic peak. Generally one-way movement through the lot is best, with entrances and exits on separate highways.

The ideal arrangement would permit the worker to drive into the lot, park, and proceed on foot on weatherproof surfaces into the plant as quickly as though he were the only patron of the lot. Walking distances should be as short as possible, and for this reason two or more small lots contiguous to the plant and opening into it are preferable to one large lot. Any trafficways between lot and plant should have pedestrian over- or underpasses for quick and safe passage.

Workers who use public transportation should have sheltered waiting rooms connecting, if possible, directly with the plant. Provision for public bus parking or streetcar turning, in the most convenient arrangement for employees, should be an integral part of the scheme.

16. Landscaping: There is no question of the public and labor relations value of a beautiful plant in an attractive setting. If the location is remote from the city, much can be done in the original plans to heighten the beauty of the project. But wherever it is, the maintenance cost of preserving the attractiveness of lawn, shrubbery and trees runs high. Landscaping is purely a question of the willingness of the owner to spend money for an intangible asset.

17. Acoustics: One subject not yet covered is study of noise reduction in the plant. Since the acoustic factor is always considered in the general office plan, it would seem equally desirable to consider it for the work area. Some progress has been made in using perforated cylinders to pick up sound and lower the noise level. There is thinking along the lines of treating the individual machine rather than the general area. This grew out of experiments in a machine shop where it was virtually impossible to hear over the intra-plant telephone. By partially enclosing it in a "booth" consisting of a 3-sided box of perforated acoustic material, reception was good beyond expectations. Sound engineers reason that a similar booth fitted around three sides of a machine, where it will not interfere with the production operation, should work equally well in arresting noise before it reaches the general area. The ultimate objective, like the many phases of employee relations already mentioned, is to eliminate noise as a negative factor in working conditions, for improved morale and productivity.

Apart from the items here covered, we feel that the greatest single influence on factory design and construction at least for the next year will be availability of materials. The situation appears to be getting worse rather than better, with no complete relief in sight until the balancing forces of supply and demand again flow freely in our economy.

"Plant hospitals follow a widely varying pattern. Some war plants had facilities equal to those of a small general hospital, which seems far beyond the need or economic reach of private capital"

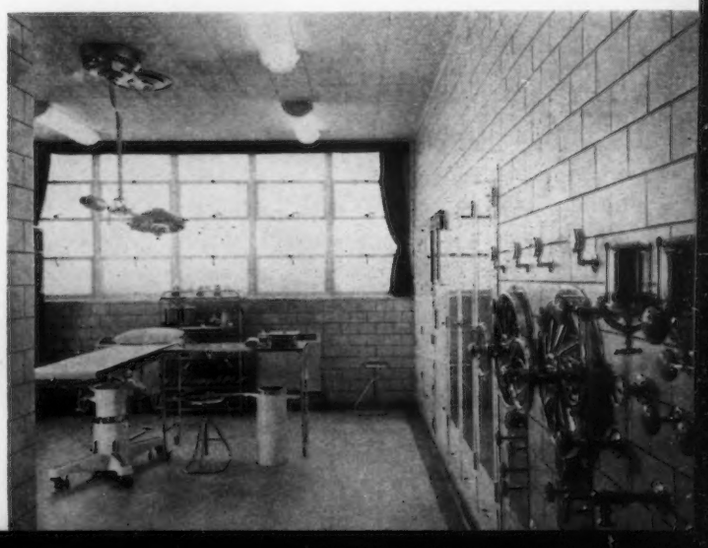

Hedrich-Blessing Photos

A MEASURE OF MODERN EFFICIENCY

Plant for American Paper Goods Company, Chicago

The Austin Company, Engineers and Builders

WHEN this client faced the question of carrying out a new building project or enlarging its old quarters, a little figuring soon showed the wisdom of going ahead with the new plant. Although the proposed building would contain less that 20 per cent more area than the old, it would permit a 100 per cent increase in employment, and a 250 per cent increase in production.

Comparative figures tell part of the story:

	Old	*New*
Gross square feet	102,000	120,000
Net square feet	84,000	119,000
Waste square feet	18,000	1,000

Usability of the space is still more telling. Aside from the waste space in stairs and elevators, there were columns 2½ ft. in diameter and spaced 14 ft. apart. The new building has 8-in. steel columns, with spans of 30 to 40 ft. And the clear space is arranged for straight-line production with the newest factory equipment.

In the face of such a comparison there could remain no question of trying to salvage the old building. Costs of new construction would have to be higher than they were, or are, to deter a client from building. In a time of increasing labor costs, such production efficiency increases in value out of all proportion to rising construction costs; thus economics actually favor construction of any facility that will make any contribution to production efficiency.

The client here was conscious of employee matters in other respects as well. For example, original plans called for employees' entrances in the conventional rear or side locations; at the client's request the entrances were moved to the front, so that "all should enter the building by the front door, the same as they do at home."

Employees have responded interestingly to the new, well-lighted, attractive interiors — "white collar" workers have been applying for factory jobs. "Factory pay is higher than what they can get in office jobs, and the

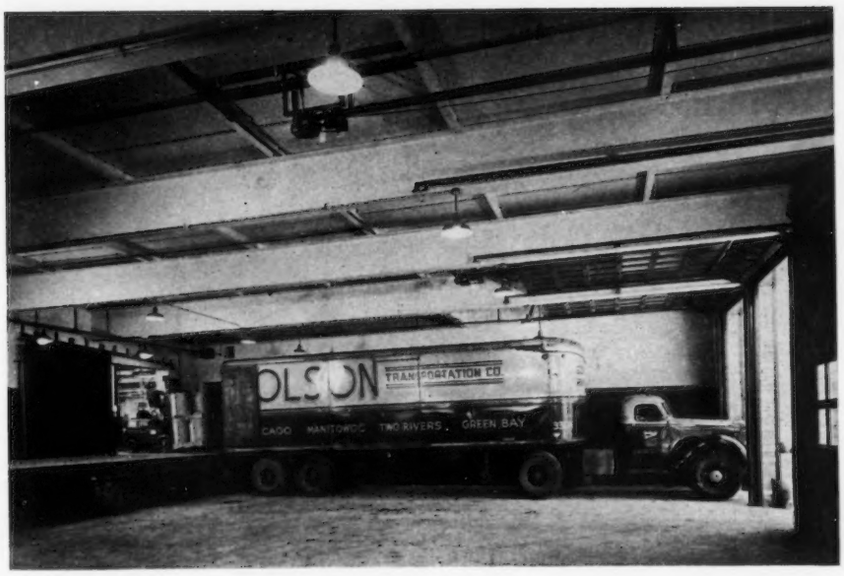

Built to accommodate the large trucks that bring paper supplies down from Wisconsin, the truck court has outside and inside doors, to protect paper during wet weather. Vents in platform for the exhaust gases

Square feet being translated into cubic feet. High ceiling heights and clear aisles permit use of fork-type lift trucks to stack loaded skids. Still more important than the space saving is the economy in time

The finished product goes out just as easily as the raw materials come in. This is not the same loading platform as shown above; this one is at the other end of the plant, to keep truck traffic to a minimum

Sound-treated ceiling and recessed fluorescent lighting of 35 footcandles, plus air conditioning, make for comfortable working conditions in the office portion. Sprinkler pipes are concealed in ceiling

Democracy in the factory is carried further in the women's lunch room: office and factory workers eat together. In this small plant there is no cafeteria, but the company provides free coffee for the girls

Selecting a site next to the county forest preserve, the company was not unmindful of recreational possibilities. The baseball games, a daily lunch-time activity, are entirely on the initiative of the workers

factory working conditions are so clean and desirable that they meet the standards set by white-collar people."

A similar trimness in exterior design has had two effects. Besides contributing to the dignity of employment, it has removed some earlier apprehension in the neighborhood about having a factory located there. The site is an outlying plot between a residential district and the county forest preserves, where, incidentally, employees gather for pick-up ball games in the noon hour. Employee approval of the site was noted in the fact that, even though it was several miles from the downtown location, 85 per cent of the workers kept their jobs.

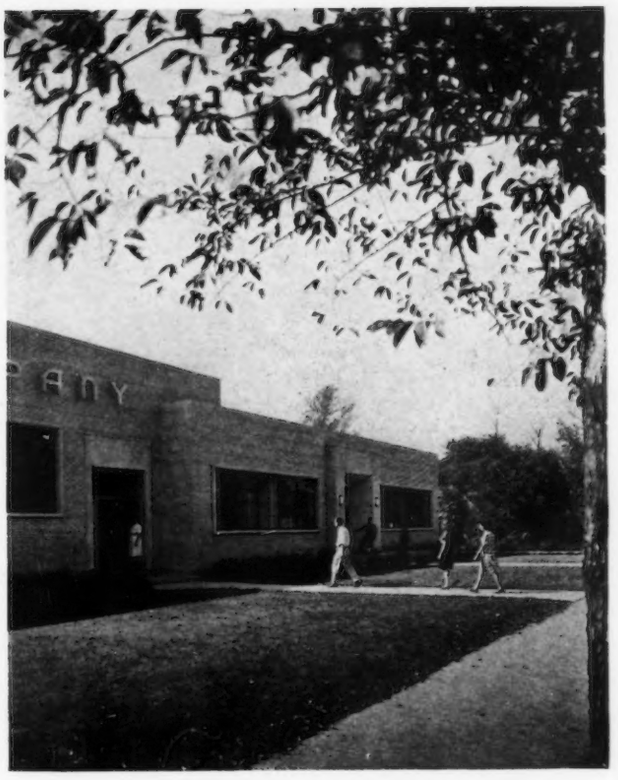

Right: it was not by accident that the employee entrances were placed at the front. Office portion in the background has its own entrance. Below: the orderly row of printing presses, with the wide aisle for skid-truck paper handling, is a good illustration of the advantages of the wide column spacing in the modern plant

DESIGNING THE SMALL INDUSTRIAL PLANT

By John Cromelin

Architect, Clearing Industrial District, Inc., Chicago

On a sunny Sunday afternoon in Chicago it is not unusual to see an automobile cruise slowly past one of our Clearing factories, and perhaps come to a stop. It will be a factory worker showing his family "the nice place that our company has."

If it gives an architect some smug satisfaction to see a worker thus proud of his "place," and I assure you it does, we feel that our clients, the manufacturers, can realize their satisfaction in more tangible terms.

To the plant management it means that here is a satisfied worker, a good "company man." His pride is a plus value beyond all of the solid economics of plant location, layout and equipment. It is, of course, a plus value in better workmanship and increased production. Now to a large extent such a worker is probably born that way — he is naturally one who responds to efficient, pleasant working conditions. However important it is for the factory building to bring out this response, we feel that the most important thing a good factory building does is to attract that sort of employee in the first place. In short, the best buildings bring the best workers.

That is as good a place as any to start a discussion of the postwar small industrial building, for if there is any evident trend toward better design it shows itself first in a greater appreciation of those elements that improve the welfare of the worker, and increase his interest in his workshop. Perhaps the only thing that is new is the degree to which this appeal is effective. In the word, "appeal," I am thinking of the task of the designer in working for the manufacturer-client, and I am thinking most especially of our own job here at the Clearing Industrial District in attracting new industries to our industrial subdivisions. We are now building quite a few new small industrial plants, and planning still more, and I am sure that management generally will need all of the plus values that the designer can give him, in order to keep its plants profitable in the years ahead.

Right at the beginning I should say that I don't think there will be any sweeping, revolutionary changes in industrial buildings. There will be, as always, a fairly steady flow of new materials and new ideas, perhaps at an accelerated rate, and it seems likely that we may expect a readier acceptance of obvious improvements. But we shall certainly not depart from the basic laws of economics, the primary needs of space, transportation, efficient process layouts, economical materials handling, and so on. These will remain the all-important considerations in the design of industrial buildings.

At any rate, here at Clearing we don't see any reasons for departing from the basic ideas of plant layout that we have developed in building some 150 small plants over a long period of years. While there is a wide variety of plants in our industrial subdivisions, and improvements are always developing, there are certain features common to nearly all of them. And these features do come together to form a sort of standard pattern for a small factory building.

In the design of a new plant, there are rather compelling reasons for starting from a standard pattern. The modern industrial building, like the modern office building, is a comparatively recent development; so recent that it is difficult to predict the useful life of either. Plants built today, if given proper maintenance, may still be in use forty or fifty years from now. An industry may well outgrow its premises long before that. Or changes in manufacturing technique may render a particular building obsolete for a particular industry.

Factory managers know that once a plant becomes in-

Hedrich-Blessing Photos

This plant shows several evidences of the standardization approach — the clean office portion, the high bay, the sawtooth. Not typical is the cantilevered truss. Vern E. Alden, consulting engineer

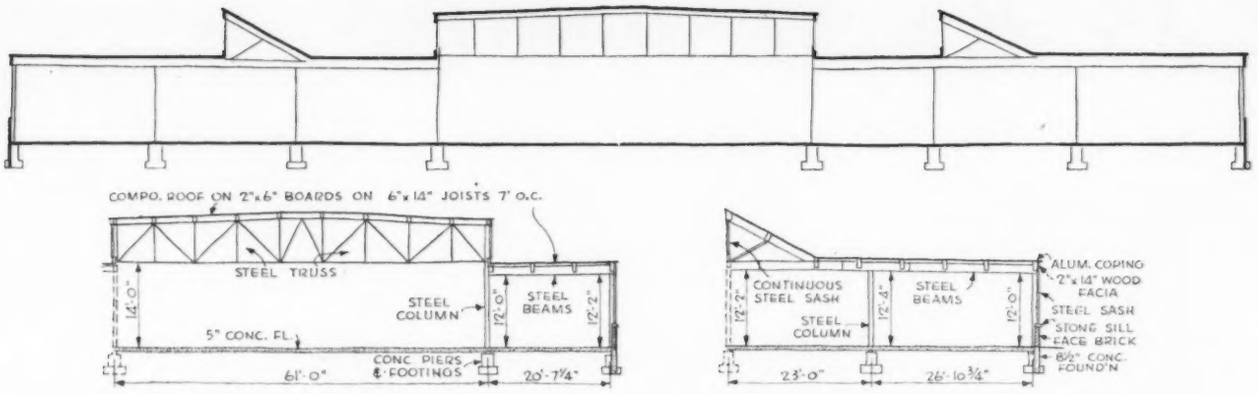

Standard bay units which Cromelin uses as base points for a new client. Since these units, assembled as in the upper diagram, would serve many industries, an effort is made to keep the new design close to the pattern, as a safeguard against obsolescence

efficient for its special operations, it is cheaper to scrap the building and start over than to continue trying to operate in it. If this well known truth seems to suggest just the opposite of *standardization*, it certainly suggests also considerable study of design factors that make for *flexibility of use.*

Flexibility is, then, the first objective of the designer. Suppose that it is not possible to avoid obsolescence for the one business; it may still be possible to come close enough to a standard pattern so that the building will be perfectly good for many other industries. I submit that this is an excellent approach to the problem of obsolescence: the manufacturer can sell the building and thus have comparatively little to write off when he has outgrown the plant, or when his changing needs make it obsolete for his own purpose.

Here at Clearing we have our especial reason for this approach. The Clearing Company develops industrial districts, and builds factories for lease or sale. It has a going, growing group of industries, and it doesn't want abandoned plants or plants of limited utility. More important to the company as a landlord is the fact that it has been able to avoid them. There have frequently been changes in use. There have been rapid expansions, failures, process changes and many other reasons for the turnover of a particular plant, but rarely has there been any difficulty about it.

The little section drawings with this article illustrate some important things in the standard pattern to which we work. They show two units of high and low factory bays, which can be put together in various combinations in the same building, as for example in the diagrammatic section.

Most industries like to have one fairly wide bay with a high ceiling, a sort of nave in the center of the building. This space might, for example, be the final assembly line, or what corresponds to it in the smaller plant. Even if the particular industry did not require this high bay, it would be good to put it in. With a standard, inexpensive truss such as is shown, this high bay would cost only about 3 per cent more than the same space with lower ceiling. Certainly a small premium for increased flexibility.

Then lower bays, perhaps with shorter spans, can be

Another of the newer Clearing plants, this one for Mead Specialties Co. The high lobby next to the main entrance is for display of an ice-boat. Not typical are wood purlins and poured gypsum roof

added along the side as desired. Some could well have the saw-tooth device for skylighting. And these standard units can be added easily, side by side, as the plant tends to expand.

Experience indicates that 30 per cent of high-bay space is a good average for the typical small industry. And any building over 30,000 sq. ft. should incorporate the high space. The monitors run east and west, instead of north and south, to avoid the glare of the late afternoon sun.

The column space of 61 ft. across this high bay is not too expensive and is adequate for a wide variety of industries. Column spacing in the other direction might be 24 ft., and, of course, the length of the building could be anything. Column spacings in the low-ceiling areas are not usually too important; they run in our buildings from 20 to 30 ft.

Planning for expansion is, of course, another standard item. Almost all industries do expand; land is cheap compared with buildings; and avoiding obsolescence by providing room to expand is an obvious and simple precaution.

As a matter of policy, we try to avoid multi-story construction. About 80 per cent of the industries in the various Clearing districts have come from multi-story buildings, and none of them wants to return to them. The development of mechanical handling systems has made it possible for such industries as paint, cosmetics, etc., to function perfectly well in a monitor type building, with lower first cost and increased flexibility.

Another general requirement is transportation. Not all small plants require switch tracks. About 75 per cent of the factories in our group have them, and the other 25 per cent are arranged so that tracks can be installed in the future. But all do require truck docks. We do not go so far in the effort to achieve flexibility as putting in switch tracks not immediately required, but it is a good idea to be a little extra generous with truck facilities. Putting docks in extra locations is also good insurance, and tends to help the sale to another industry if that should prove necessary. Due to the rigors of the Chicago winter, the majority of our switch tracks and truck docks are brought into the building.

Office space is also a standard requirement, but here it is not so easy to prepare for other industries. There is, in other words, less possibility of standardizing office space requirements. In our experience, however, this factor has rarely been a serious obstacle to conversion of use; it is usually possible to develop factory space for office purposes.

It is possible also to develop the office space itself for considerable flexibility in partitioning and use. Our practice is to use continuous bands of window sash, arranged on a 4-ft. module. This makes rearrangement of interiors a simple matter, gives good light, and makes for logical, clean exterior design.

Parenthetically, this matter of exterior design is not something to be dismissed as unimportant. With all of the study that goes into the economics and efficiency of factory space it is easy to neglect the human aspects of a building in which executives, stenographers and workmen use their abilities and energies in the important task of life. All of them want a place in which their efforts will seem to have a certain dignity, in which they can work with some feeling of pride. That is an essential ingredient of morale. Good design is not usually a mat-

A. H. Hyndman Co. plant for manufacture of small electrical parts. Angling lot lines suggested this treatment of the front. Here wide spans were not necessary, but standardization suggests them

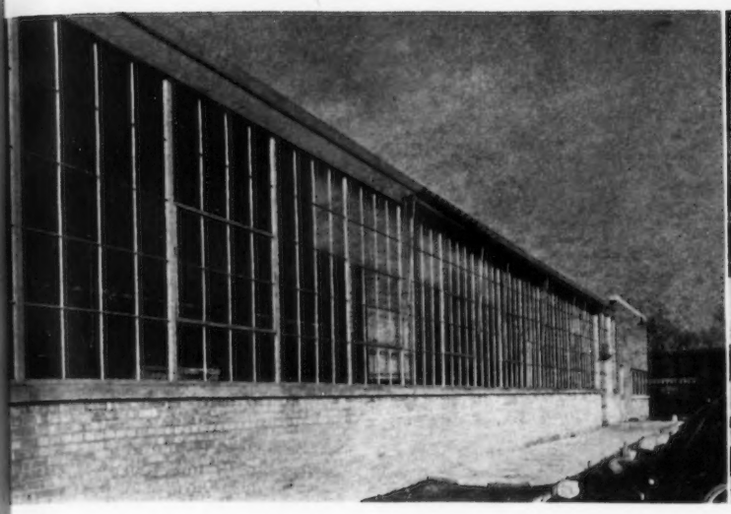

ter of cost, indeed it costs virtually nothing, but it exerts a power to which everybody responds.

And now just a few notes about construction and equipment. These, too, have gradually tended toward a standard pattern, though naturally the pattern does change gradually all of the time.

For factory floors we use a 5-in. concrete slab, with a wire mesh reinforcement. This floor is adequate for a live load of 1,000 lb. per sq. ft., and is suitable for most types of operation. Some clients ask for wood block floors, but few are willing to pay for them.

Lighting is almost all fluorescent. Most companies are installing enough lighting to provide about 25 foot-candles now, but are putting in wiring sufficient for double that intensity. This is usually plenty for general lighting, but naturally there are many installations of local lighting for special tasks.

Air conditioning and radiant heating installations are becoming more and more frequent in the newer plants. A number of them have radiant heating in the office space, and at least one client — a manufacturer of heating equipment — has insisted on it for all of the factory area. Air conditioning is coming in similarly. It is getting to be almost standard practice to install ducts for air conditioning in the construction of the office portion, usually with the actual installation of cooling equipment waiting for a later date.

The trend to more and better facilities for employees is rather marked. As most of the plants here run under 300,000 sq. ft., the matter of employee facilities does not usually involve anything very intricate in planning. Usually it is a matter of general thoughtfulness, or higher standards in the usual things, of better, brighter design. Better locker facilities and rest rooms, and generally more comfortable, more pleasant surroundings; these are gradually getting more attention in both old and new plants. And if this trend in design has the effect of inducing more employees to exhibit their "places" on a Sunday afternoon, all will agree that American enterprise is not whipped yet.

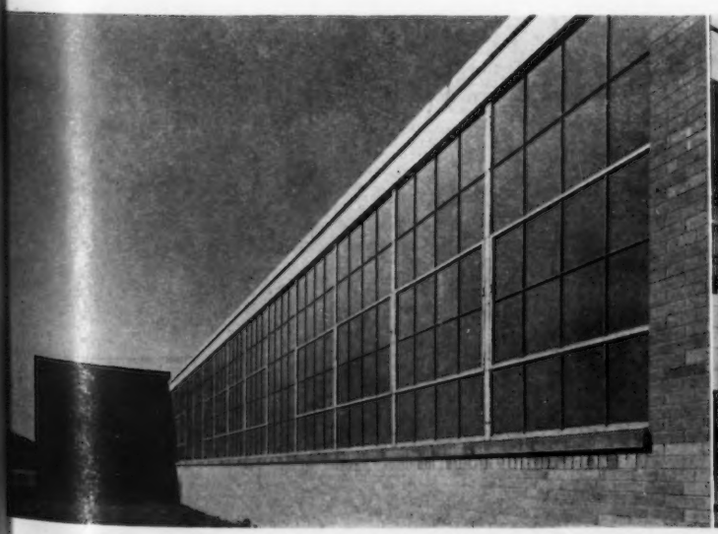

A STANDARDIZED DESIGN FOR LOW COSTS

The H. K. Ferguson Company, Industrial Engineers and Builders

MANY manufacturers have delayed building programs because of what they considered too high construction costs for the facilities they had in mind. This has been especially true when they have been interested in warehousing or some light manufacturing operation which could either be delayed for the present or accomplished in existing, though admittedly undesirable, quarters. Confronted many times by clients with the high-cost argument, The H. K. Ferguson Company set out to develop a low-cost building.

The result is a structure described as "a minimum requirement directed primarily toward a goal of low first cost without sacrificing any desirable features essential to low-cost maintenance or satisfactory production layouts." The building, according to Ferguson estimates, can be constructed in today's market for $3 per sq. ft., in areas greater than 250,000 square feet of floor space. This is a considerable reduction on existing costs, which for conventionally-designed buildings usually range from $5 to $7 per sq. ft.

Ferguson's economies in this structure are predicated on design simplicity. The low-cost building contains no building extras, although it is a modern, fire-resistant, steel-frame structure with interior building services that include its own boiler plant, lighting, ventilation, heating, plumbing, sprinkler and drainage systems. Quality in materials has not been sacrificed to achieve low cost in either construction or maintenance.

As much as possible, Ferguson engineers have employed the mass production principle to cut costs. By using a dead level roof, for example, great economies can be effected in the fabrication and erection of structural steel members. All similar members of the steel frame such as columns, purlins and beams are exact duplicates — thus allowing fabricators to set up production runs when turning out these components. The level roof in itself is a desirable feature, because it can be flooded in summer with consequent cooling effects.

The steel frame, in addition to its simplicity, has been designed to employ only 5.2 lb. of steel per sq. ft. of floor space, contrasted with 7 to 10 lb. normally used. But it must be emphasized that this minimum use of steel does not allow overhead loads such as conveyors or chain hoists to be supported by the framing. Special loads of this type would require additional steel at extra cost. Bay spacing between columns, however, is 24 ft. by 35 ft., sufficiently generous for warehousing and practical for most types of light manufacturing.

Further economies in cost stem from other utilizations of simplicity and mass production methods. All interior footings are identical, and so are all wall footings, a factor which permits reuse of concrete forms over and over with resultant savings in material and labor. The same principles apply to heating, general lighting, plumbing, sprinklers and sewers. The duplication of identical installations in bay after bay permits a maximum of cheap shop fabrication and a minimum of field labor during erection.

Ferguson engineers stress the point that the building is not a cure-all, but rather a way to provide minimum floor space requirements. They believe it can best be employed for warehousing, machine shop or light manufacturing operations that do not require special design around a certain process.

The three-dollar cost also assumes a clear, level, unobstructed site with soil conditions adequate for soil bearing capacity of 4000 lb. per sq. ft. No yardwork such as railroad sidings, sewer water lines, fire lines outside the building, paved parking areas or landscaping have been included in the base price.

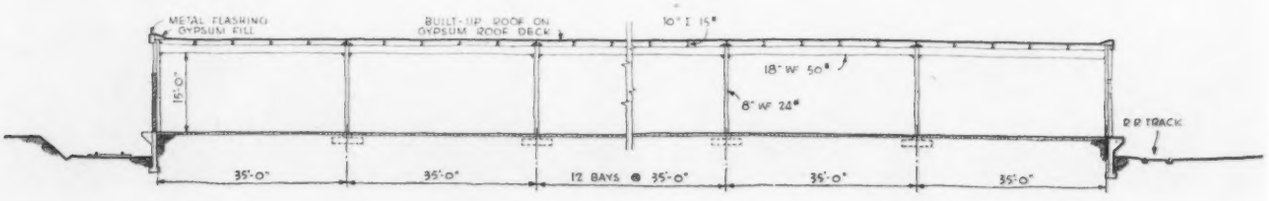

AIR CONDITIONING SYSTEMS FOR RENTAL BUILDINGS

*by George W. Meek**

BASIC objectives of multi-room air conditioning are no different than those of most other types of installations. Temperature, humidity, air motion, cleanliness, and odor level should be controlled to such an extent that the room occupant is unaware of these factors. There is a considerable difference, however, in their methods of accomplishment.

When the application engineer selects equipment for a dress shop, theater, or auditorium, there are not a great number of possible combinations of equipment for him to consider. A building of 10 or more floors, on the other hand, may call for the appraisal of at least 12 entirely different arrangements (see following pages for a comparison of the various systems).

Sometimes the thought is expressed that only basic apparatus design, that is, heat transfer, air flow, compressor design, etc., are fit subjects for engineering discussions. The author submits that the reputation of the engineering profession is influenced to an even greater degree by the success with which the application engineer utilizes equipment to produce "an absence of discomfort" than it is by perhaps five or ten years of strenuous effort to increase a fin coil heat transfer rate, even though such effort is crowned by the spectacular success of a 100 per cent increase. The sheer size of capital expenditure in air conditioning multi-room buildings, such as apartment houses, hospitals, office buildings, and hotels, makes it even more important that engineers and architects first be familiar with all of the more important equipment combinations, and second know intimately the strong and weak points of each for various types of installation.

EQUIPMENT SELECTION

Seldom will it be found that there is only one equipment combination which will produce a quality installation in a multi-room building. Usually two or more approaches, and sometimes quite different ones at that, are theoretically capable of producing a satisfactory installation. The results in each case may depend largely on an intangible that might be called the architect's or engineer's "professional proficiency." No mysticism is intended, but the fact remains that due either to previous experience, education, or sheer difference in professional ability, two engineers or architects may each choose a given equipment combination and get different results. The author cannot hope to point out methods of overcoming such a situation, but examination of published literature shows that there is need for a simplified summary of the many apparatus combinations which must be considered for multi-room buildings, and need for an attempt at a still further analysis of the advantages and disadvantages of each.

The data on each system is presented in tabular form on the following pages primarily for the sake of comparison, even though this arrangement has the disadvantage of limiting comments on those little details which sometimes mean the difference between an outstanding and a mediocre installation.

In regard to the ratings under Item 5 (Relative Considerations), it is obvious that at best the comparative rating (A for best, B, C, etc.) is only a general guide. Actually, the author reluctantly includes Item 5c which is an all-round evaluation of performance.

There seems to be a very definite need for an evaluation of the overall performance of the many systems described on the charts. One must realize, however, that the ratings are extremely relative, and due to individual job considerations may vary through ratings of A to almost D, even with one given type of equipment. In some instances, the importance of one or two considerations may dictate the choice, even though that choice carries a very low rating on other considerations. For example, a hospital arrangement may place such importance on Items 5g (least machinery in a room), 5j (noise level), and 5k (recirculation of air between rooms) as to dictate the selection of a system which has less than an overall A rating.†

DESIGN CONSIDERATIONS

An engineer, architect, or installing contractor may have had years of experience in the design of systems for dress shops, department stores, theaters, individual offices, and all types of industrial applications, and still be unaware of several important aspects of the problem of applying air conditioning to large multi-room buildings. Some of these aspects have their basis in what might be called the psychology of the occupant, but others are a direct outgrowth of special conditions which are not encountered in the many other types of air conditioning installations.

(*Continued on page 116*)

* *Consulting Engineer, Syracuse, N. Y., who presented this subject in a technical paper before a meeting of the American Society of Refrigerating Engineers.*

† *Central apparatus layouts for systems which require centralized cooling, heating, humidification, dehumidification, and air purification, are given in considerable detail in Chapter 43 of the 1946 issue of* American Society of Heating and Ventilating Engineers Guide, *in Section 60 of the 1946 issue of the* American Society of Refrigeration Engineers Data Book, *and in* Modern Air Conditioning, Heating and Ventilating *by Carrier, Cherne, and Grant.*

COMPARISON OF INDIVIDUAL ROOM AIR

FAN TYPE UNITS



I NON VENTILATING TYPE



II VENTILATING TYPE (LOW BLDGS)



III VENTILATING TYPE (HIGH BLDGS)

BASIS OF COMPARISON	I NON VENTILATING TYPE	II VENTILATING TYPE (LOW BLDGS)	III VENTILATING TYPE (HIGH BLDGS)
1. PRINCIPAL FIELDS OF APPLICATION	Speculative or low-priced apartments, hotels, or offices.	High-grade apartments, hotels, office buildings and hospitals, of 2 or 3 stories.	Same as II, but higher buildings.
2. CONTROL OF TEMPERATURE a. Individual control, summer	Yes, by control cold water.	Yes (Same as I)	Yes (Same as I)
b. Individual control, winter	Yes, by control hot water	Yes (Same as I)	Yes (Same as I)
c. Ability to simultaneously heat and cool adjacent rooms	Nil, unless a 4-pipe system is used.	Good, within limits of outdoor air, and fan performance of given unit.	Limited because of smaller primary air volume.
3. CONTROL OF HUMIDITY a. Summer	No, only incidental to cooling.	Same as I.	Same as I.
b. Winter	No.	Difficult because of freezeup problems.	Same as II.
4. SERVICE CONNECTIONS a. Wires	Yes, usually 110 volts.	Same as I.	Same as I.
b. Pipes	3, (supply, return, drain).	Same as I.	Same as I.
c. Comparative sizes of ducts	None.	☐ Large Necessary to cut outer wall.	☐ Small Necessary to cut outer wall.
5. RELATIVE CONSIDERATIONS a. Initial cost *	——	——	——
b. Operating cost *	——	——	——
c. All-round performance (A-Best)	D to E	C to D	C to D
d. Maintenance (A-Least)	C	C	C
e. Use of outside air for cooling in intermediate seasons	No	Yes (A)	Limited to primary air (C)
f. Small ducts or none at all (A-Best)	A	B to C	B
g. Least machinery in room (A-Least)	C to D	C to D	D (High pressure fan)
h. Degree of simultaneous heating and cooling capacity	None (E)	B to C (Good within limits of outside air) (Danger of Freezing).	Very limited (D) (Danger of Freezing).
i. Rate of odor dilution (A-Greatest)	None (E)	Good (B)	Poor (C to D)
j. Discharge grille noise level (A-Lowest)	C to D	C to D	C to D (Must have built-in sound absorber)
k. Likelihood of odor and disease germ recirculation between rooms	A	A	A
l. Least amount of rentable floor space (A-Least)	A	A	A
m. Winter humidification (A-Best)	No	Not practical because of freezeup problems.	Not practical because of freezeup problems.
n. Least cutting and patching required for installations in old buildings (A-Least)	A	B	B
o. Relative demand for engineering skill (A-Most)	D	B to C	B to C
p. System stability (Air flow)	——	Depends on fan characteristics	Stable
q. Supplementary comments	**		

Due to the fact that almost no installations have been made in four years and due to present confusion over wages and prices, no realistic ratings can be made at this time.

CONDITIONING SYSTEMS FOR LARGE MULTI-ROOM BUILDINGS

	SELF-CONTAINED TYPE UNITS	
 **IV** CORRIDOR FAN TYPE UNIT	 **V** WINDOW TYPE PORTABLE (ALSO MADE IN UPRIGHT FLOOR MOUNTED TYPE)	 **VI** "SPECIAL" UNIT FOR HIGH BLDGS
Same as III	For single offices or groups of offices, but seldom more than a few dozen offices in any one building. (Buildings not over 2 to 4 stories high)	Large office buildings, hotels, and apartments. (See Item 5q below)
Yes (Same as I)	Yes, "on-off" only.	Same as V
Yes (Same as I)	Yes, by control of separate heating system (or use of reverse cycle type unit or electric strip heater, but only in southern United States).	
Normally moderate, 100% if 4-pipe system is used.	Excellent.	Excellent.
Same as I.	Yes, but only incidental to cooling.	Same as V.
Good.	No, unless provided by separate central system. Local office freezeup and maintenance of many sprays and floats make local humidification impractical.	
Same as I.	Yes.	Yes.
Same as I.	No drain in air-cooled models. 1 supply, 1 return, and 1 drain pipe in water-cooled models.	Same as V.
Uses corridor as horizontal supply and return for ventilation and dilution only.	No ducts as such. Air openings mounted in lower half of window.	Small opening in wall as in Type III or small opening in lower half of window.
—	—	—
—	—	—
B to C	C	B
B to C	D	D
Limited (C)	A to B (But subject to wide variation between rooms due to fan characteristics on this type of unit).	Limited to primary air. (C to D)
B	A	B
C to D	D	D
B to C	AA to A if radiator heat continuously available.	AA to A if radiator heat available, or if supplementary heating coil is installed in unit.
Good (B)	B (Good, but deposits of tobacco smoke on coil tend to offset this).	Poor (C to D)
B to C	C to D	C to D
C to D	A	A
AA	A	A
A	Impractical, because of maintenance of floats, drains, etc. and likelihood of freezeups.	Same as V
C to D	A	A
A to B	C to D	C to D
Stable	Usually very seriously affected by wind and by stack effect.	Stable
**		This unit was not available prior to the war, but is shown here to indicate its relative standing if such a unit is offered postwar.

*** 4-pipe systems, under 2c above have not been tried extensively and control devices are not highly developed. First expense of 4-pipe system obviously a disadvantage.*

COMPARISON OF INDIVIDUAL ROOM AIR

INDUCTION TYPE UNITS

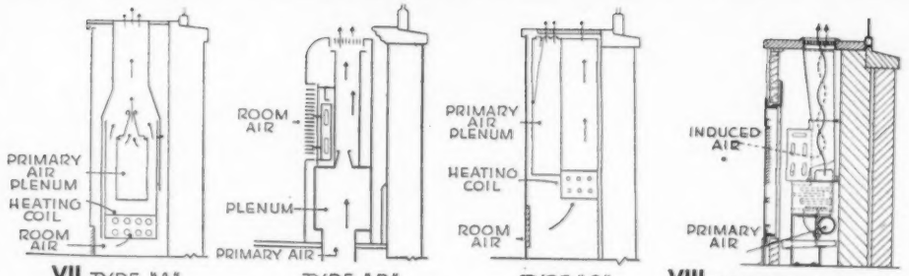

VII TYPE "A" TYPE "B" TYPE "C" VIII "CONDUIT" OR HIGH PRESSURE TYPE

BASIS OF COMPARISON		
1. PRINCIPAL FIELDS OF APPLICATION	Office Buildings. (Both large and small) Banking Spaces Hotels	Apartment Buildings Office Buildings Hotels Hospitals
2. CONTROL OF TEMPERATURE a. Individual control, summer	Yes, by control of primary air, or warm water for reheat.	Yes, by control of water flow only.
b. Individual control, winter	Yes, by control of water or steam flow.	Same as above.
c. Ability to simultaneously heat and cool adjacent rooms	In general very good. If warm water (or steam) is available in summer, this system provides the ultimate in simultaneous heating and cooling capacity.	Yes, but cold water must be supplied in intermediate seasons.
3. CONTROL OF HUMIDITY a. Summer	Very good.	Very good.
b. Winter	Very good.	Good.
4. SERVICE CONNECTIONS a. Wires	No.	No.
b. Pipes	1 supply and 1 return.	1 supply, 1 return and 1 condensate line.
c. Comparative sizes of ducts	Supply [ ] [ ] Return	○ Supply
5. RELATIVE CONSIDERATIONS a. Initial cost *	—	—
b. Operating cost *	—	—
c. All-round performance (A-Best)	Generally A, but AA if summer reheat and adjustable discharge grilles.	A for hospitals, apartments, and hotels. B for office buildings.
d. Maintenance (A-Least)	A	B (because of nozzle and coil cleaning)
e. Use of outside air for cooling in intermediate seasons	A	C or D
f. Small ducts or none at all (A-Best)	C	A
g. Least machinery in room (A-Least)	A	A
h. Degree of simultaneous heating and cooling capacity	With hot water (or steam) and cold air, this system provides the ultimate in simultaneous heating and cooling capacity.	Usually satisfactory, but temperature reduction at night for sleeping room applications is limited.
i. Rate of odor dilution (A-Greatest)	A	C to D
j. Discharge grille noise level (A-Lowest)	B	A
k. Likelihood of odor and disease germ recirculation between rooms	Same as any conventional "central station" system (C to D)	Almost eliminated as far as air conditioning is concerned. (A to B)
l. Least amount of rentable floor space (A-Least)	C	B
m. Winter humidification (A-Best)	A	A to B
n. Least cutting and patching required for installations in old buildings (A-Least)	D	B to C
o. Relative demand for engineering skill (A-Most)	A to B	A to B
p. System stability (Air flow)	Stable without volume control. This system is much less desirable when volume control is used.	Stable.
q. Supplementary comments		

** Due to the fact that almost no installations have been made in four years and due to present confusion over wages and prices, no realistic ratings can be made at this time.*

CONDITIONING SYSTEMS FOR LARGE MULTI-ROOM BUILDINGS

CENTRAL DUCT SYSTEMS



IX CORRIDOR DUCT AND RADIATOR **



X DUAL DUCT SYSTEM



XI PRE-CONDITIONED PRIMARY AIR WITH INDIVIDUAL SUPPLY DUCTS

IX CORRIDOR DUCT AND RADIATOR **	X DUAL DUCT SYSTEM	XI PRE-CONDITIONED PRIMARY AIR WITH INDIVIDUAL SUPPLY DUCTS
Used largely as an addition to existing office buildings, hotels, and apartments.	Large office buildings.	High-grade hotels and apartments.
Yes, by air volume.	Yes, but by air volume which results in need for delicate static pressure control equipment.	Yes
Yes, by radiator control.	Yes, by radiator control or by volume control of "warm" duct.	Yes
Good, provided radiator heat always available.	Very good.	Very good.
Yes **	Yes	Yes, exceptionally good. (Uses chemical dehydration)
Yes **	Yes	Yes
No, unless for automatic controls in each room.	Same as IX.	Same as IX.
Radiator supply and return plus control tubing.	Control tubing.	Control tubing, (occasionally radiators)
*		Individual 6- and 8-inch supply ducts to each room.
B to C	A for office buildings. B to C for hospitals, hotels, apts.	A
A	A to B	A to B
A	A	A
C to D	D	C to D
A	A	A
A if radiator heat available. (D if not)	A	A
A	A	A
A to B	A to B	A to B
Maximum of Recirculation. (C to D)	D	B to C
C to D	C to D	B to C
A	A	A
B to D	C to D	C to D
A	A	A
Unstable unless supplied with delicate control equipment.	Inherently unstable.	Stable.
When used with constant volume and individual reheaters, this makes an excellent system.		

*** This system must be zoned to get given results—with zoning either by fans or local zone heaters.*

(*Continued from page 111*)

Performance expectations. The man who purchases a portable room cooler for his office, for instance, or even the store owner who selects air conditioning equipment for a dress shop, does not expect as much from the equipment as do the office worker and hotel guest. For one thing, the individual or store owner who purchases the equipment is making his *own* selection, and obviously has spent a lot of time in deciding which is the best equipment to buy. Strange as it may seem, he will put up with a lot more in the way of unsatisfactory performance than will a hotel guest, or the occupants of large office buildings, large apartment houses, or hospitals. Justifiable or not, this situation results in the establishment of higher performance expectations for multi-room air conditioning than for almost any other type.

Type and extent of controls. In a building that has an occasional office equipped with room coolers, it is generally found that some one person more or less accepts the responsibility of turning the switches on and off, and of adjusting the knobs to maintain a satisfactory temperature level throughout the day. However, when air conditioning is installed throughout a large office building, it is no longer possible to rely upon the occupants for doing any appreciable manipulating of controls. Even in the case of a large building heated with radiators and an old-style steam system, occupants for some strange reason will open a window when the temperature gets too high rather than turn off the radiator valve. Let the building management install air conditioning, and this psychological quirk, if it can be called that, is magnified many times, and the occupants expect completely automatic temperature control during every minute of the working day.

Variation in standards. In a large office building, hotel, or apartment building, there are hundreds and possibly even thousands of occupants, who vary widely as to age, state of health, and amount of clothing that they wear. All of these factors result in many different ideas of what constitutes "comfort." The old fellow in one office may have been out late last night and lowered his metabolism rate, with the result that what is "comfortable" for him is not at all so for the young sales manager next door. The secretary in the next office may have still another idea as to what is a satisfactory standard of comfort. Consequently, this matter of "variation of standards" is not something to be passed over lightly.

Volume of complaints. Even disregarding the proportionately greater number of occupants in the larger buildings, the factors mentioned make it obvious that the building management will receive a proportionately greater volume of complaints than will occur with most other types of air conditioning installations. The system must be flexible indeed which has any chance of keeping this volume to a practical low level.

Outside space versus central space. Once Btu load sheets are made up for the individual offices, hotel rooms, and apartment rooms, the engineer may in many cases realize that outside factors of sun load and wall transmission represent a greater proportion of the total load than in the more conventional type of air conditioning installation. The greater the use of glass, the more severe this problem becomes, with the result that the air conditioning system must be much more flexible in its capacity control than systems installed in department stores, dress shops, and industrial plants. The trend toward heavier illumination partially offsets this situation, but failure to examine this phase of the design problem carefully may result in the selection of a system which causes a never-ending series of complaints.

Taking all of these factors into consideration, the writer believes that they point up a need for heating and cooling flexibility that is all too frequently overlooked by the designers of multi-room air conditioning installations. For that reason Items 2c (ability to heat and cool adjacent rooms simultaneously), 5e (use of outside air for cooling in intermediate seasons), and 5h (degree of simultaneous heating and cooling capacity), on the comparison chart, represent points which should receive extremely serious consideration — certainly far more serious consideration than they have been given in the past.

AIR DISTRIBUTION

In general, many of the types of systems shown on the comparison charts will give highly satisfactory air distribution within the conditioned space. The hotel or office building which uses a corridor-duct system with radiators under the windows is generally as satisfactory, from the air distribution standpoint, as an induction unit placed under the window. However, in the newer buildings with the trend to lighter wall construction and larger glass areas, a greater portion of the heating and cooling load is concentrated on the periphery of the building. The placing of induction units or fan units along the outside wall assures a more rapid heat exchange between the conditioning air and the room air, with the result that there is still less likelihood of draft complaints.

MAINTENANCE

It is obvious that the amount of maintenance required is a most important factor in the selection of equipment. In general, this point argues against the installation of hundreds of self-contained air conditioning cabinets, each of which has its own motors, compressors, fans, filters, and drains that are potential maintenance hazards.

The problem is not quite so severe with fan type units, and provided the corridor fan type unit is supplied with a quiet and long-lived fan motor, maintenance for such equipment should not be unreasonable. In general, low maintenance favors some type of control duct system such as systems IV, VII, VIII, IX, X and XI.

Generally a dry finned coil picks up less lint and dirt within an office or hotel room than does a wet coil of the identical design. Therefore, in the case of induction units or corridor type fan units (systems using a finned coil in each room), the cleaning problem will be minimized if the primary air is passed through either mechanical dehumidification or chemical dehydration equipment.

While the prime objective of this investigation was the preparation of analysis charts for use in visual comparison and analysis of different types of multi-room air conditioning systems, certain general conclusions may be drawn:

1. The problem of satisfying the user is more difficult in a multi-room air conditioning installation than it is in most other types of installations. Factors are present which call for far greater flexibility as to temperature control, with the result that sizable heating and cooling loads must at many times of the year be cared for simultaneously.
2. In general, the problem of maintenance is such that, for most very large buildings, serious consideration can be given only to some type of central duct system with a minimum of mechanical equipment in the occupied spaces.
3. The complications are so numerous and the monetary value of the equipment so great that any engineer, architect, or installing contractor who has not previously installed air conditioning in a large multi-room building should undertake an assignment in this field only after having given the problem very detailed study.
4. Since literally thousands of people will be exposed to the air conditioning in just one large hotel or office building installation, special effort should be made to assure a high standard of performance in such installations.

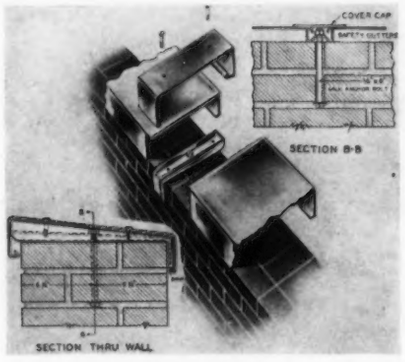

Coping has gutter bar to drain off seepage

METAL COPING

New on the building market is the *Goodwin Lifetime Metal Coping*, which will be produced in a series of standard sizes and edgings to fit most coping jobs. At present production is concentrated on 12½ in. and 8½ in. widths for standard walls. Installation begins with anchor bolts which are set in the mortar or in drilled holes. A formed metal channel fastens to the anchor bolt and longitudinal sheets with crimped edges hook over this gutter bar, forming a tight joint. Over this joint slides the safety cover, held in place by two screws. This construction is said to form a tight joint with room for expansion and contraction; and to provide for disposal of any water seepage by means of the extruded metal gutter bar. The coping is being made in aluminum, copper, Monel, and stainless steel. Overly Mfg. Co., Greensburg, Penn.

FLASHING

New and improved *Thru-Wall Flashing* is designed to prevent leaks and seepage in building walls and so combat disfiguring streaks, stains, and efflorescence, and the rusting of spandrel beams. The following features are offered as outstanding improvements: saw-tooth corrugations that form a mechanical key bond in the mortar; rapid drainage if moisture should penetrate; provision for expansion and contraction; interlocking overlap which requires no soldering; stiff counterflashing face that hugs the wall tightly; and the ease with which it can be worked. This copper flashing is available in sheet form in 6 ft. lengths and standard widths up to and including 34 in. Chase Brass & Copper Co., Waterbury, Conn.

ALUMINUM WIRING

To ease the wire shortage resulting from the temporary scarcity of copper, United States Rubber Co. has announced that it will substitute aluminum for copper in some of its building wire and cable now going into production. The insulated aluminum wiring will be made in all sizes, as approved by Underwriters' Laboratories. According to the announcement, lightweight aluminum has high electrical conductivity and adequate flexibility; and has been developed through research into wire with same overall diameter as equivalent copper sizes. United States Rubber Co., Rockefeller Center, New York, N. Y.

LOCKS

A newly engineered line of lock hardware for doors, *Integralock*, is said to have 30 per cent fewer moving parts. With the exception of the knob casting, all moving parts are of high-strength, pressure-formed metals — extruded brass, cold formed steel, and bronze forgings. Integralock will be available in the mortise type and cut-out type, both with cylinder in knob, in a number of bronze, brass, and chromium finishes. Sargent & Co., New Haven 9, Conn.

HOLLOW WALL SYSTEM

Recently announced is the *Gold Bond Hollow Wall System* which employs two free-standing partitions that are completely independent of each other, without ties or bridging. The result is an interior wall that can readily enclose house plumbing, wiring, and ducts, and which is reported to have unusually high sound-insulation qualities for combating room-to-room noise. These fireproof partitions, erected a specified distance apart to form a single wall, consist of plaster applied to metal lath hung on channel studs, which are fastened to ceiling runners and metal base. Tests indicate that a double wall built in this manner, 4 in. thick, is more effective in reducing noise transmission than an 8-in. hollow tile wall, plastered on both sides. National Gypsum Co., Buffalo 2, N. Y.

AIR FILTER

Easily removed for cleaning and servicing, *Agitair FM Air Filter* is of all-metal construction and consists of layers of metal that induce turbulent cyclonic action of air within the filter. It is designed for efficient performance at an approach velocity of 432 fpm, handling 1200 cfm through a 20 in. by 20 in. filter panel. Frame is of welded cold-rolled steel. Air Devices, Inc., 17 East 42nd St., New York 17, N. Y.

FIRE-FIGHTING AIDS

Two new items have recently been announced in the fire-fighting field. *All Weather* fire hose, pure white in color, is treated for water- and mildew-resistance, and double-jacketed to withstand the abrasive effect of dragging over rough surfaces. Special high-tension cable cord gives reinforcement where most needed. Flexibility is not sacrificed, however, since the hose is said to be of fine quality for easy handling and snug racking. Announced also is the *Foamite Air-form Generating Nozzle*, only 2½ in. in diameter at the widest part of the barrel, which mechanically creates Airfoam through a scientific mixing of water, air, and Foamite Airform Liquid within the nozzle. It is especially recommended for extinguishing fires in flammable oils, paints, and varnishes. The nozzle reportedly can be converted instantly to straight water operation simply by removing the pick-up tube from the Foamite. American-LaFrance-Foamite Corp., Elmira, N. Y.

WALL-VENTED HEATER

Completely self-contained, the *Saf-Aire Heater* operates on natural, manufactured, or liquefied petroleum gas, and features the *Lundstrum Safety Vent*, located just outside the heater on the exterior of the building wall to introduce air and expel gaseous fumes. The heater is installed between the studs of an outside wall, and has a sealed combustion chamber of cast aluminum. Exhaustive tests are said to demonstrate that it is explosion-proof and fireproof, and that operating costs are as much as 20 per cent below that of conventional vented heating systems. An obvious advantage over non-vented systems is the absence of health hazards, and, over other vented types, the elimination of room pipes, flues, or unsightly ducts. The heater is manufactured in two sizes (10,000 and 20,000 Btu), and is available with a thermostat for automatic control. Heating Research Corporation, Muncie, Ind.

Safety vent on exterior wall provides air intake and vent for compact gas heater

(*Continued on page 128*)

COMPARATIVE ECONOMY OF FIREPROOF FLOOR SYSTEMS

By Theodore Barbato, Consulting Engineer

An analysis of floor systems, which are compared as to weight, structural characteristics, relative cost, and availability of materials, for different spans and load conditions

DURING the writer's experience of over 25 years in fireproof floor construction, he has been amazed at the large percentage of projects in which an uneconomical type of floor construction and framing was shown and specified. Too often it has happened that after a complete set of plans has left the architect's and engineer's drafting room, it has been discovered that the choice of a different floor construction would have answered the purpose better in terms of (1) suitability of design to purpose, (2) economy of cost of materials and labor, and (3) economy in time of construction.

Presented herein are a few salient points regarding procedure to follow in arriving at an economical choice of fireproof floor construction and type of framing, for such buildings as hospitals, hotels, schools, apartment houses, and office buildings, where the specified live loads are relatively light and well distributed. Sketch plans and sections for a typical bay of various types of fireproof floor construction most commonly used in the United States are shown on the following pages, with a brief outline of their comparative relative economy, assuming normal availability of materials.

With the present increased cost of materials and labor, the difference between the comparative cost of various types of floor construction has also increased. Therefore, it becomes even more necessary to make the proper choice of an economical construction at the outset, before detailed work in the drafting room gets under way, thereby saving the owner the cost of any redesigning.

Before deciding upon the type of floor construction, it is necessary, of course, to be familiar with (1) local labor conditions, wages, and efficiency, and (2) the availability of local materials. Today's high cost of transportation makes it advisable and economical to make use of locally manufactured materials. It sometimes happens that a project in the vicinity of a hollow tile plant, for example, is designed for metal forms or other type of construction requiring the transportation of materials from a distant point, when a slab employing ordinary partition tile might ultimately have proved more economical and speedier to construct.

SELECTING THE FRAMING SYSTEM

The greatest economy can only be obtained if the owner realizes how much to his advantage is time and money spent in thorough and competent engineering analysis and design.

The writer would caution against too ready reliance upon a single structural framing system as the final answer to economical building construction. Both structural steel and reinforced concrete are excellent materials, and the comparative economy of each may become obvious only by a study of the particular project, analyzing such factors as size of building, soil conditions, number of stories, desired column spacing, availability of materials, labor conditions and costs, transportation costs, and available storage space on the job site.

Reinforced concrete framing is usually most economical in structures with very heavy live loads. For the types of buildings previously mentioned, reinforced concrete framing generally is found to have some slight economy only in structures of moderate height (4 or 5 stories). For higher buildings, greater economy and speedier installation is usually obtained through use of structural steel framing. Lately some housing structures up to 15 stories in height have been designed and constructed of reinforced concrete framing, but this has been due mainly to the existing delay in obtaining deliveries of structural steel rather than to any pronounced inherent economy in this type of construction.

ECONOMY OF FILLER BLOCKS

In all long-span floor constructions, both one-way and two-way, where filler tiles are used, the difference in cost between the filler blocks on forms and the equivalent displaced volume of concrete partly determines the comparative cost of these types of floor slabs. The unit weight of the filler blocks will affect, to some extent, the load on supporting members. Therefore, the difference in cost of framing and foundations should also be considered when comparing the costs of various long span filler tile systems.

BASIS OF COMPARISON

A few points affecting relative economy are summarized for each of the various types of fireproof floor construction illustrated on the following pages. Systems under consideration are suitable for floors subjected to light live loads, and spacing of columns ranging from 16 to 24 ft., inclusive, which is considered a normal range for the types of buildings in question. Most of these floor systems can be used with either structural steel or reinforced concrete framing members, and all comparisons include a plastered ceiling. Also listed are average deadweights for each of the various types of floor construction.

These relative comparisons are based on the prevailing labor rates and material costs in New York City and surrounding areas. Some variation of these costs will be found in other sections of the United States because of the difference in labor rates and material costs, and due allowance should be made for such deviations.

In the following summary of the various floor types, each floor slab that can be used in conjunction with both structural steel framing and reinforced concrete framing is identified with the letters S and C, respectively.

AN ANALYSIS OF FIREPROOF FLOOR SYSTEMS

All types of fireproof floor construction under consideration comply with requirements of the New York City Building Laws for Class 1, Fireproof Structures. Systems are suitable for floors subject to relatively light live loads, on column spacing ranging from 16 to 24 ft. (common to hospitals, hotels, schools, apartment houses and office buildings). Due to changing cost factors, only relative costs can be given.

WEIGHT OF FLOOR CONSTRUCTION

Type 1S	69 lb. per sq. ft.	Type 6C—6S	80 lb. per sq. ft.
Type 2C—2S	77 lb. per sq. ft.	Type 7C—7S	86 lb. per sq. ft.
Type 3C—3S	83 lb. per sq ft.	Type 8C—8S	82 lb. per sq. ft.
Type 4C—4S	90 lb. per sq. ft.	Type 9	95 lb. per sq. ft.
Type 5C—5S	70 lb. per sq. ft.	Type 10S	60 lb. per sq. ft.

(These are average weights for spans varying from 16 to 24 ft., and include weight of all floor construction and ceiling but not finish floor or subflooring. Where systems are suitable for either steel or reinforced concrete framing, average weight is given since the difference in weight of steel and reinforced concrete supporting beams is not a significant factor.)

TYPE 1S
CINDER CONCRETE ARCH, WELDED WIRE FABRIC REINFORCEMENT & STRUCTURAL STEEL FRAMING

Type 1S. Cinder Concrete Arch, Welded Wire Reinforcement:* Most generally used construction in N.Y.C. and metropolitan area, and most economical wherever good quality of cinders is obtainable. This is an excellent fireproofing material and offers good surface for plastering directly on the arch and steel fireproofing. Economical regardless of height of building, floor area, or irregular spacing of columns. Speeds construction since all formwork is suspended from steel floor beams and girders, freeing lower floors of temporary uprights and shoring. Deadweight is lightest with exception of Type 10, permitting economical framing and foundation design. Where cinders of good quality are unavailable, an inexpensive lightweight aggregate can be used.

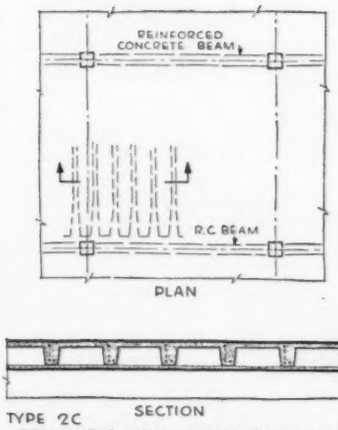

TYPE 2C
REMOVABLE METAL FORMS (ONE-WAY) REINFORCED CONCRETE FRAMING

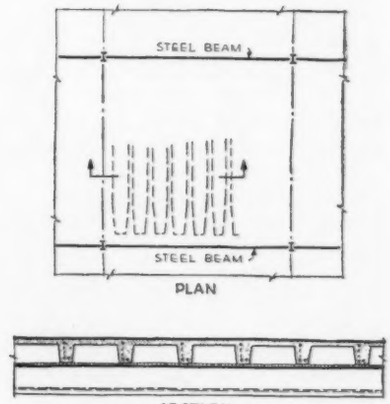

TYPE 2S
REMOVABLE METAL FORMS (ONE-WAY) STRUCTURAL STEEL FRAMING

Type 2C and 2S. One-Way Removable Metal Forms:* Ranks next to Type 1 in economy, and has advantage over many other long span slabs in that open formwork can be used, permitting extensive reuse of temporary planks which support metal forms and construction load at bottom of ribs. Also, there is less weight of material to be handled on the job. Deadweight is not a great deal over that of Type 1. Increased cost becomes proportionally smaller as span or distance between supporting girders increases. Hence, system is very suitable for longer spans. Metal lath is required in order to obtain a smooth plastered ceiling.

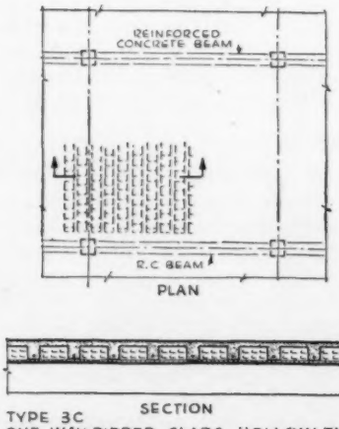

TYPE 3C
ONE-WAY RIBBED SLABS, HOLLOW TILE FILLERS, REINFORCED CONCRETE FRAMING

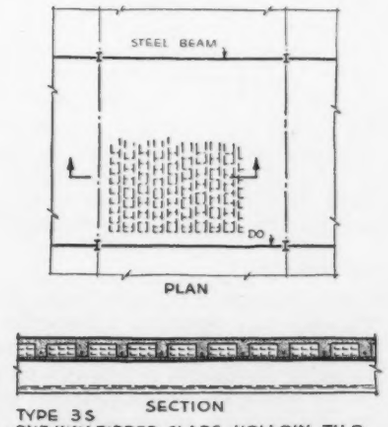

TYPE 3S
ONE-WAY RIBBED SLABS, HOLLOW TILE FILLERS, STRUCTURAL STEEL FRAMING

Type 3C and 3S. One-Way Ribbed Slabs Using Hollow Tile Fillers:* Only slightly more expensive than Type 2. However, if project is located near hollow tile plant it may be more economical than both Types 1 and 2, as filler blocks considered in this comparison are ordinary partition blocks, not special floor blocks. This slab, with an all-scored tile ceiling offers excellent base for plastering.

(*Continued on page 123*)

*C=Reinforced Concrete Framing; S=Structural Steel Framing

MANUFACTURERS' LITERATURE

ACOUSTICS

Gold Bond Acoustimetal. Specifications and construction details on a perforated metal acoustical system. Complete specifications and a section of detailed architectural drawings and technical erection data. 8 pp., illus. National Gypsum Co., Buffalo 2, N. Y.*

ADOBE BRICKS

Cemadobe: How to Make Your Own Bricks of Earth and Build Your Own House. Description of a system of making building bricks of Portland cement and natural soil or adobe. Advantages claimed for this construction, equipment needed to make the brick, general information on house planning, sample floorplans, construction details. 32 pp., illus. Cem-Adobe Co., Dept. AR, Box 81, West Los Angeles Station, Los Angeles 25, Calif. $1.00.

BUILDING STONE

(1) The Nation's Building Stone and **(2) Indiana Limestone: The Nation's Building Stone.** The first of these is a 16 mm. sound film, available without charge to A.I.A. chapters and other interested groups, telling the story of limestone from quarry through mill to finished building. The second is an illustrated booklet (20 pp.) on the same subject; shows quarries, mills, carving procedures, typical buildings and details; describes the stone, gives its characteristics. Indiana Limestone Institute, Bedford, Ind.

COLOR USAGE

Du Pont Color Conditioning for Industry. The use of color to increase production, improve seeing conditions and create a better working environment; fundamental principles of color conditioning. Outlines Safety Color Code for Industry, illustrates a coordinated functional color program for an entire plant. 32 pp., illus. Finishes Division, Dept. M-6, E. I. Du Pont de Nemours and Co. (Inc.), Wilmington 98, Del.*

COMPRESSORS

Worthington HB Single Horizontal Compressors (Bulletin L-640-B1A). Specifications, installation details, accessories, dimensions, general data table. 24 pp., illus. Worthington Pump and Machinery Corp., Harrison, N. J.*

ELEVATORS

(1) Otis Hoistway Door Closer and Electric Interlock, Type 4-B, and **(2) Elevator Car Design 155.** The first of these bulletins describes operation, safety devices, advantages claimed for an electric elevator door closer. Second bulletin illustrates and describes a new car design. 4 pp. ea., illus. Otis Elevator Co., 260 11th Ave., New York City.*

FUEL COST REDUCTION

How to Cut Oil Costs with Robot-Eye Electronic Combustion Control. Bulletin describing a system of combustion control said to show a 15 to 20 per cent reduction in fuel consumption; explanation of the principle of haze control. 4 pp., illus. General Power Plant Corp., 381 Fourth Ave., New York 16, N. Y.

METAL FRAMING

Unistrut. Bulletin describing a method of metal frame construction requiring no drilling and no welding: gives specifications, shows typical installations. 4 pp., illus. Unistrut Products Co., 1013 W. Washington Blvd., Chicago 7, Ill.

METERS, SWITCHES

(1) New FA Main and Range Service Equipment, and **(2) FA Type AC Circuit Breaker.** Bulletins describing meter, switch and fuse boxes and circuit breaker panel boards; complete specifications included. 4 and 8 pp., illus. Frank Adam Electric Co., St. Louis, Mo.*

MOTORS

The A-B-C of Synchronous Motor Control. Booklet telling the story of "conscious" synchronous motor starts, how polarized field-frequency control works, etc. Includes connection diagram, selection chart for control, description of units available, suggestions for the operator. 20 pp., illus. Electric Machinery Mfg. Co., Minneapolis 13, Minn.

MYCALEX

G-E Mycalex. Gives properties, available types, molded parts, fabricated parts, machining practice, ordering information for Mycalex, stone-like product composed of mica and special glass. Includes properties chart of six grades of Mycalex of both compression and injection molded types. 24 pp., illus. Chemical Dept., General Electric Co., Pittsfield, Mass.*

PLASTIC MIXER

For Better Mixes: Rex Mortar and Plaster Mixer (Bulletin 46–11). Descriptive folder illustrating the features of the mixer, giving a table of specifications. 6 pp., illus. Chain Belt Co., 1600 W. Bruce St., Milwaukee 4, Wis.

ROOFING

Choose Your Roof for Rain and Shine. Booklet on asphalt roofing with special emphasis on exterior color design in architecture. Includes tips on home planning and remodeling and the use of color on house exteriors, plus basic information on roofing application. 42 pp., illus. Asphalt Roofing Industry Bureau, 2 W. 45th St., New York 19.

SOUND SYSTEMS

School Sound Systems. Prepared by the Joint Committee on Standards for School Audio Equipment. A guide for the equipment of schools either old or new with audio educational devices. Gives charts of typical school day audio activity programs, diagrams of suggested functional installation for built-in school audio facilities. Discusses installation considerations for the various sections of a school — studios and control room, classrooms, auditorium, etc. 32 pp., illus. Radio Mfgrs. Assn., 1317 F St., N.W., Washington, D. C.

UNDERGROUND PIPE

Therm-O-Tile, The Permanent Conduit for Underground Pipe Lines. Description of Therm-O-Tile, advantages claimed, specifications, installation details, waterproofing procedure. 4 pp., illus. H. W. Porter & Co., Inc., 818-S Frelinghuysen Ave., Newark 5, N. J.*

WALLS

Brick and Tile Cavity Walls. Complete information on cavity wall construction: advantages offered, properties, construction details, cost data. Construction details include installation of windows and doors, electrical conduits, and termite shields. 12 pp., illus. Structural Clay Products Institute, 1756 K St., N.W., Washington 6, D. C.*

WATER PURIFIER

Filt-R-Stil Delivers Drinking Water from Brackish Water. Pamphlet describing potable water units and their use. Includes operating data, specifications of standard models, the mechanical and chemical theories involved. 8 pp., illus. American Cyanamid Co., Ion Exchange Products Dept., 30 Rockefeller Plaza, New York 20, N. Y.

WATERPROOF CONNECTORS

Cannon Electric Type "W" Waterproof Connectors (Bulletin W-146). General information on a line of waterproof connectors designed specifically for sub-marine geophysical exploration but adaptable for use in swamps, lakes, rivers, docks, with underground cable, etc. Includes diagrams, dimensions tables, specifications. 4 pp., illus. Cannon Electric Development Co., Dept. AR, 3209 Humboldt St., Los Angeles 31.*

(*Continued on page 144*)

* *Other product information in Sweet's File, 1946.*

WHAT makes a piano a master-work the eye seldom sees. But the *inside* quality shows up in tone, in performance, in *enduring* service.

With building products, too, it's what's *inside* that counts. Hidden, inside values you can't judge on appearance alone.

That's why building-wise people *insist* on Celotex Building and Insulating Products. They know that the raw materials that go into Celotex products are the finest that nature can grow and man can refine.

They know, too, that rigid production controls all along the line *guarantee* the uniformly high quality of every product bearing the Celotex name.

Tireless laboratory research perfects materials and methods still *more*... helps to maintain Celotex leadership year after year.

These, plus more than a quarter of a century of building materials "know how," are the invaluable ingredients in every Celotex product.

They make a big difference in performance... in long life and low cost maintenance. A difference that has proved its value on hundreds of thousands of building jobs of every kind.

•

There aren't enough of these famous Celotex products to go around *now*—but our plants throughout the country are working day and night to increase production. Everything possible is being done to speed the time when we can supply you with all the Celotex products you need.

Building Board
Interior Finish Boards
Celo-Siding
Rock Wool Insulation
Celo-Rok Sheathing and Wallboard
Celo-Rok Anchor Lath and Plaster
Cemesto
Flexcell
Triple Sealed Shingles

CELOTEX
REG. U.S. PAT. OFF.
BUILDING PRODUCTS

THE CELOTEX CORPORATION • CHICAGO 3, ILLINOIS

LABELS of LEADERSHIP

SYMBOLS THAT MEAN A SUPERIOR STEEL BOILER

The FITZGIBBONS "D" TYPE STEEL BOILER

This is the boiler to heat an apartment or office building — theatre — hospital — school — the City Hall. It has the *right* form and area of combustion chamber to provide most complete combustion of any fuel — the *right* tube arrangement to promote maximum water circulation — the *right* design to make operation markedly convenient. Built in types for oil, gas, stoker and hand firing, and sizes to 42,500 sq. ft. steam. "D" Type Catalog, recently published, on request.

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS' CODE establishes the minimum requirements for the construction of steel boilers. Only manufacturers whose products comply with these standards are authorized to use the A.S.M.E. Code symbol. You will find it on all Fitzgibbons Steel Boilers.

THE HARTFORD STEAM BOILER INSPECTION AND INSURANCE CO. Its mark under the Code symbol is evidence that the "Hartford" has inspected the boiler to see that it complies with A.S.M.E. Code requirements. All Fitzgibbons Steel Boilers are "Hartford-inspected" and bear the "Hartford" mark.

THE STEEL BOILER INSTITUTE. This is an organization whose sole purpose is to rigidly maintain steel boiler standards and rating qualifications. A boiler with this mark may be selected with certainty that it complies with the S.B.I. Rating Code. Fitzgibbons "D" Type boilers have this mark.

ONE MORE SYMBOL that indicates a superior boiler is the Fitzgibbons trade mark. It has earned the established prestige of sixty-one years of dependable steel boiler building and is placed only on boilers which have passed the rigid tests of Fitzgibbons inspectors. Many thousands of boilers now in service attest to the high standard which this mark implies.

SEE THE FITZGIBBONS EXHIBIT
Space 258 — Heating and Ventilating Exposition
Cleveland, January 27-31

Fitzgibbons Boiler Company, Inc.
General Offices: 101 PARK AVENUE, NEW YORK 17, N. Y.
Manufactured at: OSWEGO, N. Y.
SALES BRANCHES IN PRINCIPAL CITIES

FITZGIBBONS

MOST ECONOMICAL IN FUEL
1886
THE FITZGIBBONS BOILER

AN ANALYSIS OF FIREPROOF FLOOR SYSTEMS

(*Continued from page 119*)

Type 4C and 4S. Two-Way Solid Concrete Slabs:* Cost is about equal to that of Type 3. Deadweight is heavier than that of previously considered systems. This construction merits serious consideration, however, if panels between supporting beams are square or nearly so and site has high bearing capacity. Cost of construction can be lowered somewhat in buildings where plastering can be omitted and joints between form panels pointed.

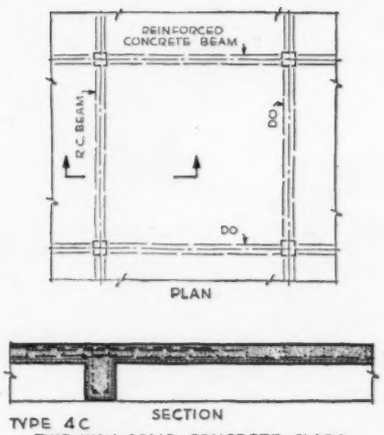

TYPE 4C
TWO-WAY SOLID CONCRETE SLABS
REINFORCED CONCRETE FRAMING

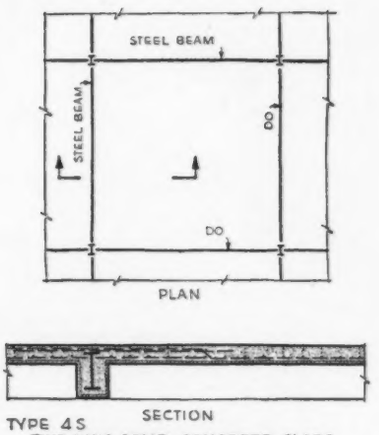

TYPE 4S
TWO-WAY SOLID CONCRETE SLABS
STRUCTURAL STEEL FRAMING

Type 5C and 5S. One-Way Ribbed Slabs Using Lightweight Wood Fibrous Cement Block Fillers:* Similar to Type 3 except that lightweight wood fibrous cement filler blocks are substituted for hollow tile partition blocks. This system is somewhat lighter than Type 3. It offers good bonding surface for plastering and has excellent insulating and acoustical properties. Unit cost per sq. ft. is somewhat higher than Type 3, and increases materially as span or distance between supporting beams or girders is increased.

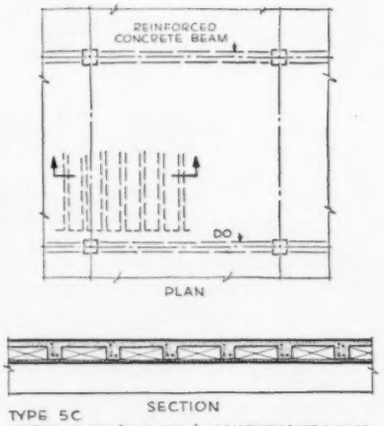

TYPE 5C
RIBBED SLABS (ONE-WAY) LIGHTWEIGHT WOOD FIBROUS CEM. BLOCK FILLERS, REINF. CONC. FRAMG

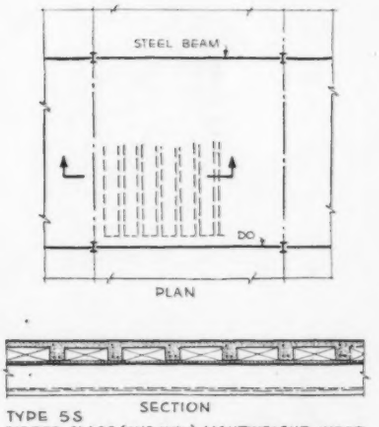

TYPE 5S
RIBBED SLABS (ONE-WAY) LIGHTWEIGHT WOOD FIBROUS CEM. BLOCK FILLERS, STRUCT. STEEL FRAMG

Type 6C and 6S. Two-Way Block Systems:* Consists generally of a combination of concrete and filler blocks of either hollow tile, lightweight aggregate concrete, cinder concrete, gypsum, or lightweight wood fibrous cement blocks. Hollow tile and concrete blocks aid strength of the slab. Cost of these systems is higher than previous types mentioned because difference in cost between filler blocks on forms and equivalent volume of concrete determines their comparative increased cost over two-way solid concrete construction.

Most economical two-way block floor construction usually is obtained by using hollow tile filler blocks composed of ordinary partition blocks, obtainable in most localities.

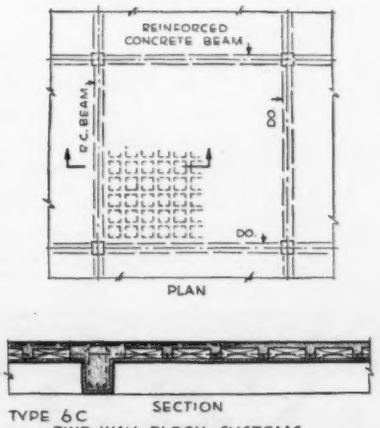

TYPE 6C
TWO-WAY BLOCK SYSTEMS
REINFORCED CONCRETE FRAMING

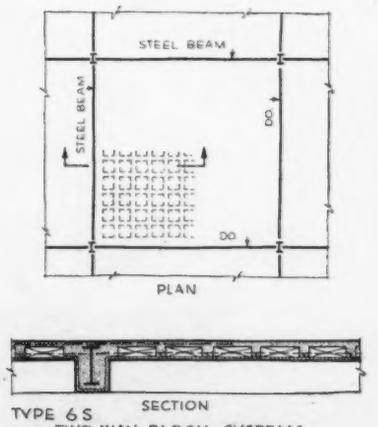

TYPE 6S
TWO-WAY BLOCK SYSTEMS
STRUCTURAL STEEL FRAMING

*C = Reinforced Concrete Framing; S = Structural Steel Framing

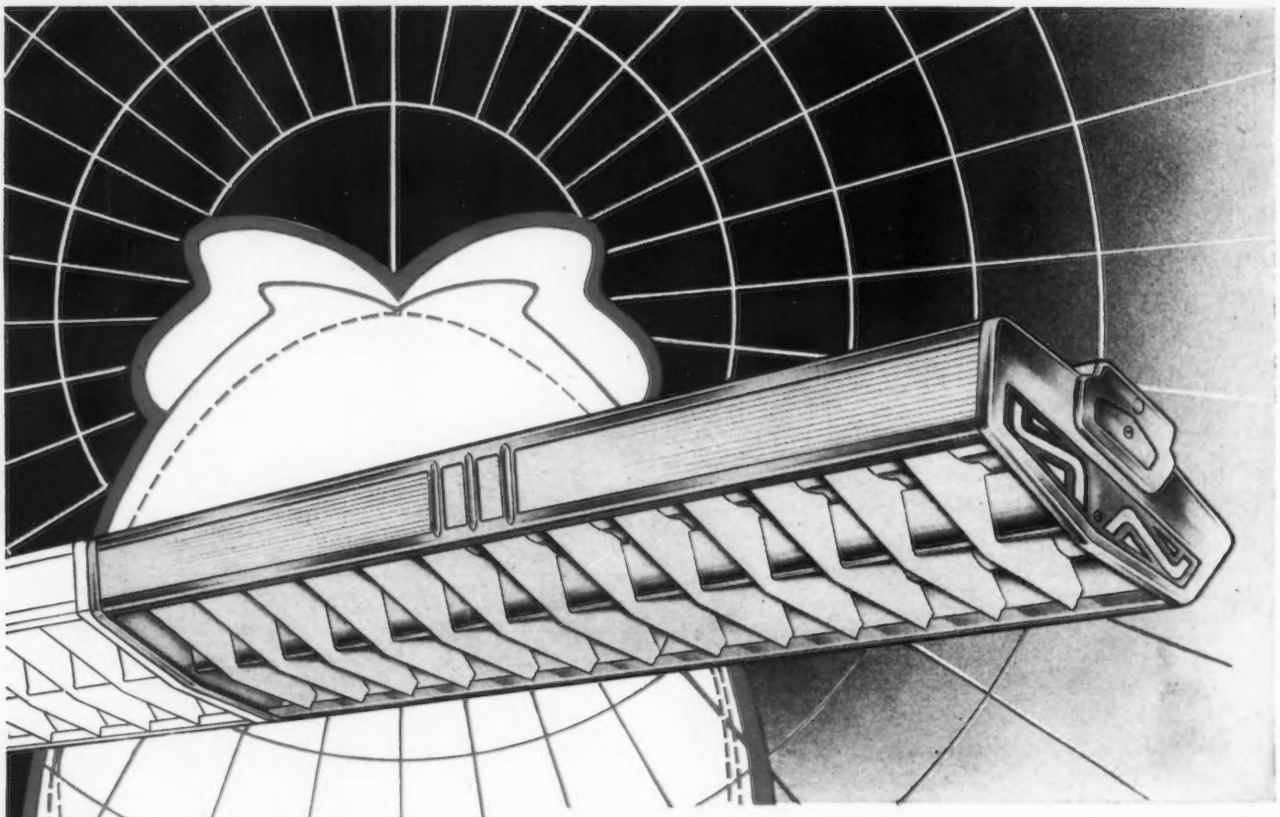

FUNCTIONALLY DESIGNED ...OPTICALLY ENGINEERED

*M*odern, functional Day-Brite Fluorescent Fixtures combine better *light* with better *taste*.

Certified distribution curves prove their efficiency. A variety of pleasing designs to complement the architectural treatment of any installation requirement.

Send for our bulletins or consult your nearest Day-Brite Lighting Engineer for details.

The **VIZ-AID**—Patent V-shaped ALZAK louvers assure more even distribution of glareless light and provide more light on the working plane. For continuous or unit mounting—surface or suspension. Designed for two 40-watt lamps. U. S. Patent No. D-138990—others pending.

Day-Brite Lighting, Inc., 5465 Bulwer Avenue, St. Louis 7, Mo.
Nationally distributed through leading electrical supply houses.
In Canada: address all inquiries to Amalgamated Electric Corp., Ltd., Toronto 6, Ont.

961

IT'S EASY TO SEE WHEN IT'S

DAY-BRITE *Lighting*

AN ANALYSIS OF FIREPROOF FLOOR SYSTEMS

(*Continued from page 123*)

Type 7C and 7S. Solid Stone or Gravel Concrete, Short Span:* With structural steel framing, this system has all the advantages of Type 1 with following exceptions: Cost of slab is greater than cinder concrete mainly because of higher cost of aggregate and increased amount of cement required per unit volume of concrete. Since deadweight is greater, cost of framing and foundations is increased, and depth of supporting beams and girders must be greater.

With reinforced concrete framing, this system is more adaptable to floors with a heavier live load than usually found in non-industrial buildings. High cost of formwork required for numerous beams and girders, and amount of plastering for beam sides and soffits, would further tend to eliminate this type of construction. Welded wire fabric reinforcement may replace bar reinforcement shown.



TYPE 7C SOLID STONE OR GRAVEL CONCRETE, SHORT SPAN REINFORCED CONCRETE FRAM'G

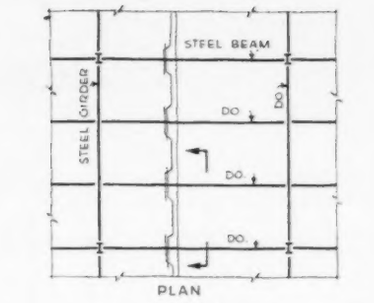

TYPE 7S SOLID STONE OR GRAVEL CONCRETE, SHORT SPAN STRUCTURAL STEEL FRAMING

Type 8C and 8S. Two-Way Removable Metal Domes:* In general, this type of construction costs approximately the same as the more expensive types of two-way block systems. It is sometimes found advisable to use these domes in flat slab construction in order to reduce dead weight of the slab. A metal lath type ceiling usually is required for plastering.



TYPE 8C TWO-WAY REMOVABLE METAL DOMES REINFORCED CONCRETE FRAMING

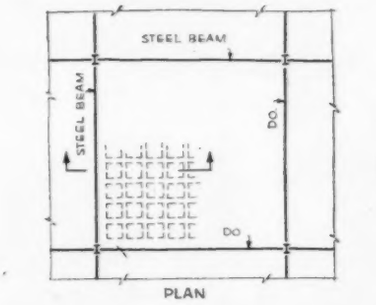

TYPE 8S TWO-WAY REMOVABLE METAL DOMES STRUCTURAL STEEL FRAMING

Type 9. Flat Slab without Column Caps and Drop Panels: Cost is about equal to Type 5. Several of these flat slab systems have been used for relatively light loads but all are a modification of the ordinary flat slab without column caps and drop panels. Sometimes a structural steel column head composed of heavy shallow channels wholly embedded in the slab construction is used. For most economical design, column spacing should be regular, forming square or nearly square panels. Unlike other floor systems, use of steel columns or steel-core concrete columns does not materially increase speed of erection, and its use in multi-story buildings is limited.



TYPE 9 FLAT SLAB WITHOUT COLUMN CAPS AND DROP PANELS

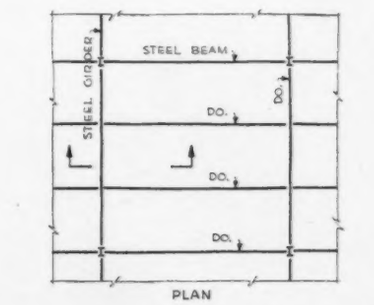

TYPE 10S CELLULAR SHEET STEEL FLOORS SHORT SPAN STRUCTURAL STEEL FRAMING

Type 10S. Cellular Sheet Steel Floors, Short Span:* Relatively high in cost at present due to requirement in large cities that all beams and girders, framing into columns, be individually fireproofed. Underside of floor and intermediate beams must be fire protected by suspended metal lath and ⅞-in. vermiculite plaster below the beams, and covered with a minimum of 2 in. of incombustible fill above the metal floor. However, it has the following important advantages: Cells can be used as raceways for wiring, and construction is lightweight and speedy. The increasing cost of reinforced concrete is undoubtedly closing the gap very fast between this type of floor construction and others.

*C=Reinforced Concrete Framing; S=Structural Steel Framing

What Building Material Now Costs Less Than In 1926?

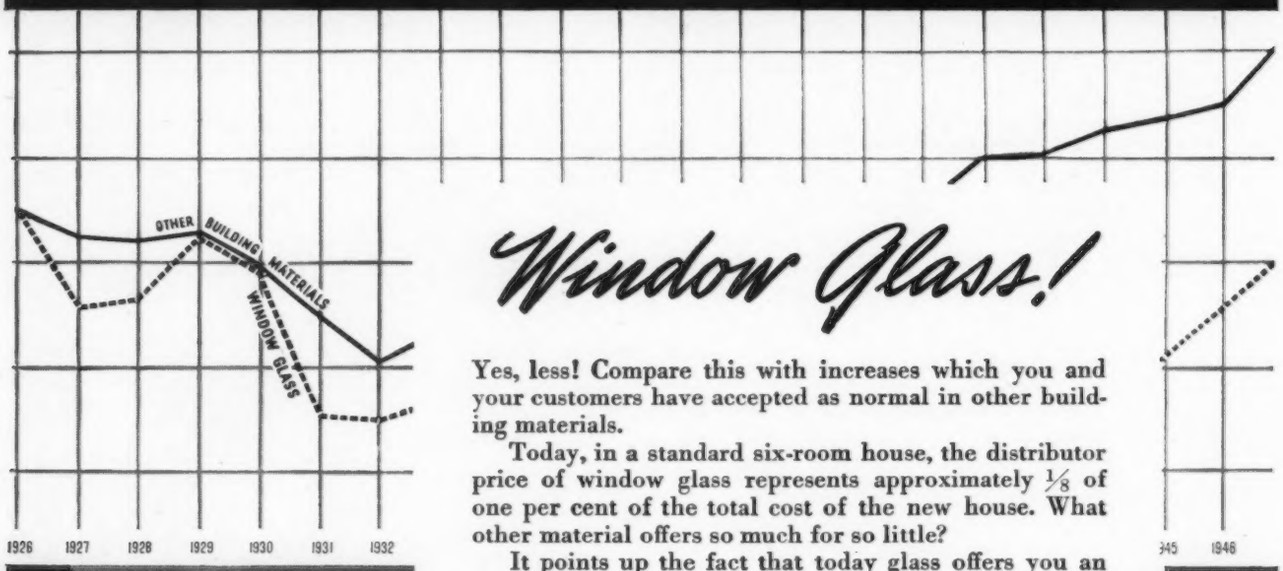

Window Glass!

Yes, less! Compare this with increases which you and your customers have accepted as normal in other building materials.

Today, in a standard six-room house, the distributor price of window glass represents approximately 1/8 of one per cent of the total cost of the new house. What other material offers so much for so little?

It points up the fact that today glass offers you an opportunity to give home buyers the bigger windows they want without materially increasing costs.

Remember, larger windows make the small home seem more spacious—and every square foot of glass in a wall means just that much less use of other materials . . . materials that now cost more. Libbey·Owens·Ford Glass Company, 17126 Nicholas Building, Toledo 3, Ohio.

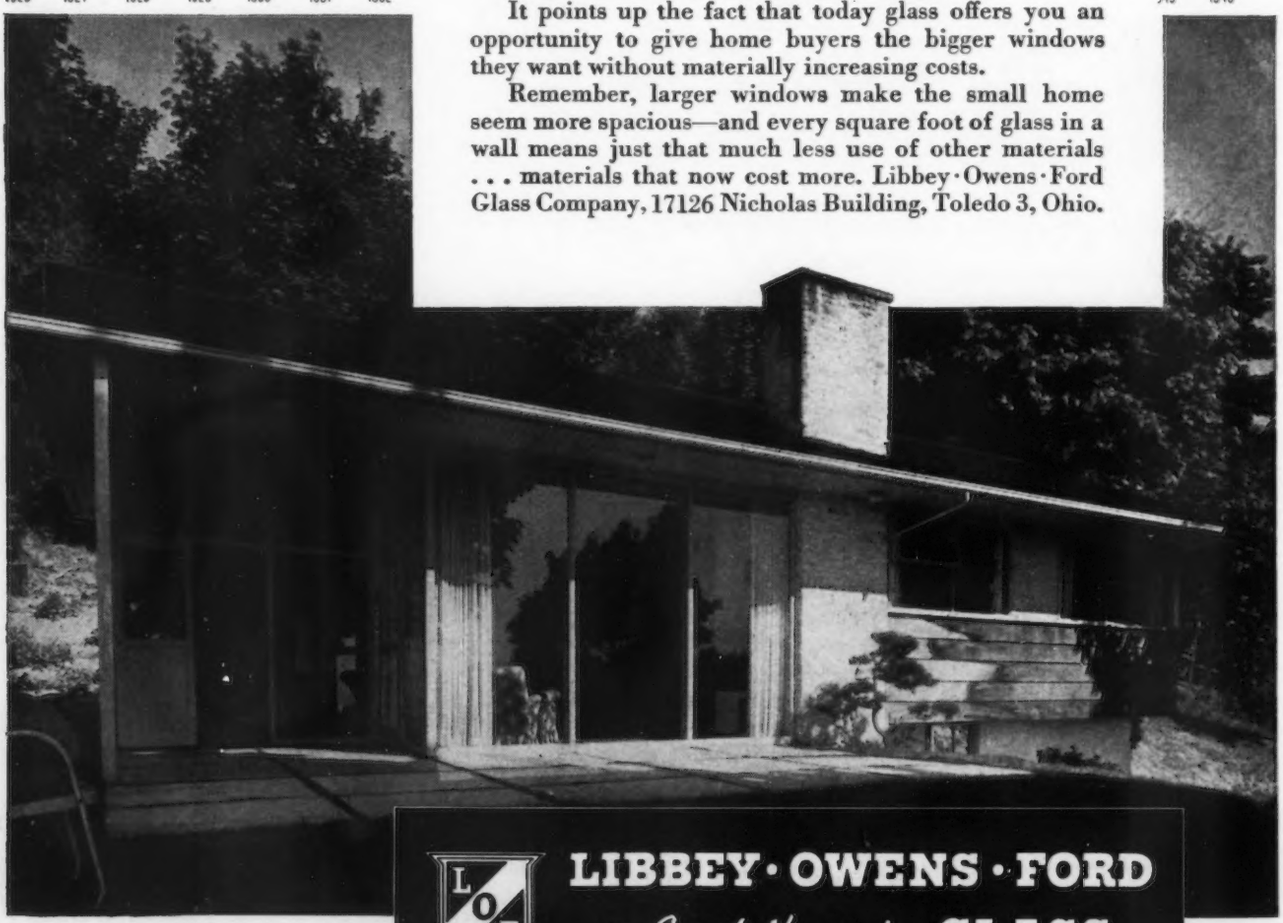

Architect, Paul Thiry

L O F

LIBBEY·OWENS·FORD

a Great Name in **GLASS**

A house, too, can be "caught out on a limb"!

● Every architect and builder knows, of course, that you just can't beat bituminous coal for dependable, uniform, low-cost heat.

But even when a client *insists* on using some other fuel in his new home, be sure you give him the chance to change his mind sometime in the future—and turn to coal.

Otherwise, his house will be "out on a limb" when stoker developments, local coal heating services, cost differentials, or other factors convince him that he should get the benefits of coal heat.

This means: (1) provide a chimney with sufficient flue capacity to burn coal efficiently; (2) provide sufficient space adjacent to the heating unit for eventual coal storage and stoker installation.

The cost of taking such sensible precautions is negligible. And it constitutes valuable insurance of the future value of the home.

Coal supplies uniform, *steady* warmth throughout every portion of each room. For there's always a fire in the furnace—no "pop on and pop off" periods that permit accumulated heat to rise to the ceilings and leave floor areas dangerously cold. That, plus its low cost, is why more than 4 out of every 7 homes in the United States now heat with coal!

Every new home you design or build should be planned to permit the efficient burning of coal—no matter what fuel may initially be selected. In two simple ways you can free any new home to turn to coal—the most plentiful and most economical fuel of all. This means:

1. Provide a chimney of adequate flue capacity.

2. Provide sufficient space adjacent to the heating unit for eventual coal storage and stoker installation.

BITUMINOUS COAL

BITUMINOUS COAL INSTITUTE
Affiliate of NATIONAL COAL ASSOCIATION
Washington, D. C.

(*Continued from page 117*)

STORM WINDOW

A new combination storm window and screen is made of extruded aluminum which permits strong, narrow frames and a wide glass area. Both storm window panels and aluminum screen inserts reportedly can be changed quickly and conveniently, as the seasons demand, from within the house. A sliding panel and louvers at the bottom of the frame provide controlled ventilation. For warmer days, storm window inserts can be tilted for additional ventilation. Since even the screen "cloth" is of aluminum, the window should have exceptional rust-resistant qualities. The Eagle-Picher Co., Cincinnati, Ohio.

ALUMINUM MOLDINGS

New patterns have been added to an existing line of extruded aluminum moldings, as illustrated: (left to right) inside corner or edging, single flange cove, two types of counter nosing, batten strip, and tag molding. They are designed to allow for normal expansion and contraction of panels, and have wide flanges for easy fastening. Matched faces with the same beveled edges on all designs are said to aid perfect membering. For easy storage, identification, and handling, moldings are shipped in a new tubular package holding 24 pieces of either 8 ft. or 12 ft. lengths. The complete line also includes moldings made of plastic, *presdwood*, and stainless steel. Marsh Wall Products, Inc., Dover, Ohio.

New molding designs in aluminum

KITCHEN PLAN NO. 39:

Thirty-ninth of a series of successful mass-feeding kitchen appliances.

This kitchen plan has been designed to provide production of a large menu in a very limited space, to a dining room seating 150 and a Rathskeller seating 50.

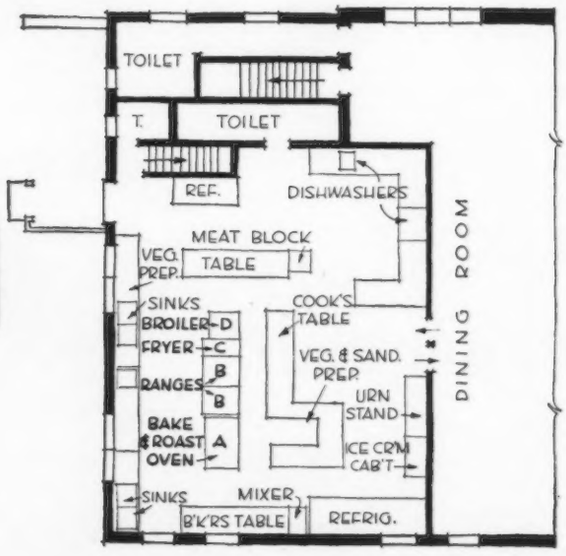

Keep for Handy Reference!

COOKING EQUIPMENT USED:

(a) One No. 959 BLODGETT GAS-FIRED BAKING AND ROASTING OVEN
(b) Two gas-fired solid top ranges
(c) One gas-fired deep fat fryer
(d) One gas-fired broiler

In this case, tight space — usually inadvisable — has been successfully utilized for the production of an involved menu, because it was possible to combine baking and roasting in the one unit. The No. 959 BLODGETT OVEN here used has two sections each separately controlled. One section has two 42" x 32" x 7" baking decks; the other has one compartment 42" x 32" x 12". Extreme flexibility, ease of operation, and high production are provided in approximately 15 square feet of floor space.

The G. S. BLODGETT CO., Inc.

50 Lakeside Avenue — Burlington, Vermont

The new deluxe edition of "Case Histories" is ready— write for it now!

RUBBER FLOOR MATTING

A new type of floor matting is offered for industrial use to furnish a skid-proof and shock-absorbing underfooting, promoting safety and lessening fatigue among workers. Known as *L-CO* floor matting, this is a rubber-link floor covering similar to small rubber-link household mats. Sold by the sq. ft. in any size to meet specifications, it can be fitted to odd-shape rooms and is available in special-purpose mats for work areas or as a wall-to-wall covering. The Loewenthal Co., 188 West Randolph St., Chicago, Ill.

FLOOR PRESERVATIVE

A new preservative, *Lignophol Quick-Drying Finish*, is said to penetrate, preserve, seal, and finish in one application all types of wood floors subject to normal service, providing a gloss finish without undue darkening. It reportedly preserves the wood's resiliency, will not lap or spot, and is highly resistant to wear and the effect of water or alcohol. This finish needs no thinning or special preparation, and is reported to dry so quickly that treated area may be rubbed down within 15 min. after start of application. Waxing, if desired, may be done the following day. Building Products Div., L. Sonneborn Sons, Inc., 88 Lexington Ave., New York 16, N. Y.

LAMP BALLAST

A new *Tulamp ballast* for the operation of two 12-in. *Circline* lamps is said to practically eliminate cylic light variation (stroboscopic effect), since the lamps are operated out of phase with each other. Flat-disc construction, with center hole for mounting, makes it

(*Continued on page 130*)

Duran... Superb

IN THE FINEST SETTING

Chairs by Dorell Mfg. Co., Inc., Flushing, L. I., New York. Installation by Ralph Mernit, Inc.

Here is the fitting complement to your finest creation . . . a unique mating of grace and durability in a truly sensational upholstery covering. Shown here on the handsome aluminum chairs of the Sherry Netherland Hotel, Duran, the modern plastic marvel, merits your highest recommendation. Its flawless craftsmanship of finish, its rich colors, its lasting look of luxury distinctively express the exact atmosphere you plan to achieve. Though elegant to the eye and tempting to the touch, Duran is tough, durable and remarkably resilient with a strength all of its own. No fabric backing is required in this non-peeling, crack free material. Stains or smears leave no permanent blemish for Duran cleans as easily as porcelain. An incomparably distinctive upholstery covering, Duran can be used with equal distinction on walls, panelling or any surface with decorative potentialities.

For subdued dignity in a dining room, relaxing comfort in a restaurant, lively appeal in a lounge . . . for whatever motif your clients desire, suggest Duran for maximum effectiveness. Send for full information and samples today.

Proof Against:
Perspiration
Grease
Water
Alcohol

Resistant To:
Strain
Wear
Creasing
Wrinkling
Scuffing
Sagging
Fading

THE MASLAND DURALEATHER COMPANY
3236-90 AMBER STREET, PHILADELPHIA 34, PA.

(*Continued from page 128*)

easy to assemble on the stem of a portable lamp or conceal in a lamp base, and is adaptable to shallow-type wall or ceiling fixtures. A new junction box which includes a mounting bracket is also available. Specialty Transformer Div., General Electric Co., Schenectady 5, N. Y.

GAS-FIRED FURNACE

Combustion chamber and radiator assembly of the new model of *Janitrol* gas-fired gravity furnaces, Series GC S-64, are constructed of all-welded 18-gauge special steel, with all larger joints seam welded by a special process that imposes a minimum of stress. Furnaces come in two sizes: for 75,000 Btu. and 100,000 Btu., both featuring automatic controls for maintaining even temperature and quiet operation. Standard equipment includes a flame-retention type burner with a special alloy flame diffuser, and a device designed to insure the proper mixture of gas and air and to direct secondary air to the burners. Furnaces have a baked gray hammerloid finish, rounded corners, and a front panel to conceal the controls. Units are reported to be easy to assemble, with a minimum of fasteners. Surface Combustion Corp., Toledo 1, Ohio.

TRUSSED RAFTER

Four typical designs of the *Teco Trussed Rafter* have been developed for spans of 24 to 32 ft., for 24-in. spacing, and 4 in., 5 in., 6 in., and 7 in. per ft. roof slope. According to the manufacturer of special hardware required, this type of wood rafter will save up to 400 ft. of lumber in a one-story two-bedroom house through the elimination of heavy bearing partitions. Rafter has four basic members and four hardware items, for prefabrication or assembly at the site. Timber Engineering Co., 1319 18th St., Washington 6, D. C.

HOME INCINERATOR

An automatic gas-fired refuse disposal unit, the *Calcinator*, is only 18 in. wide, 24 in. deep, and 36 in. high, finished in white enamel for the kitchen, or in baked aluminum finish for utility room, basement, or garage. Said to be smoke-proof and odorless, the disposal unit employs a gas flame smaller than that of a bunsen burner and a down-draft principle to dry the refuse, such as garbage, and then set fire to the dried material. Combustion is reportedly so complete that ash removal is required no oftener than once a week. Calcinator Division, Valley Welding & Boiler Co., Bay City, Mich.

RIPPING AND SIZING SAW

Developed as companion equipment to the Linderman automatic wood prefabricating machine, the *Universal Model 50* power saw can be bought separately for high-production ripping and sizing work. Built on a one-piece steel main frame, it will edge or size panels from 1½ in. to 37 in. in width, or wider when an extension to the carriage is used. A 12-in. saw will rip stock up to 2 in. thick. The machine is provided with a gauge which can be set to the desired width on the graduated table so that all successive panels will be sized alike. Feed-chain links are corrugated and angled so that lumber will travel against the feeding guide during cutting. Four pressure rolls hold the lumber firmly against the chain and assist in holding the wood against the feeding guide, which reportedly assures a perfectly straight cut at all times. Several variations in chain speed are available to take care of different types and thicknesses of lumber. The main countershaft is driven by a standard 10 hp. motor through a multiple V-belt drive. Floor space required is approximately 5 by 5½ ft., including both table and guard. Muskegon Machine Co., Inc., Newburgh, N. Y.

(*Continued on page 132*)

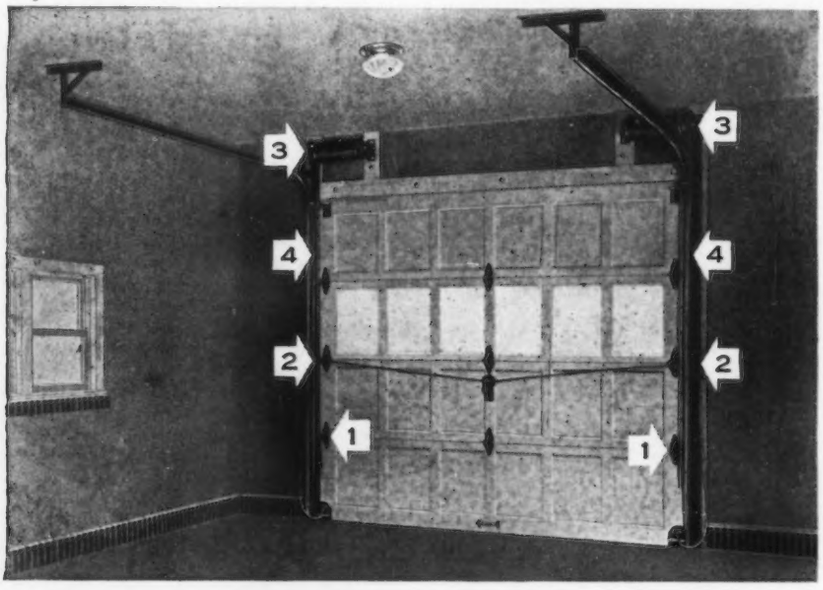

Only the **Barcol OVERdoor**

has All of these features:

1. Weathertight, rattleproof closing without sticking or binding. Roller-crank action.
2. Self-latching. Spring bolts engage automatically when closing.
3. Tailored "Twin Torsion" balance springs. Safe and quiet. Neat appearance.
4. Continuous vertical track brackets on all doors. Rigid. Conceal and protect cable.

BARCOL

FACTORY-TRAINED SALES and SERVICE REPRESENTATIVES IN PRINCIPAL CITIES

BARBER-COLMAN COMPANY
102 MILL ST. • ROCKFORD, ILL.

TWO KINDS OF HEAT IN ONE GREAT MODERN BLEND!

– *that's what Modine Convectors offer you!*

1 RADIANT HEATING

Mild, radiant heat in just enough quantity to offset heat loss from window areas — that's what those arrows represent, coming from the Modine Convector Panel below the window. To this we add . . .

2 CONVECTION HEATING

Warmed air gently circulated throughout the room by Convection heating. Hot water or steam passes through copper heating unit which draws cooler, floor-line air into bottom of convector where it's warmed, rises and passes out through grille.

RESULT: A modern, blended heating system for modern winter comfort — whether it's school, hospital, home or apartment! A heating system that gives you individual room control . . . gentle, draft-free air circulation without the use of moving parts that wear out! Yes, the dependable heating comfort, distinctive charm, space saving, cleanliness, and long service life of Modine Convector Radiation is recommended for all types of residential and institutional heating needs. Look for Modine's representative in the "Where to Buy It" section of your phone book. Write for complete information and free descriptive literature. MODINE MANUFACTURING CO., 1773 Racine St., Racine, Wis.



MODERN BEAUTY



CLOSE TEMPERATURE CONTROL

EASY TO INSTALL

ADDS TO LIVING SPACE

PRICED FOR TODAY'S HOMES AND APARTMENTS

Modine

CONVECTOR RADIATION

The Modern "proved by use" heating method

(*Continued from page 130*)

CONTINUOUS PRINTER

An improved line of table-type printers is now on the market for reproducing direct-process black and white prints, blueprints, and ammonia-type prints from tracings, charts, drawings, and letters. Known as Harvey *B-2* and *B-3* printers, they are designed to produce prints up to 44 in. wide in a continuous operation; from cut sheets or roll stock, in any lengths, at speeds of from 6 to 42 in. per min. Rheostat gives finger-tip control. Moving individual fabric bands run in guides under automatically controlled tension, which are said to eliminate side travel, looseness, and wrinkling of prints. Peck & Harvey, 5736 N. Western Ave., Chicago, Ill.

FLUORESCENT FIXTURES

To simplify maintenance and servicing, several design changes have been made in the Sylvania line of fluorescent fixtures. In commercial fixtures, all ballasts are now fastened to the top-housing with special "Z" screws, making it possible to remove ballast without removing tophousing from the ceiling. In double-length industrial fixtures, models HHF-208 and HFF-308, starters have been relocated to a center position between the two reflectors, which permits the entire group to be serviced at once. Sylvania Electric Products, Inc., 500 Fifth Ave., New York, N. Y.

NIGHT-LIGHT SWITCH

For instant identification in the dark, *Permalite* wall plate contains a tiny electronic bulb built into the translucent plastic housing and operating on standard 110-volt alternating or direct current to furnish a soft red glow in the dark. Switch plate is simple in design and ivory in color. According to the manufacturer, plate can be installed in a few minutes with an ordinary screwdriver; operation costs only one cent a year. It is suggested for hallway, stairway, bedroom, bathroom, nursery, and garage installations, and for photographic darkrooms where red glow will not hamper developing activities. Universal Microphone Co., Dept. AR, Inglewood, Calif.

SCALE DRAWING PAD

Offered as a timesaver for conveying ideas quickly and graphically, a scale drawing pad, *Jiffy Sketch*, enables one to make properly proportioned freehand drawings without use of ruler or drawing board. Sketch pad contains 75 sheets of tracing tissue, approximately 9 by 11 in., within a cover jacket with cardboard flaps on which are printed graphs of varying scale. To use the pad, one folds flap of the desired scale under tissue sheet to act as a guide. Since there are no ruled lines on the tissue to confuse the finished drawing, the sketch pad should offer the advantages of graph paper without its disadvantages. On the reverse of the flaps are printed various architectural and engineering symbols for the help of students. Sheets are perforated for easy removal, and may be blueprinted. Jiffy Sales Co., 1851 East 37th St., Cleveland 14, Ohio.

SHOWER CABINET

Sidewalls and top frame of *Stylite Shower Cabinet* are made of 20-gauge steel with white enamel; floor and base are finished in black enamel, with a footing that is chemically treated to provide a non-skid surface; and exposed fixtures are chromium plated. The entire unit is designed for easy assembly without bolts or screws. Drain and strainer are made for a 2-in. inside caulked soil pipe to lessen cost of installation. The receptor is recessed to allow suitable clearance. Fixtures fur-

(*Continued on page 134*)

MACOMBER

STANDARDIZED SERVICE IN STEEL CONSTRUCTION

ROOF TRUSSES AND ROOF PURLINS
STEEL JOISTS
LONGSPANS
STEEL DECKING AND STEEL SIDING

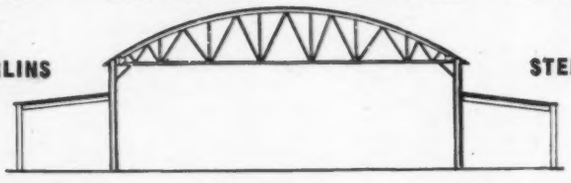

MACOMBER — Masters of the One Story Steel Building, have a real service for you. It includes:

1—Fabrication and erection of the complete building.

2—Fabrication of the roof supporting members only where masonry walls are used.

3—A wealth of engineering information as a result of specialization in this type of construction.

Here is standardization in steel building products that does not limit either you nor the occupant in the kind of building that serves his needs best. Your contractor knows Macomber products. He will expend far less equipment in their erection. If you are interested in some helpful suggestions and further information drop us a line.

MACOMBER
CANTON • OHIO
MEMBER OF THE STEEL JOIST INSTITUTE

COST *per sq. ft.-per Use* Less Than ONE CENT 1¢

ATLAS LABOR-SAVING *SPEED* FORMS

Patents Pending

House Foundation with dividing wall. General Constructions Company, Columbus, Ohio, contractors. Over 20,000 homes are now under construction with Atlas Steel Forms.

YES, Atlas Steel Forms *Speed up* Concrete Construction and do a better job in less time at a lower cost —Less than one cent per sq. ft. per use. Contractors Save 25 to 50% over plywood forms.

Steel forms are good for indefinite use without repairs. Light weight, anyone can handle them. Easy to set up and strip. Strong—no studs or joists required as with wood forms. Write for Illustrated Folder and prices.

FOR RENT OR SALE

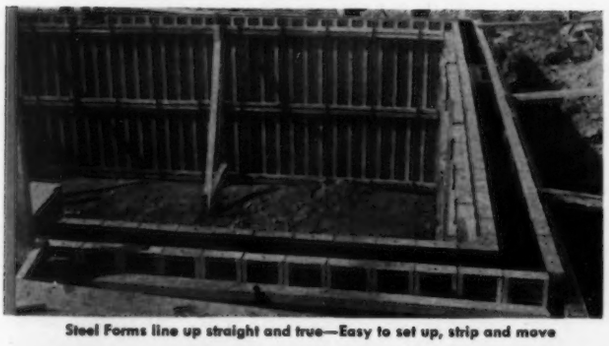

Steel Forms line up straight and true—Easy to set up, strip and move

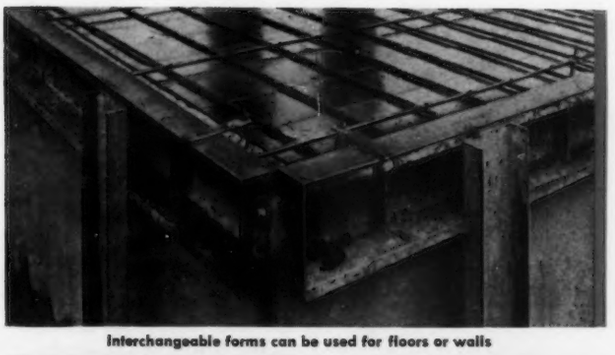

Interchangeable forms can be used for floors or walls

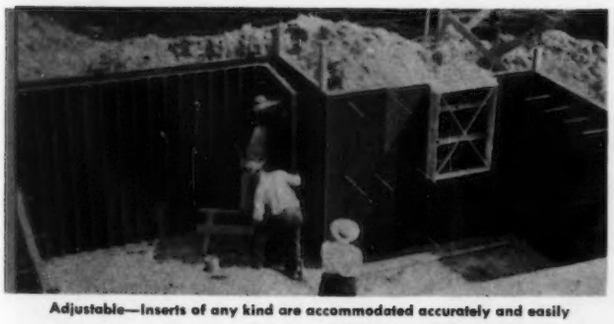

Adjustable—Inserts of any kind are accommodated accurately and easily

Interior view shows the smooth finish—no grain marks. Nothing to remove

Irvington Form & Tank Corporation

IRVINGTON 24, N. Y.

NEW YORK CITY SALES OFFICE — 43 CEDAR STREET

Write Dept. A *Tel. BOwling Green 9-4030*

Atlas Steel Forms for every Purpose

(*Continued from page 132*)

nished with the cabinet include receptor, supply valve, shower head and arm, soap dish, curtain rod and hooks, white duck curtains, and drain and strainer. The Sanymetal Products Co., Inc., 1705 Urbana Rd., Cleveland 12, Ohio.

THERMOSTAT

Safety features are claimed for Cam-Stat *Model CD109A Thermostat:* no electrical parts exposed beneath the screen, and all current carrying parts enclosed within a Bakelite housing behind the wall plate. No larger than an ordinary light switch, this thermostat extends outward less than 1 in. from the wall, and is reported to be easy to install to a conventional conduit box. Current-carrying capacity is 1500 volt-amps, ¼ Hp., and 125 volt-amps pilot duty at 120 through 240 volts alternating-current. Range is standard at 50 to 100 deg. F. with a differential of 2 to 3 deg. F. Cam-Stat, Inc., Dept. AR, 2037 South La Cienega, Los Angeles, Calif.

usAIRco
Evaporative Condensers

More Efficient Condensing of Refrigerants PLUS Big Water Savings . . .

The evaporative condenser is a "packaged" unit in that it incorporates all the desirable features of the conventional shell and tube condenser, water cooling tower and water pump in a single, compact piece of equipment.

Savings up to 95% in water costs are possible with the use of evaporative condensers for refrigeration or air conditioning applications. They also eliminate waste water disposal problems, and pumping costs are much lower than those of a conventional cooling tower installation.

usAIRco Evaporative Condensers are designed for maximum economy and efficiency in operation. Complete design and engineering information may be had on usAIRco Evaporative Condensers by requesting a copy of special bulletin.


REFRIGERATED AIR CONDITIONING UNITS


HEATING & COOLING COILS


UNIT & BLAST HEATERS


BLOWERS & FANS


AIR WASHERS

United States Air Conditioning Corporation
COMO AVENUE S.E. AT 33RD
MINNEAPOLIS 14, MINNESOTA

STANDARDS

Pine Stock Doors

After acceptance by a satisfactory majority of manufacturers, distributors, and users, Commercial Standard CS120-46, Ponderosa Pine Stock Doors, is announced. It provides minimum specifications for these doors in four nominal thicknesses, ¾ in., 1⅛ in., 1⅜ in., and 1¾ in., covering construction, grades, and tolerances. Major changes include deletion of 18 designs and addition of two new ones, and an improved listing of standard sizes, segregated according to designs and use. National Bureau of Standards, Washington 25, D. C.

Plywood

Upon recommendation of Hardwood Plywood Institute, a revision of Commercial Standard CS35-42, Plywood (Hardwood and Eastern Red Cedar), is being circulated for acceptance. Among changes proposed are a complete revision of all grades according to present manufacturing practice and use, inclusion of a tabular form for easy comparison of defects permitted in various grades and species, and deletion of eastern red cedar, a softwood. National Bureau of Standards, Washington 25, D. C.

Asphalt Tile

A proposed Simplified Practice Recommendation for Asphalt Tile, suggested by Asphalt Tile Institute, is available for consideration, comment and approval. Recommendation would establish simplified lists of sizes and colors of asphalt tile and cove base adequate for all ordinary needs. Division of Simplified Practice, National Bureau of Standards, Washington 25, D. C.

Insulating Boards

Before the industry for acceptance is a revision of Simplified Practice Recommendation R179-42, Structural Insulating Board (Wood or Other Vegetable Fiber), proposed by the Insulation Board Institute. Among other revisions, a number of standard stock-production items are no longer recommended, including thin board, and a simplified list of recommended sizes, thickness, edges, and surface colors has been added for interior boards. Division of Simplified Practice, National Bureau of Standards. Washington 25, D. C.

Metal Lath

Revised 1946 edition of "Metal Lath Specifications for Better Plastering and Concrete Stucco" gives latest recommendations of the industry covering quality of materials and methods of application for all types of metal lath (expanded, ribbed, and sheet). Metal Lath Manufacturers Assn., Engineers Bldg., Cleveland 14, Ohio.

WALLS OF *fabron* — FOR EFFICIENT OPERATION

REG. U. S. PAT. OFF.

FOR HOSPITALS

Contemporary architecture is based on the principle that the design of a building suggest the purpose for which it is built. Applying this principle to the interior, it means that the materials used in the design of the various spaces be in keeping with the purpose of the building and contribute to its efficient operation by reducing the cost of its maintenance.

FABRON — the fabric-plastic-lacquer wall finish — was engineered to serve this **dual** function. It decorates the wall in appropriate colors and patterns and completes the structure — reinforces the substructure — serves as a wall-protective agent — and thereby eliminates wall repairs, replacements, and frequent redecorations by **forestalling the causes** of such costly occurences — important savings which benefit the client.

FABRON contributes to efficiency of operation not only because of its permanency, but because of its practical advantages — it can be washed with soap and water to restore its original freshness — its colors are compounded to resist the action of light — it withstands ordinary impacts and can be easily and invisibly repaired.

FOR HOTELS

FABRON thus meets every requirement of the architect and serves as a permanent reminder to his client of the wisdom of his recommendation.

Please use the coupon for further information

fabron
THE FABRIC WALL COVERING

- easy to apply
- easy to clean
- sunfast colors
- resists scuffing
- prevents plaster cracks
- permanent decoration

SEE OUR CATALOG IN SWEETS FILE

FREDERIC BLANK & CO., INC. AR 12-46
230 Park Ave., New York 17, N. Y.

In ref. to (*project*).....
please send more information about FABRON or DETRON.

Name.....

Address.....

City ..... Zone..... State.....

FREDERIC BLANK & COMPANY, INC.

230 PARK AVENUE *Established 1913* **NEW YORK 17, N. Y.**

housing needs of today's American family. Headed by J. Marshall Miller, director of the Planning and Housing Division of the Columbia School of Architecture, the course is designed to aid members of real estate firms, architects, government employees engaged in housing work, and others who are wrestling with problems of housing administration and management. Visiting lecturers will include Charles S. Ascher, director of Region 2 of the NHA; Hugh R. Pomeroy, director of the Westchester County Department of Planning and formerly executive director of the National Association of Housing Officials; and Edward Weinfeld, former State Commissioner of Housing.

A course in town planning, given jointly by an architect, an engineer and a sociologist, has been organized for Cooper Union Art School students of architecture. Staff for the new course will be Dr. Paul Zudker, architect and former dean of the Faculty of Fine Arts in the University of Lessing, Berlin; Prof. John A. Ely, president, Association of Chinese and American Engineers, and former dean of the School of Civil Engineering at St. John's University, Shanghai; Dr. Edwin S. Burdell, director, The Cooper Union, and former dean of Social Sciences at M.I.T. The concrete problem which will be the semester's class project is a planned program for the expansion of Rye, N. Y.

Draperies that *CANNOT BURN* protect patrons at the WALDORF-ASTORIA

POWDER ROOM to the STARLIGHT ROOF

Fiberglas fabric in dramatic Tropical Print—chartreuse on grey—has been used for the draperies and lamp shades in this charmingly feminine lounge. The famous *Starlight Roof* and other public rooms in the WALDORF-ASTORIA have achieved new fire-safety through clever use of Fiberglas fabrics in exciting prints and luscious solid colors. *Decorated by W. & J. Sloane, Contract Division, New York.*

FIBERGLAS* Listed by Underwriters' Laboratories, Inc., as "Non-Combustible Fabric;" approved by the Bureau of Standards and Appeals, City of New York.

Permanently fire-safe curtains and draperies—made of Fiberglas*. These decorative, non-combustible fabrics *woven entirely of finely spun glass filaments* eliminate the hazards of temporary flame proofing—*always operate at 100% efficiency.* Immune to rot or decay; will not emit choking fumes if exposed to fire; do not absorb smoke odors.

Fiberglas fabrics are setting new standards of protection and beauty in hotels, restaurants, night clubs and schools. Their unique fire-safety features are equally important to theatres, industrial and public buildings, ships, planes and trains. Endorsed by public safety officials here and abroad; used in all ships of the U. S. Navy (Bur. of Ships Spec. 27c7).

WRITE FOR SAMPLES AND INFORMATION

THORTEL

FIREPROOF FABRICS

ARCHITECTS BUILDING, 101 PARK AVENUE, NEW YORK 17, N. Y. • LEXINGTON 2-0711

***Sales representatives or recommended workrooms in:* BOSTON, BUFFALO, CHICAGO, CINCINNATI, CLEVELAND, DETROIT, LOS ANGELES, OAKLAND, PHILADELPHIA, PITTSBURGH, ST. LOUIS, TOLEDO, NEW ORLEANS.**

*T. M. Reg. U. S. Pat. Off. Owens-Corning Fiberglas Corporation

OFFICE NOTES

Offices Opened, Reopened

John K. Cross, Architect, formerly of Mackenzie and Cross, Architects, of Baltimore, Md., and more recently assistant project manager in the Washington offices of Irons & Reynolds, Inc., has reopened his office for the practice of architecture at 328 N. Charles St., Baltimore 1, Md., and 4716 Chevy Chase Blvd., Washington 15, D. C.

John A. Fletcher will open his office for the practice of architecture at 547 Landis Ave., Vineland, N. J., on January 2, 1947.

Kenneth H. Hess, Architect, has reopened his office at 32 S. Oak St., Ventura, Calif., following five years with the Army Air Forces.

Christopher P. Kantianis, Architect, recently released from active duty with the Navy, has opened his office in the Springfield Natl. Bank Bldg., Springfield, Mass.

André Merle Associates, Architectural Engineers, have reopened their offices in the Southern Bldg., Washington 5, D. C.

Alves D. O'Keefe, Architect and Consulting Engineer, has reopened his office at 401 E. Jefferson St., Plymouth, Ind., following completion of engagements in war projects.

Pace Associates, Planners, Architects, Consulting Engineers, have announced the opening of an office at 53 W. Jackson Blvd., Chicago 4, Ill. Associates in the firm are W. H. Binford, C. B. Genther, William B. Cobb and John F. Kausal, architects; Walter T. Stopa, industrial engineer; Morris C. Hertel, architect. Consulting engineers are Arthur W. Nelson, LeRoy H. Nettnin and Syberen F. Nydam. Field Superintendent is K. D. Farwell, civil engineer.

New Addresses

The following new addresses have been announced:

M. L. Barker, A.I.A., and G. Lawrence Ott, A.I.A., Architects, 4334 W. Pico Blvd., Los Angeles 6, Calif.

Arthur A. Kober, Contractor, 1630 W. Thompson St., Philadelphia 21, Penn.

Herman Charles Light, A.I.A., 8205

(*Continued on page 138*)

"BUT WHAT'S YOUR LAST NAME?"

Our last name is *Koppers*. Many of you know our "children" by their "first names," but do you know their last name?

That is important to us, and it's important to you, too.

Many of you vouch for the extra service you get from Fast's Self-aligning Couplings or American Hammered Piston Rings, or White Tar insecticides or D-H-S-Bronze . . . and don't know that their last name is Koppers. If you know, you are probably disposed to put more than ordinary trust in other products made by Koppers.

Did you know that you can get a Koppers product for coating metal surfaces to prevent corrosion? A Koppers material that makes roofs last longer? Lumber that defies decay and termites? And many other products made with the same skill and originality and inventiveness as those?

So . . . look for this trade-mark which will soon be found on all Koppers products. Here it is.

K
KOPPERS

It is the mark of an organization which is engaged in many phases of engineering, construction, chemistry and coal carbonization . . . is in the forefront of new synthetic developments . . . is an important supplier to the pharmaceutical industry and to many other industries. For top value, look for this mark. Koppers Company, Inc., Koppers Building, Pittsburgh 19, Pennsylvania.

THE INDUSTRY THAT SERVES ALL INDUSTRY

For example . . .
for the construction industry

Among the principal products Koppers provides for the construction industry are:

Pressure-treated lumber which resists decay, termites, marine borers, fire and acid attacks.

Coal tar pitch roofing which adds years of life to built-up roofs.

Coal tar pitch waterproofing and dampproofing for foundations, retaining walls and other places where concrete or masonry are exposed to water.

Plastipitch Protected Metal for roofing, siding, gutters, downspouts, etc.

Pitchmastic Flooring.

Tarmac road tar for roads, walks, parking areas, etc.

Bituminous-base paints and coatings.

W. Third St., Los Angeles, Calif.

Robert W. Loomis, Structural Engineer, The Plaza Bldg., Windsor, Conn.

Don Muntz, General Contractor, 5542 E. Second St., Long Beach 3, Calif.

Oxychloride Cement Assn., Inc., 1028 Connecticut Ave., Washington 6, D. C.

George Wharton Pepper, Jr., A.I.A., Maurice Fletcher, A.I.A., and John Howard Taylor, A.I.A., Associated Architects, Lewis Tower, 225 S. 15th St., Philadelphia 2, Penn.

Firm Changes

Harvey P. Clarkson, A.I.A., and Serge P. Petroff, A.I.A., have announced the formation of a partnership under the firm name of Petroff and Clarkson, Architects, with offices at 26 E. 55th St., New York 22, N. Y.

W. C. Grant Co., Inc., Contracting Engineers, Indianapolis, Ind., announce that the four departmental branches of their expanded engineering division have been placed under the management of Erskine G. Roberts, engineer.

Industrial Designers and Builders Associates are changing their firm name to Construction Associates. Address, 639 S. Wilton Pl., Los Angeles 5, Calif.

Russell Lehmann and William Bartell have joined the architectural design staff of the General Electric Company's Home Bureau.

Col. James A. MacAlarney, recently with the Corps of Engineers, U. S. Army, has joined F. H. McGraw & Co., engineers and constructors, Hartford, Conn.

John A. Weaver, designer and architectural specialist for R. H. Macy & Co. from 1928 to 1942, has joined the staff of Raymond Loewy Associates, industrial designers.

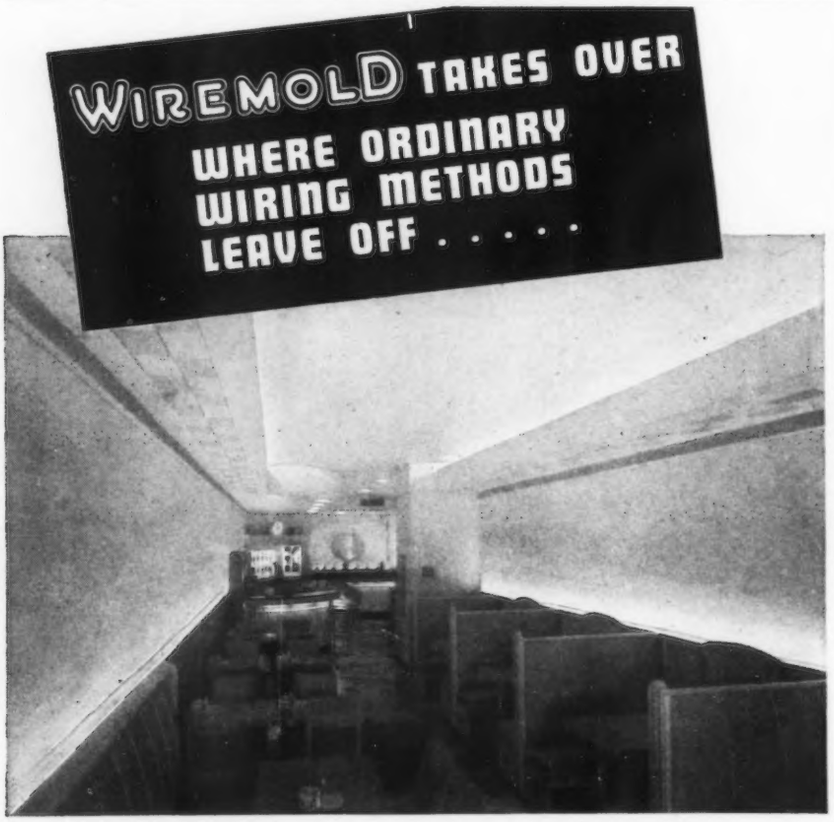

FLUORESCENT COVE LIGHTING

FLUORESCENT COVE LIGHTING . . . panel and wall case lighting, and special architectural lighting effects . . . are easily installed by electrical contractors who "know their Wiremold" because Wiremold Wiring Systems and simplified methods have been developed to meet these specialized lighting requirements... particularly where space is limited. Interconnectable with all other types of wiring, Wiremold Systems provide a practical solution to difficult wiring problems.

See our catalog listing in the current edition of Sweet's File. Also ask us to send you architects' Engineering Data Sheets.

THE WIREMOLD CO. HARTFORD 10, CONN.

APPOINTMENTS

The following appointments have been announced:

G. Lyle Belsley, assistant administrator of the NHA in charge of administration; he will be responsible for NHA management activities, including budget, accounting, personnel, training and administrative services.

Marshall Crossman, to the administrative staff of the Veterans Administration construction, supply and real estate service.

Archie J. Doolittle, assistant executive manager in charge of production, Eggers & Higgins, Architects.

G. J. Fink, executive secretary, Oxychloride Cement Association, Inc.

Andrew L. Harris, executive secretary of the Producers' Council.

Edward M. Howard, district engineer of the Asphalt Institute's territory comprising the six New England States.

Casimir Krulik, to the New York City Housing Authority's newly-created job of materials expediter.

Norman R. Miller, an assistant to the director of field operations of the NHA.

Zoltan I. Poharnok, official American representative of the Hungarian Council of Arts; Mr. Poharnok will establish offices shortly.

Merrill M. Tozier, special assistant to Commissioner Dillon S. Myer of the FPHA.

ELECTIONS

Charles C. Platt, New York architect, has been reelected president of the Municipal Art Society of New York. A member of the executive committee of the Architectural League of New York and of the American Artists Professional League, he also has been elected a governor of the Real Estate Board of New York.

Tyler S. Rogers, of Toledo, Ohio, has been elected president of the Producers' Council.

The Society of Industrial Designers has announced the election of the fol-

(*Continued on page 140*)

The Blue Room
Roosevelt Hotel • New Orleans, La.
Interiors designed and executed by
Studio of Jac Lessman
New York

Lighting Fixtures
WITH EYE APPEAL

ALL in the tempo of life today—casting a magic spell of light where needed—yet subtly designed to form an integral part of the interior. Throughout the land, where excellence in lighting is a dominant note in all types of buildings and for many purposes, Caldwell Fixtures are to be found—fully justifying a reputation born more than 50 years ago.

Caldwell
A GREAT NAME IN LIGHTING

EDWD. F. CALDWELL & CO., INC. • 101 PARK AVE., NEW YORK 17, N. Y.

Where is the Radiator?

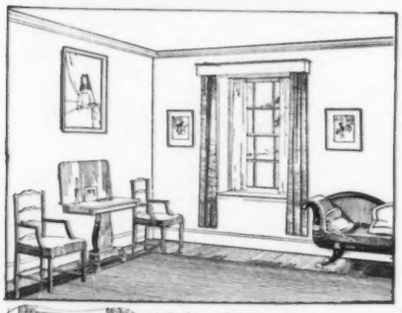



Make this test: Cut out illustration of radiator. Place cut-out picture in position under window in living room above. See how presence of radiator in room interrupts whole scheme of decoration and cuts down usable floor space.

Webster Baseboard Heating will take the radiator "out of the picture" in your home of tomorrow. In this patented new development the heating element fits behind a specially built metal baseboard. Air goes in at floor line, passes over heating element, is warmed and comes out of slots at top of baseboard—constant, even circulation, with temperatures varying less than 2° F. from floor to ceiling.

The heating element is a copper tube with copper fins, running in a continuous loop around the exposed walls of the house—a separate loop for each floor. Results: less material, less labor—yet all advantages claimed for forced hot water, *plus* radiant effect from warmed baseboard and walls, *plus* natural convected air movement essential to comfort with radiant heating. Webster Baseboard Heating is now being installed in a limited number of new and existing homes



A 16-page book, "Where is the Radiator", is yours for the asking. Shows interiors in full color designed by a leading architect in collaboration with a noted interior decorator. Show this book to your clients and you will soon be writing for extra copies.

Address Department AR-12

WARREN WEBSTER & CO., Camden, N. J.
Representatives in principal U. S. Cities : : Est. 1888
In Canada: Darling Brothers, Limited, Montreal

Webster

BASEBOARD HEATING

—a post-war development by makers of Webster Systems of Steam Heating

THE RECORD REPORTS

(*Continued from page 138*)

lowing officers for the coming year: *president*, Raymond Loewy; *vice president*, Harold Van Doren; *secretary*, Egmont Arens; *treasurer*, Ray Patten.

BUILDING NOTES

New Store

Recently opened in Sacramento, Calif., the Joseph Magnin store was designed in accordance with the expressed desires of 50,000 women who answered a questionnaire sent out by Mr. Magnin.

One of the first considerations in planning the store, Gruen and Krummeck, the architects, report, was to make window shopping as agreeable and comfortable as possible. The plans, therefore, were drawn to create a shaped area setting the windows back behind a row of columns and making it possible for window shoppers to look at the merchandise in the shade.

Another feature is the use of aluminum venetian blinds which extend all the way around the arcade and go up and down automatically when the sun hits them.

The store, the largest women's apparel shop between San Francisco and Omaha, is windowless, has two floors and a mezzanine. The first floor, 17 ft. high, is a rounded oblong shaped room, in the center of which is suspended a massive lighting cove supported by two pillars. The two main counters, designed to give the appearance of growing out of the floor, are done in bronze.

Public Works Program

The New York State Postwar Public Works Planning Commission has approved more than $6.5 million of new construction for Harlem Valley State Hospital at Wingdale. The projects include a medical and surgical building, a building for disturbed patients, an addition to the power plant, and six staff residences.

Also approved by the Commission are four new structures, estimated to cost $6,193,450, for the College of Agriculture at Cornell University. Plans are now being prepared by Cornelius J. White for a library and classroom building, and by Coffin and Coffin for an agricultural engineering building. Also projected are an agronomy and an entomology building.

Seven additional projects for the extensive program of expansion at the Long Island Agricultural and Technical Institute, Farmingdale, also have been approved. Included are a combined auditorium and gymnasium and an industrial and technical building.

(*Continued on page 142*)

HILLYARD

GYM FINISH

12th YEAR ON FAMOUS

MADISON SQUARE GARDEN FLOOR

The Championship Finish
for
Championship Teams

We know of no other type of floor that receives any harder wear than Gym Floors! Hillyard's GYM FINISH is protecting the surface of thousands of gym floors in Colleges, Universities and Schools in all parts of the nation. Many leading architects have been specifying Hillyard's GYM FINISH for years. Write us today for new literature, entirely free . . . no obligation.

HILLYARD SPECIFICATION CARDS

See Hillyard Specifications in Sweets 1946 Catalog. Sec. 13 Pages 13G-2

Send for Specification Cards. FREE for the asking.

THE HILLYARD COMPANY

DISTRIBUTORS

Hillyard Chemical Co., St. Joseph, Mo.

370 TURK ST., SAN FRANCISCO, CALIF.
1940 BROADWAY, NEW YORK, N. Y.

Time-Saver Standards

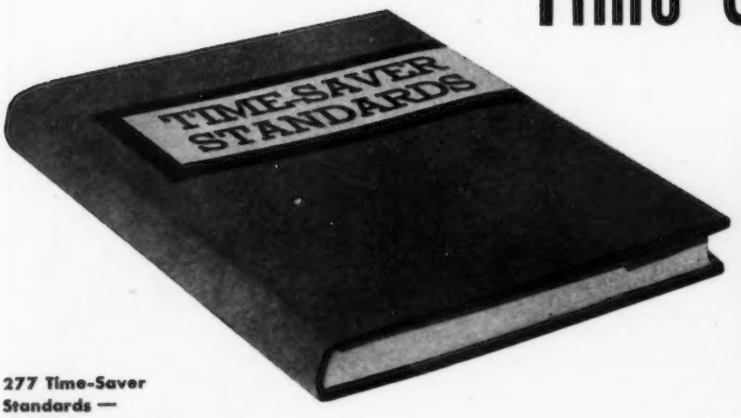

277 Time-Saver Standards —
656 Pages
12-Page Master Index
Size 8½ x 11
More than 1,000 illustrations, charts, diagrams

Now available in a single volume!

"Architectural Record's" 10-year Collection of Architectural and Engineering Standards.

These telescopic outlines of only a very few of the 277 Standards give a quick idea of the detailed treatment accorded each subject.

Dry-wall Construction Materials applicable. Fiber board. Fiber insulation board. Planks and tileboards. Hardboard, Gypsum wallboard. Plywood. Cement asbestos. Plastics. Composite and self-supporting walls and partitions . . . Advantages. Handicaps. Costs. Terminology. Classifications and sizes. Framing and furring. Joints. Nailing and cementing. Flexible fasteners. Finishing. Simplified practices. Uses. Applications. References.

Heating — Unit Heaters. Typical Heat sources. Boiler capacity. Characteristics. Location. Selection data. Capacities. Controls. Fresh Air connections. Pipe connections. Louvres. Grilles. Deflectors.

Basement Waterproofing. Impermeability of concrete cracks and joints in masonry. Hydrostatic pressure. Recommended concrete mixtures. Effect of curing time on permeability. Integral and membrane methods. Plastic and iron coating. Cement-base coatings.

Folding Partitions. Center hung doors. Pair-operated doors. Pockets. Passage through closed partitions. Door construction and soundproofing. Rolling partitions. Folding fabric partition.

Lighting. Recommended levels of illumination. Fixtures for filament and mercury lamps. Luminaire spacing. Room index. Coefficients of illumination. Layout suggestions. Conformity with structural design. Computed values of illumination. Lumen output of lamps.

Noise Reduction Acoustical Materials. A rule-of-thumb answer to what noise coefficient to use. Special applications. Materials for plastic application. Costs. Appearance. Design. Fire resistance. Light reflection. Heat transmission. Lighting. Pre-cast materials. Effect of paint. Acoustical Units: Wood framing; metal suspension systems.

Here, for the first time in one encyclopedic volume, are virtually all the Time-Saver Standards ever published — 277 of them — reprinted exactly as they appeared in "Architectural Record" and "American Architect" during the past ten years — with one 12-page master index.

Now going to press, for delivery on December 16, is a giant volume of 656 pages containing a *complete* collection of these now famous authoritative monographs on technical aspects of construction dealing with

- *Architectural Design*
- *Engineering Data*
- *Materials Technology*
- *Building Practice*

Designed for the practical guidance and every-day use of architects, engineers, specification writers, and building technicians, "TIME-SAVER STANDARDS" will bring you a wealth of detailed information on design and building practice . . . carefully selected from the works of the nation's leading building designers and engineers.

A Treasurehouse of Ideas and Information

Experience shows that a single item in TIME-SAVER STANDARDS can well save thousands of dollars in economy construction . . . save many hours of *your* valuable time. Yet you can now place this concise and well-organized planning data at your command for less than $12 — if you act now.

Reserve Your Copy Now — And Save Money!

As of the date of publication, December 16, 1946, the regular price will be $12.00 — *provided there are any copies left unsold!*

But today you can take advantage of the pre-publication price of $9.50, a meaningless fraction of what this marvelous tool can be worth to you.

All you have to do is to fill in the accompanying coupon, now, while you have it in hand, attach your check for $9.50, and mail it today.

Then your copy of TIME-SAVER STANDARDS will be reserved and rushed to you upon publication on the basis of first-come, first-served. Orders received after December 16 cannot be accepted at this pre-publication price. So take no chances. Act now.

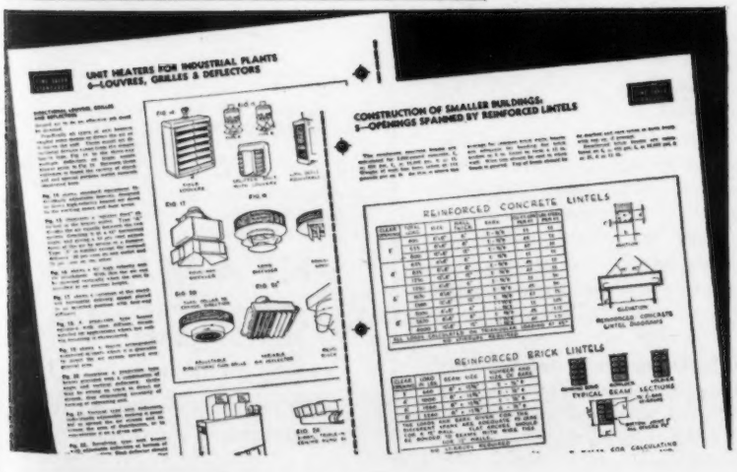

BOOK DEPARTMENT, ARCHITECTURAL RECORD
119 West 40th Street, New York 18, New York

Enter my advance order for_____copies of the new, complete, 656-page edition of "Time-Saver Standards" at the pre-publication price of $9.50* per copy. (Regular price $12.) I enclose payment of $_____

*Add 19 cents for New York City delivery—$9.69 in all.

12-46

*Name*_____

*Address*_____

*City*_____ *Zone*_____ *State*_____

Standard or Special *Acid-Proof* Pipe

Above are a few of many types of acid-proof pipe fittings regularly being made by Maurice Knight. Knight-Ware Acid-Proof Pipe with bell and spigot and flange type connections is made in standard and in special designs to meet unusual needs and installation conditions. Bore sizes range from one to 60".

Permanite Armored Knight-Ware Pipe is available where the pipe may be subjected to shock or physical damage.

Knight-Ware Acid-Proof Pipe is used in laboratories, commercial buildings and industrial plants. Since its entire body is acid-proof, not just the glaze alone, it is the ideal equipment for carrying corrosive liquids or gases.

MAURICE A. KNIGHT
87 Kelly Avenue
Akron 9, Ohio

KNIGHT-WARE
CHEMICAL EQUIPMENT

THE RECORD REPORTS

(*Continued from page 140*)

VA Hospitals

Army Engineers have awarded architect-engineer contracts for two more Veterans Administration hospitals: for a 200-bed general medical and surgical hospital at Tallahassee, Fla., to Steward and Skinner, and Maurice H. Connell and Associates, assisted by James E. Edmunds, Jr., hospital consultant; and for a 500-bed general medical and surgical hospital at Little Rock, Ark., to Brueggeman, Swaim and Allen, and Erhart, Eickenbaum and Rauch.

New Type of School

From the *Weekly Bulletin* of the Michigan Society of Architects comes a description of a new type of school construction: the Vernor School, designed for the Detroit Board of Education by Eberle M. Smith and Associates, for which a novel treatment of natural lighting was developed in consultation with Geo. Schulz of the Detroit Board of Education.

"The fenestration," reports the *Bulletin*, "consists of a solid mass of directional glass block above the eye level running the full width of the room. This glass block is supported on a structural frame of steel and reinforced concrete. This frame extends beyond the exterior face of the glass block and forms a protecting canopy over the clear glass in steel sash which provides the visible fenestration. This clear glass is from eye level down to sill height.

"The steel sash sets back from the exterior plane of the glass block to the rear plane of the masonry closing walls. This is done to take maximum advantage of the recess provided by the protecting canopy over the top of the steel sash.

"The directional glass block defleets the light from outside sources upward and these rays of light are again reflected downward from the light colored acoustical tile ceiling, allowing the light to penetrate to the corridor side of the classroom.

"As the glass block prevents the rays of light of the sun from entering directly into the classroom, no shades are necessary to prevent glare from the sun light. The protecting canopy over the clear glass below the glass block makes it unnecessary to provide shades on these sash, so, by this combination, the troublesome use of shades to control the light in classrooms will be done away with.

"The exterior columns are designed V-shaped so as to provide maximum of entrance of light into the classrooms and to allow for the uninterrupted panel of glass block across the face."

Unsurpassed Quality

CINCINNATI'S Carew Tower rates as one of the tallest skyscrapers in America . . . a magnificent building in which are housed a great hotel, several department stores, innumerable offices and a spacious arcade.

The miles of nickel silver and bronze work were handcrafted by NEWMAN.

• • •

Truly a tribute to the architect, Walter W. Ahlschlager, the matchless craftsmanship of NEWMAN serves to enhance the splendor and imperishable beauty of this edifice.

Ornamental bronze, aluminum, nickel, silver and stainless steel **Doors • Entrances • Bank Fixtures • Gates • Grilles • Railings**

FREE • **FILE DATA**

TODAY . . . write us for comprehensive catalogs and other helpful literature. Estimates and details, without obligation.

NEWMAN BROTHERS, *Inc.*

"64 Years Young"

708 W. Fourth Street
Cincinnati 3, Ohio

Adaptability unlimited

The outstanding advantage of Medusa White as a building material is its almost unlimited adaptability. Here's a material, pure white in color, that can be tinted with pigments or colored aggregates to any shade desired—that can be shaped to any given profile.

TERRAZZO . . . By using marble chips in many color combinations, and tinting the matrix with any color of the rainbow, you can produce unlimited color combinations.

CAST SLAB . . . Because Medusa White is a plastic material, it can be cast to suitable slabs. Because of its unstaining white color it can be tinted to any given shade and, of course, combined with any color aggregate.

CAST STONE . . . Here's another place where Medusa White's color and plasticity lends itself to the most intricate sculpturing in white or color.

STUCCO . . . Again Medusa White's color and plasticity enables architects to use unlimited color and finish applications.

Specify Medusa White (plain or waterproofed) . . . 38 years of long service proves this product to be outstanding for its unlimited adaptability.

MEDUSA PORTLAND CEMENT CO.
1015 Midland Building, Dept. "E" • Cleveland 15, Ohio
"FIFTY-FOUR YEARS OF CONCRETE PROGRESS"

MEDUSA *white* PORTLAND CEMENT

Get this book for A. I. A. File 14-K

"ANCHOR PROTECTIVE FENCES" is both a catalog and a specification manual. Shows many types and uses of Anchor Chain Link Fence . . . pictures installations for many prominent companies and institutions . . . contains structural diagrams and specification tables.

Also shows important and exclusive Anchor features: *Deep-Driven Anchors*, which hold the fence permanently erect and in line in any soil; *Square Frame Gates*, amazingly free from sagging and warping; *Square Terminal Posts* and *U-Bar Line Posts*, which increase strength and durability.

Just ask for Book No. 110. You'll find it useful and informative. We'll be glad to send a free copy. Address: ANCHOR POST FENCE DIVISION, Anchor Post Products, Inc., 6600 Eastern Ave., Baltimore 24, Md.

Anchor Fence

Nationwide Sales and Erecting Service

ARCHITECTURAL ENGINEERING

TECHNICAL NEWS AND RESEARCH

(*Continued from page 120*)

WIRE, ROD, STRIP

Alloys: Monel, Nickel and Inconel Wire, Rod and Strip (Catalog D-2). Characteristics of the various alloys, applications and qualities, tables of tensile strength, engineering data, size and weight tables. 28 pp., illus. Alloy Metal Wire Co., Inc., Prospect Park, Penn.

WIRE STRINGING

Engineering Memos: Successful Wire Pre-Stretching and Stringing. Instructions for wire-stretching and stringing. Diagrams, engineering information. 2 pp., illus. W. C. Dillon & Co., Inc., 5410 W. Harrison St., Chicago 44, Ill.

WIRES AND CABLES

Okobestos: "The Cable with the Asbestos Suit." Bulletin describing the principal types of Okobestos heat and corrosion resistant wires and cables. Includes detailed construction information, recommendations for type selection. Tables of allowable current-carrying capacities of conductors. 8 pp., illus. The Okonite Co., Passaic, N. J.

LITERATURE REQUESTED

The following individuals and firms request manufacturers' literature:

Leonard Bennett, Architect, Padre Sierra a Muñoz No. 26, Oficina. 6, Apartado de Correos No. 1.893, Caracas, Venezuela.

George D. Booth, draftsman, 1007 9th Ave., Laurel, Miss.

Building Materials Research, Council for Scientific and Industrial Research, Graham Rd., Highett, S.21, Victoria, Australia.

Dept. of Architecture, University of British Columbia, Vancouver, B. C.

Fair Lumber Co., Contracting and Materials, 170 Conrad St., San Antonio 3, Texas.

Kenneth Harry Hess, Architect, 32 S. Oak St., Ventura, Calif.

Thomas Larrick, Professor of Architecture, School of Architecture and Allied Arts, University of Florida, Gainesville, Fla.

Andre Merle Associates, Architectural Engineers, Southern Bldg., Washington 5, D. C.

Construction Manager, Nugents National Stores Inc., 370 W. 35th St., New York 1, N. Y.

Alves D. O'Keefe, Architect and Consulting Engineer, 401 E. Jefferson St., Plymouth, Ind.

Harner B. Scott, draftsman, 10 S. Laura St., Jacksonville, Fla.

I Was "Educated" On Cast Iron Years Ago!

SCHOOL EXECUTIVES, in a uniquely favorable position to compare operating costs of different type boilers, usually express a strong preference for cast iron. There are strong reasons . . .

Cast-iron boilers last longer. Their cost per year of service is lower because they resist rust and corrosion. They are sectional . . . easy to install. They are highly efficient, and readily adaptable to all fuels and fuel-burning methods.

Long-term comparative studies of operating costs have proved the superiority of H. B. Smith Cast-Iron Boilers. Recognition of this leadership extends into the commercial, industrial, institutional and residential fields. Write today for your free catalog.

Visit the H. B. Smith exhibit at the International Heating and Ventilating Exposition in Cleveland

H.B. Smith

CAST-IRON BOILERS

THE H. B. SMITH CO., INC.

WESTFIELD, MASSACHUSETTS

Offices and Representatives in Principal Cities

Yes . . . Modern Industrial Buildings need BOTH Process and Atmospheric Dust Control

TYPE "D" ROTO-CLONE—original Dynamic Precipitator for dry collection of granular process dusts.

TYPE "N" ROTO-CLONE—Hydro-Static Dust Precipitator for wet collection of linty, explosive, or cementitious sticky dusts.

Designers of modern industrial buildings must deal with two distinct dust problems—one created by **atmospheric dust,** which must be eliminated from the air used for heating or ventilating, and **process dust** produced by manufacturing operations which must be controlled at its source.

Air filters are used for the collection of **atmospheric dust,** and the American Air Filter Company offers a wide selection to meet all requirements. The Roto-Clone dust precipitator is furnished in several types for **process dust** control. This equipment is widely used by industrial plants throughout the nation.

If you have an air cleaning problem, AAF engineers thoroughly experienced in every aspect of industrial dust control are available without obligation to study your problem and recommend a solution. Consult your phone directory for the AAF engineering office nearest you.

Free Engineering Bulletins covering the operation and application of each AAF dust control unit are available — send for them today.



ELECTRO-MATIC—self cleaning automatic Electronic Precipitator.



ELECTRO-AIRMAT—dry type Electronic Precipitator.



MULTI-DUTY—completely Automatic self-cleaning mechanical air filter.

See AAF EQUIPMENT at the A·S·H·V·E Show

AAF

AMERICAN AIR FILTER CO., INC.

389 CENTRAL AVE., LOUISVILLE 8, KENTUCKY

In Canada: Darling Bros., Ltd., Montreal, P. Q.

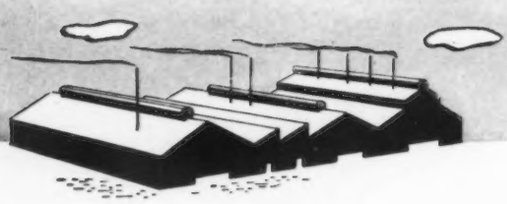

Industrial Building Ventilation

There is a vital relationship between the *type* and *volume* of *ventilation* you design into your buildings and the *production* attained by the owner after operations are started. This relationship is too often ignored or underestimated. Improper ventilation—or lack of ventilation—in an industrial building can be very costly in slowing down production and impairing the quality of the product; while *proper* ventilation can lower costs while stepping up production and maintaining highest quality standards. Where excessive heat, smoke, and fumes are present they must be exhausted from the building *quickly* and *efficiently*—without "lag"—but building comfort in cold weather should not be impaired.

That is why it is to your advantage to have the expert advice of experienced engineers in determining the solution to your ventilation problems; and also why the latest design Industrial Ventilator will prove most advantageous and economical for your buildings.

Plasteel Air Controls combine the advantages of past designs with unique exclusive features heretofore unavailable. They "do the job"—when, where, and as you want it done. There is a design for each specific purpose. Plasteel Engineers are available to apply a wealth of past experience and unusual knowledge of building air movements to your problems. Write, wire, or phone today.

PLASTEEL AIR CONTROLS

Ridge Ventilator

The modern design with exclusive features. Provides highest efficiency with utmost economy. Contains no exhaust retarding braces, baffles, or other framework. Air flow is streamlined and full exhaust is obtained regardless of weather conditions. May be dampered partially or fully with slight pull of damper chain and opened likewise. Made of PLASTEEL—it's permanent—never needs painting, and it is extremely easy to erect on any type building. Made in sizes to 24-inch throat—other designs to 72-inch throats. Let us show you its exclusive features.

PROTECTED STEEL PRODUCTS

General Office and Plant • Washington, Pennsylvania

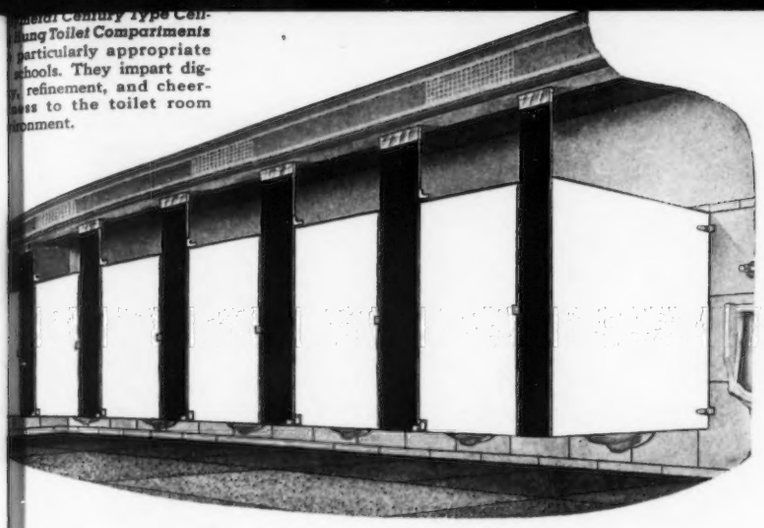

...ung Toilet Compartments particularly appropriate schools. They impart dig-, refinement, and cheer-ess to the toilet room ronment.

*Sanymetal**

*Trade Mark Reg. U. S. Pat. Off.

"PORCENA"

(Porcelain on Steel)

TOILET COMPARTMENTS, SHOWER STALLS AND DRESSING ROOMS

...metal Porcena Partitions ...d Pilasters, as used for in-...llation in employees' shower ...m of a large steel company.

...Another Place Your Industrial Clients Can Reduce NON-PRODUCTIVE TIME COSTS!

Dirty, depressing, unsanitary toilet facilities slow down production, tend to increase scrap, and cause irritation, resentment and discomfort among employees. Time-wasted loafing on account of inadequate and remotely located toilets can be lessened considerably. This is no time to skimp on toilet and wash room facilities.

Toilet compartments usually dominate a toilet room, influencing the environment. An installation of Sanymetal "PORCENA" Toilet Compartments fosters an appreciation of toilet and wash room conveniences and encourages orderliness and cleanliness. *Sanymetal offers several different types of toilet compartments suitable for different types of industrial buildings.* Sanymetal "PORCENA" Toilet Compartments are fabricated of the ageless and fadeless material, porcelain on steel, which is a glass-hard, stainless material that always looks new, does not absorb odors, is moisture- and rust-proof, and resists the corroding nature of ordinary acids. The glistening porcelain finish can be wiped clean as easily as any glass-smooth surface, effecting a reduction in maintenance costs.

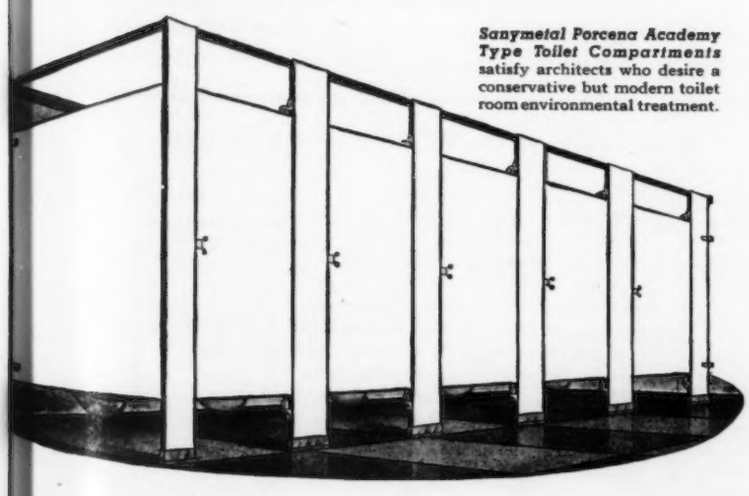

Sanymetal Porcena Academy Type Toilet Compartments satisfy architects who desire a conservative but modern toilet room environmental treatment.

Sanymetal "PORCENA" Toilet Compartments embody the results of over 33 years of specialized skill and experience in making over 80,000 toilet compartment installations. Ask the Sanymetal Representative in your vicinity (see "Partitions" in your phone book for local representative) for further information about planning suitable toilet room environments for industrial buildings. Refer to Sanymetal Catalog 19-B5 in Sweet's Architectural File for 1946, or write for file copy of Catalog 84.

THE SANYMETAL PRODUCTS CO., INC.

1689 Urbana Road • Cleveland 12, Ohio

*Sanymetal**

*Trade Mark Reg. U. S. Pat. Off.

...OILET COMPARTMENTS, ...HOWER STALLS AND DRESSING ROOMS

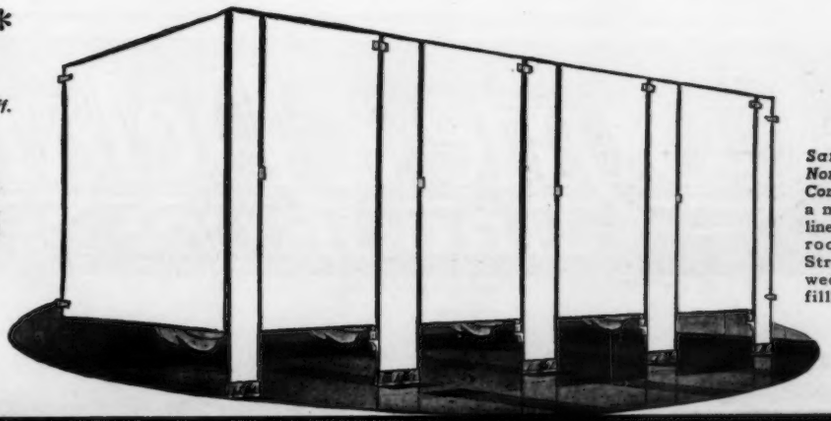

Sanymetal Porcena Normandie Type Toilet Compartments impart a moderately streamlined effect to a toilet room environment. Streamlined design wedded to utility fulfills all requirements.

Left, 24-hour growth of B typhosus.

Right, Bacillus Typhosus, the causative organism of Typhoid Fever.

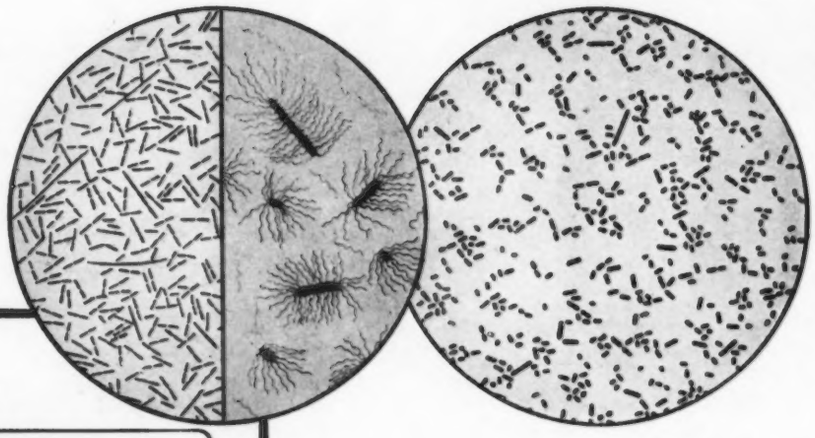

Bacillus Dysenteriae Shiga. Causes human dysentery. 24-hour culture.

But You CAN'T MAGNIFY the DANGER from WATER-BORNE GERMS

By installing an approved Vacuum Breaker, such as the DELANY No. 50 you prevent back-syphonage from entering into the water supply line, and STOP COMPLETELY one common source of possible contamination with probably transmission of water-borne diseases such as typhoid, dysentery, possibly polio.

The No. 50 DELANY VACUUM BREAKER meets the requirements of U. S. Bureau of Standards, and is FULLY APPROVED by most States and Municipalities.

The DELANY No. 50 VACUUM BREAKER is self policing —will function for years—will prevent back-syphonage under vacuum even though maliciously or mischievously sabotaged—has only one moving part—practically invisible when installed.

STOP THIS / WITH THIS

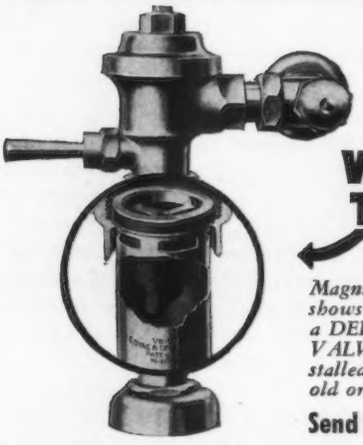

Magnified cutaway view shows No. 50 installed in a DELANY FLUSHBOY VALVE — it can be installed on ANY make of old or new flushometer.

Send for Valuable Facts

EXCLUSIVE FEATURES OF THE DELANY NO. 50 VACUUM BREAKER



SIMPLEST ASSEMBLY —ONLY ONE MOVING PART

PRACTICALLY INVISIBLE WHEN INSTALLED



Drawings show cross section of the No. 50 in operation. The unit, upon application of flow, expands the rubber sleeve, seals off the air vents and permits the proper flushing of the fixture.

Under the weakest vacuum, the rubber sleeve of the No. 50 collapses inwardly, seals and breaks the vacuum. This instantly prevents the slightest back-syphonage.



SINCE 1879

Coyne & Delany Co.

BROOKLYN N.Y.

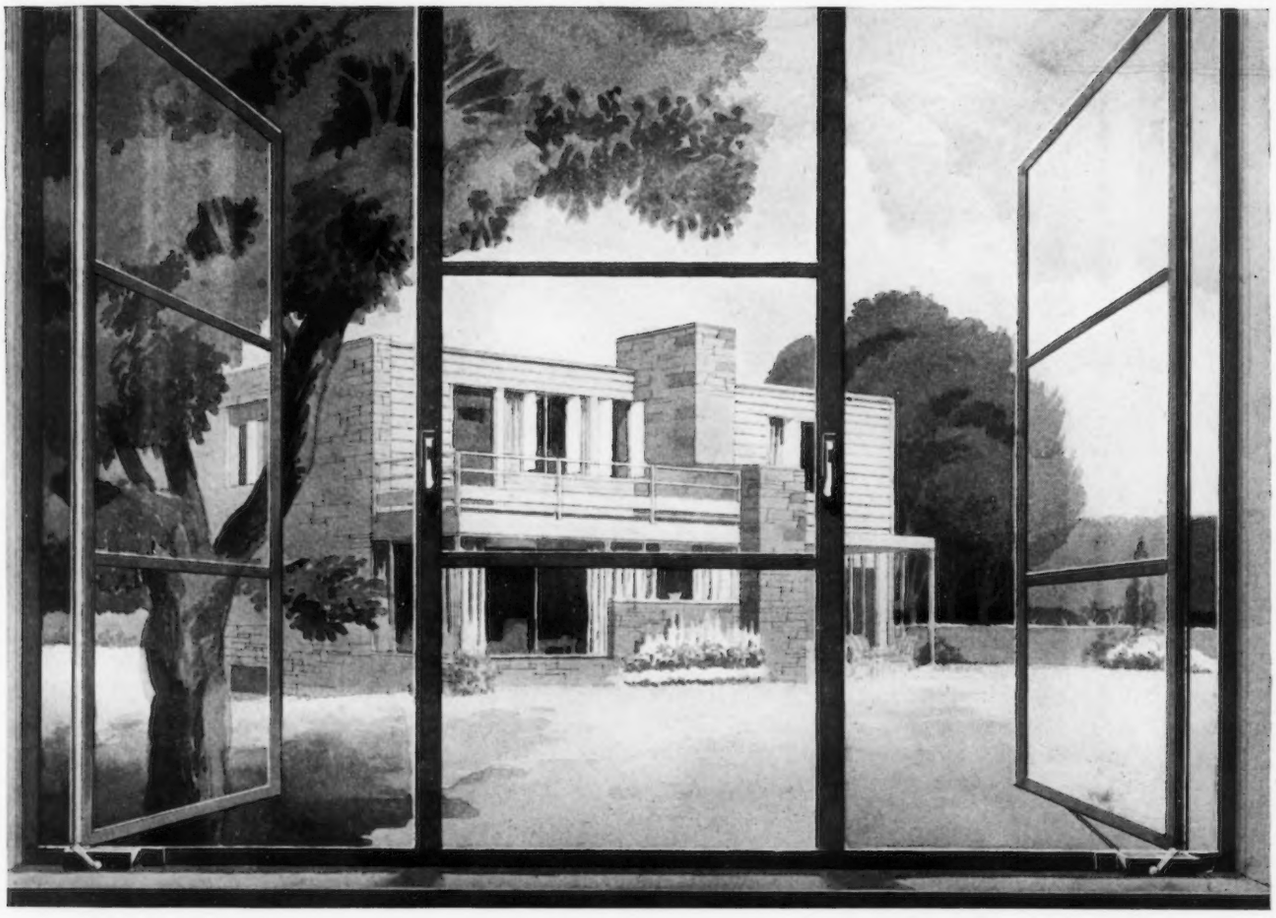

House in Melrose Park, Pa. Architect, Louis I. Kahn. Builder, Master Masons Construction Co.

Built on a wooded slope in a lovely Philadelphia suburb, this two-story home is an example of gracious living in the modern manner. Lupton Steel Casements are used to good advantage to achieve pleasing daylight distribution and natural ventilation. Trouble-free operation, low-cost installation and attractive hardware add to their desirability for the modest home as well as the imposing residence. Lupton Casements are complete units available with sturdy, effective screening. Write for the new 1946 Catalog or see our Catalog in Sweet's.

MICHAEL FLYNN MANUFACTURING CO.
E. Allegheny Avenue at Tulip Street, Philadelphia 34, Pa.

LUPTON
METAL WINDOWS

MOVABLE ASBESTOS WALLS

The keystone of flexibility in Unit Construction is the J-M Transite Asbestos Wall. Can be disassembled and relocated as often as needs require, without waste . . . with little or no inconvenience. Made of fireproof asbestos and cement, practically indestructible materials, the movable panels form rigid, double-faced partitions, 4" thick. Can also be used as interior finish of the outside walls. Removable Transite panels permit ready access to wiring, etc.

ACOUSTICAL CEILING

Helping to overcome the ha cap of distracting noise, Acoustical Ceilings provi quieter and more pleasant atmosphere . . . reduce fa and nervousness . . . and thu beneficial to health and wo efficiency. Demountable uni easy to clean, have high coefficients of sound-absor and light-reflection. An exclusive J-M patented cons tion system permits interchangeability of flush-type rescent lighting and acoustical ceiling units.

Now, Executive Offices can be flexible, too!

Johns-Manville System of Unit Construction—Walls, Ceilings, Floors—provides flexibility as well as architectural beauty. Now you can enlarge, decrease, or rearrange office areas whenever needs require!

WHETHER you're thinking of a private executive office, a suite of offices, or an entire office building, Johns-Manville offers you a completely new and practical method of interior construction which has the combined advantages of flexibility, greater comfort, and attractive appearance.

Unit Construction meets the problem of ever-changing business needs. You can now provide for endless revisions of space-use—*at low cost*. Three Johns-Manville materials are united to form Unit Construction:

1. **Movable Asbestos Walls** . . . readily assembled . . . interchangeable . . . 100% salvageable. Made of asbestos-cement Transite panels, they combine all the qualities of permanent construction. And they are hard to mar, easily cleaned—advantages that make a big difference in the maintenance budget.
2. **Acoustical Ceilings** . . . attractive . . . demountable . . . reduce distracting noise. Units can be taken down and relocated as desired.
3. **Colorful, Resilient Floors** . . . quiet underfoot. Small units permit easy extension of floor pattern.

This executive office is part of a complete building interior, using J-M Unit Construction throughout. Structurally flexible, it can easily be taken down and re-erected to meet changing business needs—yet it has all the qualities of solid, permanent construction.

The constituent parts of J-M Unit Construction are *built to last*. And they're so easy to keep clean that they bring maintenance costs way down.

Moreover, this proved method of construction makes the whole interior—walls, ceilings, floors—available under *one* specification, *one* manufacturer's responsibility.

Write for colorful brochure, showing many uses of this important development. Johns-Manville, P. O. Box 290, New York 16, N. Y.

COLORFUL, RESILIENT FLOORING

J-M Asphalt Tile Flooring completes the Unit Construction System. Made of asbestos and asphalt, the units withstand hard wear and give long years of service. Even a carelessly dropped cigarette will not mar their built-in beauty. Not only durable, J-M Asphalt Tile Floors are pleasantly comfortable and quiet underfoot. Individual units permit easy alterations or extension of patterns. Made in a wide variety of plain and marbleized colors.

JOHNS-MANVILLE JM PRODUCTS

Johns-Manville Unit Construction

- **ASPHALT TILE FLOORS**
- **MOVABLE TRANSITE WALLS**
- **ACOUSTICAL CEILINGS**

"Thine alabaster cities gleam"

In *all* the world, *only* in America can be found so great and shining cities.

They are, in one, both the symbol and the accomplishment of our aspirations. They are, in a way, America. Ask a couple of million returned GIs!

If beyond our alabaster cities we sense the roar of mighty machinery, the belching stacks of industry, the skill and sweat of human beings . . . they obscure not at all the handiwork. For in America we know that not alone with ideals, but with the "sterner stuff" of toil and resources shall a nation be moulded at last.

So, some practical dreamer it was, who watched the first *steel pipe* clank from the grimy benches about sixty years ago. Who, in shaping the hot metal, gave form and substance to fair cities yet to arise . . . cities that became realities because these *arteries* of steel could convey water, oil and other essential fluids, gas, steam and even some forms of solids, over long distances and to great heights.

Actually, the achievement of the modern city directly parallels the development and plentiful production of reliable, economically adaptable *steel pipe.* Yes, *steel pipe makes it possible!*

The interesting story of "Pipe in American Life" will be sent upon request.

Committee on Steel Pipe Research
OF
AMERICAN IRON AND STEEL INSTITUTE
350 FIFTH AVENUE, NEW YORK 1, N. Y.

STEEL PIPE MAKES IT POSSIBLE!

. . . better living through pipes of steel for plumbing and heating purposes.

LOOKING for a way to get every last inch of space out of a housing project or an office or apartment building? Here's how the architects who designed New York's 295 Central Park West Apartments did it! By using the Gold Bond 2″ Solid Partition System with its special adjustable metal base for simple speedy construction, *the actual rentable space was increased 7%!* The resulting walls, built entirely of metal lath and gypsum plaster, are fireproof, durable, and effectively cut down room-to-room noise. All component parts are Gold Bond Products, designed and precision-made for speedy efficient assembly on the job. You'll find drawings and specifications of the system in our section of Sweet's.

Descriptive book with full details will be sent gratis upon request. Please specify Form 1080.

NATIONAL GYPSUM COMPANY · BUFFALO 2, N. Y.

Over 150 Gold Bond Building Products including gypsum lath, plaster, lime, gypsum sheathing, rock wool insulation, metal lath products and partition systems, wall paint and acoustical materials.

ENTERPRISE Oil Burners *Specified* . . .

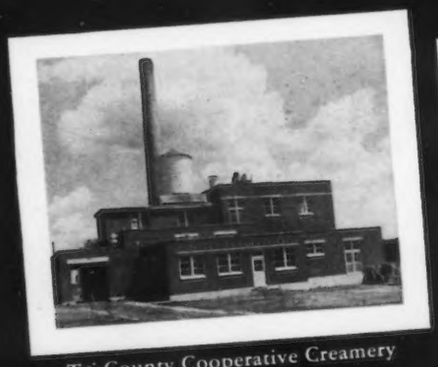

Tri-County Cooperative Creamery

Minnesota Valley Milk Plant

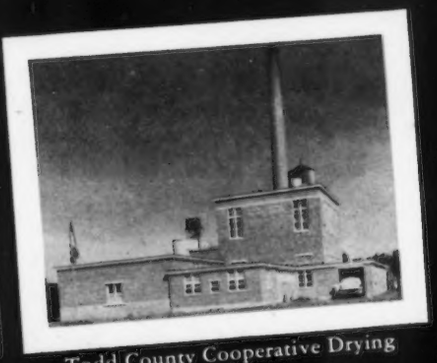

Todd County Cooperative Drying Association

Installed by Grudem Brothers Co., 2645 University Ave., St. Paul, Minn.



ENTERPRISE Burners

Are furnished in Manual, Semi-Automatic and Fully-Automatic Models in combination with modulating fire control or special combinations to meet your specific requirements.

ENTERPRISE Standardizes on V-Belt Drive

V-Belt Drive permits the use of standard motors, which can be selected or easily changed to meet varying current requirements. Smooth, silent starting with cold, heavy fuel oils adds years to the life of the motor and burner alike.



. . . FOR MODERN DRIED MILK PLANTS!

Cooperatives and Independents choose the Burner with a reputation for a long life of efficient, economical service.

Dried Milk Plants impose extremely severe demands on fuel firing equipment. In meeting these requirements lies the reason why Enterprise Oil Burners have proved so highly successful. They follow varying steam demands with close accuracy–stepping up to handle maximum overload from boilers, then dropping back to normal when the pasteurizing and processing of each run of milk is completed. Too, they adapt themselves to basic minimum loads required for daily clean-up operations. In many plants they operate around-the-clock, 24 hours a day, providing high-pressure steam for generation of electricity, while the exhaust is utilized to operate air dryers employed in certain milk processes. Cleanliness is one of their most important added factors. Considerable savings in fuel, time and maintenance costs effect continuing economy of operation.

OUR SIXTIETH YEAR • 1886 - 1946

COMBUSTION EQUIPMENT DIVISION OF

ENTERPRISE

ENGINE AND FOUNDRY CO.

SAN FRANCISCO 10, CALIFORNIA

DISTRIBUTORS IN PRINCIPAL CITIES

DIESEL ENGINES • PROCESS MACHINERY • OIL BURNERS • HEAVY MACHINERY

YOU are invited to examine this book *Free!*

- ★ General Characteristics of Design for Welded Construction
- ★ Types of Welds and Joints, and Weld Sizes, Arrangement of Details
- ★ Specifications for Welded Buildings, Bridges and Similar Structures
- ★ Proportioning Welds for Allowable Stresses in Building Construction
- ★ Economical Weld Sizes and Groove Forms
- ★ Diagrams for the Rapid Determination of Allowable Eccentric Loads on Welded Connections
- ★ Standardized Welded Connections for Simple Framing and Tables of Allowable Loads on Beams and Piece Marks for Welded Connections
- ★ Estimating Electrode Requirements, Weight of Deposited Metal, and Cost Factors

Here is the first book of its kind ever published — the "Manual of Design for Arc Welded Steel Structures." It is handy, useful, bringing you a wealth of information covering design, materials, inspection, estimating, and engineering control of welding and related operations . . . tables of standardized welded connections for all sizes of beams . . . AND a series of diagrams for the rapid design of special connections.

These few chapter headings give you some idea of the vast amount of material covered by this definitive 300-page work:

But see the book for yourself . . . simply send us your check or money order for $2 — look the book over for five days; then, at the end of this period, if the book does not meet your requirements, just return the book to us, and we will refund your money.

MAIL THE COUPON TODAY

AIR REDUCTION, 60 East 42nd Street, New York 17, N. Y.
Dept. 24AR

Send us a copy of "Manual of Design for Arc Welded Steel Structures." We have attached the $2 charge, which will be refunded to us (when we return the book to you) if the book does not meet our requirements.

NAME _____

FIRM _____

ADDRESS _____

CITY _____ STATE _____

AIRCO

AIR REDUCTION

Offices in All Principal Cities

Headquarters for Oxygen, Acetylene and Other Gases . . . Carbide . . . Gas Welding and Cutting Apparatus and Supplies . . . Arc Welders, Electrodes and Accessories

These Grade Trademarks Are Your Insurance of Quality

EXT.-D.F.P.A.

EXTERIOR-TYPE plywood is made with completely waterproof synthetic resin binder especially for permanent exposure to weather and water. It is widely used for building exteriors, for outdoor signs, for railroad car siding, and in all phases of marine construction.

GENUINE -PLYSCORD- SHEATHING D. F. P. A. INSPECTED

PLYSCORD is an unsanded utility panel of unusual rigidity, made to withstand the rigorous service demanded of wall and roof sheathing and of sub-flooring.

GENUINE PLYWALL Douglas Fir Plywood WALLBOARD D. F. P. A. INSPECTED

PLYWALL is the grade of interior-type plywood made for use where only one side is exposed, as in wall paneling. It is suitable for most stained finishes, for painting or papering.

GENUINE DOUGLAS FIR PLYFORM Concrete Form Panel D. F. P. A. INSPECTED

PLYFORM is the special concrete-form grade of Douglas fir plywood — a quality grade manufactured with highly water-resistant glues and intended for multiple re-use in form construction.

PLYPANEL D.F.P.A.

PLYPANEL is the grade of interior-type plywood made especially for high quality interior work on walls, ceilings, for booth partitions, cabinet doors and similar uses.

Douglas Fir Plywood is Helping in the Construction of Houses for Veterans

Durable Douglas fir plywood—the engineered wood which cuts building time and costs—is now helping speed thousands of veterans' homes. A substantial portion of the industry's current production is allocated, on government order, to the Reconversion Housing Program.

Naturally, this means a tight supply situation for housing which does not come under the program, and for all other construction and industrial uses.

It is a fact, however, that more Douglas fir plywood is being produced today than in pre-war years. When the present overwhelming need for housing has been met, more and more of this modern "miracle wood" will become available for general use. Anticipate your needs well in advance. Keep in touch with your regular source of supply. Plywood's many advantages are worth the wait!

DOUGLAS FIR

DOUGLAS FIR PLYWOOD LARGE. LIGHT. STRONG. Real Wood PANELS

PLYWOOD ASSOCIATION
Tacoma 2, Washington

Treasures that endure... and a roof to match

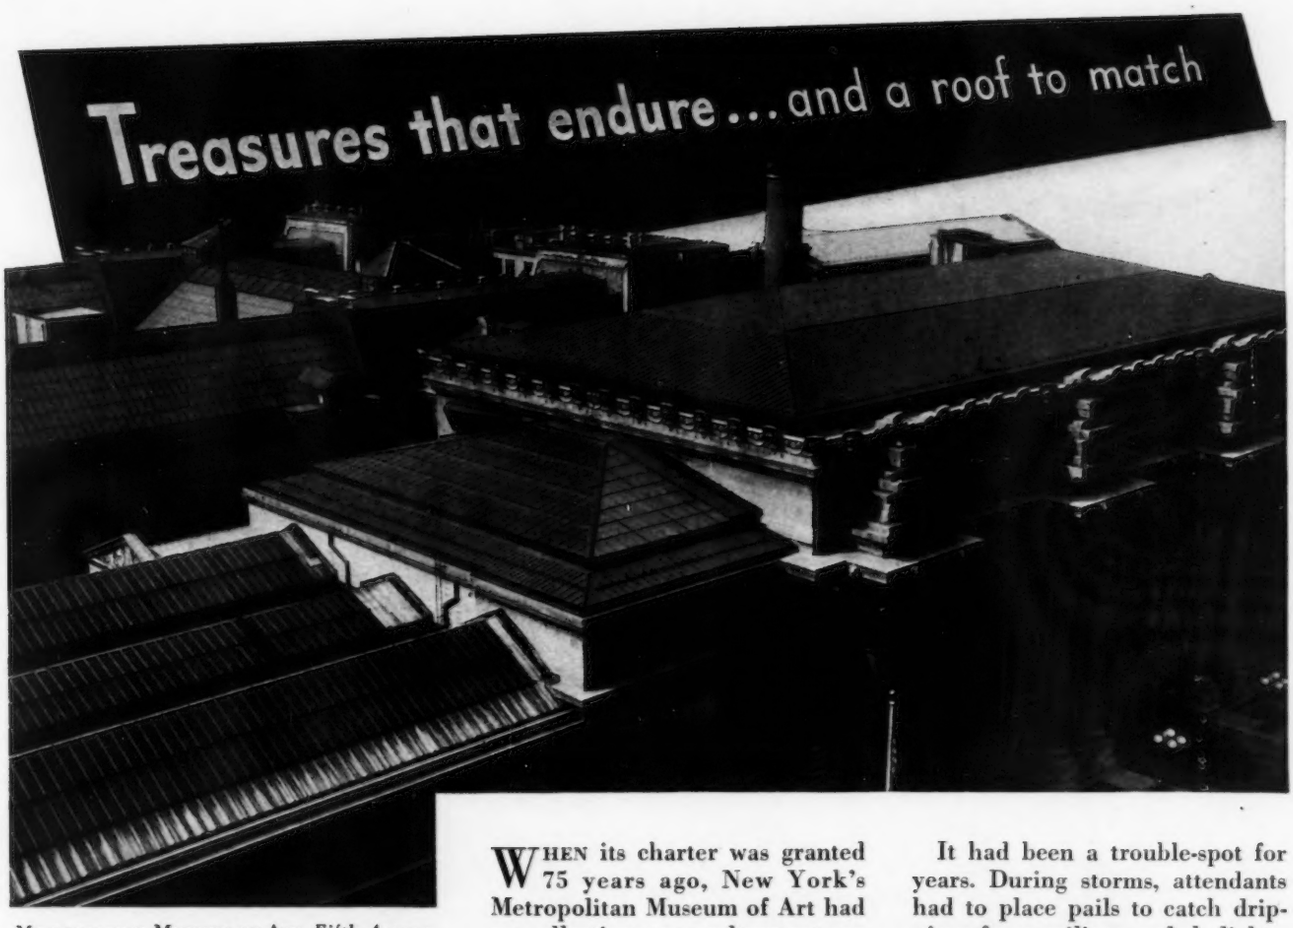

METROPOLITAN MUSEUM OF ART, *Fifth Avenue, New York, installed Monel roofing 10 years ago to protect its famous collections from leaks and seepage. The Museum now plans large-scale construction and remodeling in connection with its 75th Anniversary program.*

VIEW OF MONEL GUTTER *and section of standing seam roofing and flashing installed in 1936.*

WHEN its charter was granted 75 years ago, New York's Metropolitan Museum of Art had no collections, no endowment, no land and no buildings.

The Metropolitan is now celebrating its Diamond Jubilee — as one of the great treasure houses of the world.

Its galleries and store rooms cover nearly 14 acres of floor space, and contain approximately a million works of art reaching through five thousand years of history.

Still growing, the Museum plans extensive new construction and reconstruction, to be brought about by the successful completion of its Diamond Jubilee Campaign. They'll simplify and regroup collections. They'll add new buildings, and completely modernize present facilities.

Naturally, for roof renovation and new construction, the Metropolitan will give special consideration to Monel*, the durable Nickel Alloy which they first used in 1936 to replace the Museum's old, faulty roof.

It had been a trouble-spot for years. During storms, attendants had to place pails to catch drippings from ceilings and skylights. Leakage endangered many priceless collections.

That picture changed after the installation of 120,000 square feet of Monel standing seam roofing ... Monel gutters, conductors, skylights, frames, siding and flashing.

Monel is rustproof. It's stronger and tougher than any other nonferrous roofing. It resists corrosion caused by chemicals in city air; it withstands the corrosive atmospheres of industrial and coastal areas. Its low co-efficient of expansion and high endurance strength reduce the possibility of fatigue failure.

To The Metropolitan Museum of Art, the properties of Monel assure dependable protection, long roofing life and low maintenance expense. *And these are the benefits your clients, too, will have — when you specify Monel for roofing.*

*Reg. U. S. Pat. Off.

Monel

THE INTERNATIONAL NICKEL COMPANY, INC.

67 WALL STREET, NEW YORK 5, N. Y.

Contemporary ... *for years to come*

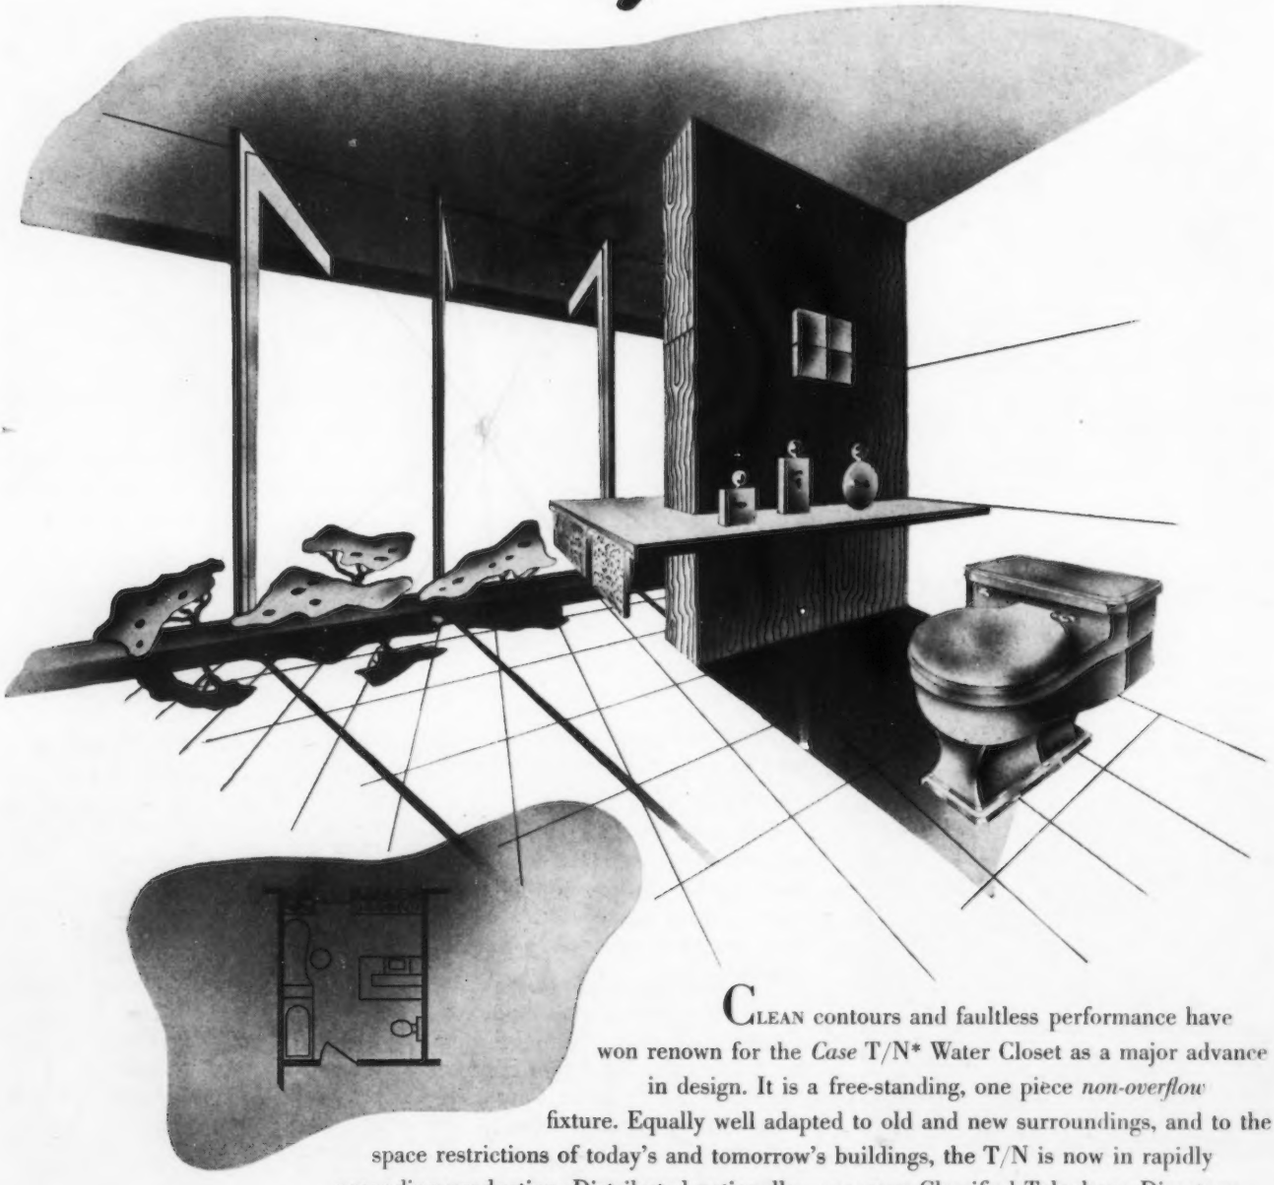

CLEAN contours and faultless performance have won renown for the *Case* T/N* Water Closet as a major advance in design. It is a free-standing, one piece *non-overflow* fixture. Equally well adapted to old and new surroundings, and to the space restrictions of today's and tomorrow's buildings, the T/N is now in rapidly expanding production. Distributed nationally—see your Classified Telephone Directory. W. A. Case & Son Mfg. Co., Buffalo 3, New York. Founded 1853.

*PATENTED

Foremost in demand ... the Case T/N

FOR HARD USAGE

...specify Mesker Heavy Duty Sash

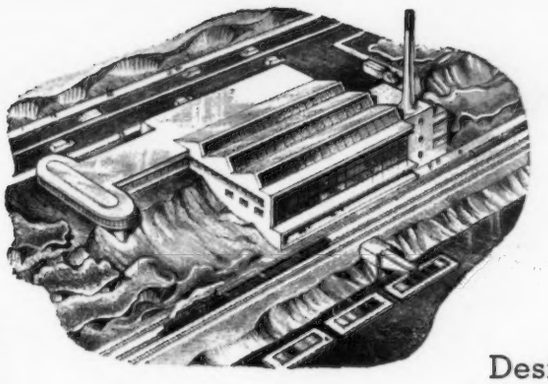

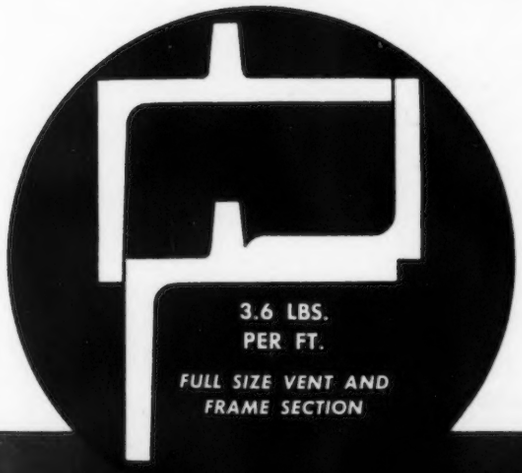

Designed for duty... that's the engineering principal behind Mesker Heavy Duty Windows! Built to weather overtime service in massive industrial and commercial structures, endurance has been tailored into their trim lines. At Mesker Brothers, perfection in window manufacture has been stressed since 1879. Here specialists have developed assembly, interlocking and welding techniques to assure window alignment and performance for the life of the building. For heavy duty window satisfaction, specify "Mesker Brothers".

MESKER
METAL WINDOWS



MAIL THIS COUPON ⇨ NOW!

MAIL THIS COUPON NOW!

MESKER BROS., Dept. AR126, 428 S. Seventh St., St. Louis 2, Mo.

Without cost or obligation, mail me the following:

- ☐ Book of Apartment Windows
- ☐ Book of School Windows
- ☐ Book of Hospital Windows
- ☐ Book of Windows for Homes
- ☐ Public Building Windows
- ☐ Office Building Windows
- ☐ Book of Industrial Windows

Architect_____

Address_____

City_____ Zone_____ State_____

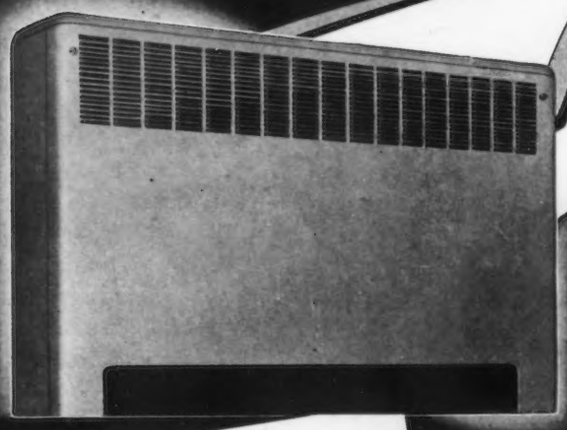

NOW..

TRANE STANDARDIZES
the Convector-radiator for Installation Direct from Stock

Here's what standard means

- 1 element for *both* steam and hot water.
- 1 cabinet style installed 2 ways.
- Sizes that fit most applications.

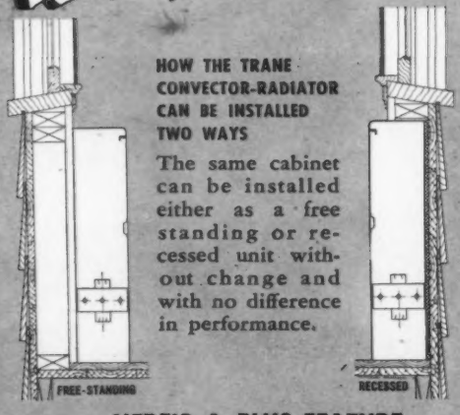

HOW THE TRANE CONVECTOR-RADIATOR CAN BE INSTALLED TWO WAYS

The same cabinet can be installed either as a free standing or recessed unit without change and with no difference in performance.

HERE'S A *PLUS* FEATURE



Dampers for the positive control of heat can be obtained and installed in two minutes without tools. Operated by an adjustable chain through the grill, these dampers give instant response without the use of valves.

For a complete description of the entire Trane Convector-radiator line, write for Bulletin DSB-380.

NEW MASS PRODUCED DESIGN FITS MOST HEATING APPLICATIONS

Here is the *standard* convection heating unit long demanded by architects, engineers, contractors, and wholesalers! In the new Type A design, Trane presents a Convector-radiator that operates equally well on steam or hot water—can be installed either free-standing or recessed—and is available in a range of sizes fitted to the needs of cottage, factory or skyscraper.

READY FOR INSTALLATION

Now, for the first time, Convector-radiators will be available from local wholesalers' stocks as a unit package completely assembled and ready for installation. Featuring Trane developments that reduce on-the-job time to a minimum, the new Type A units are mass produced for maximum economy—now cost no more to buy and less to install than old-fashioned radiators.

FOR THE UNUSUAL APPLICATION

Easy to specify, purchase, and install, Type A Convector-radiators are designed for the great majority of installations. However, for the unusual or special application, Trane still makes available the same extensive special purpose line that established Trane leadership in the convector field.

See your local wholesaler or nearest Trane field engineer for details of the new Type A Convector-radiator.

THE TRANE COMPANY
The House of Weather Magic
LA CROSSE • WISCONSIN
TRANE COMPANY OF CANADA, LTD., TORONTO
MANUFACTURING ENGINEERS OF HEATING AND AIR CONDITIONING EQUIPMENT

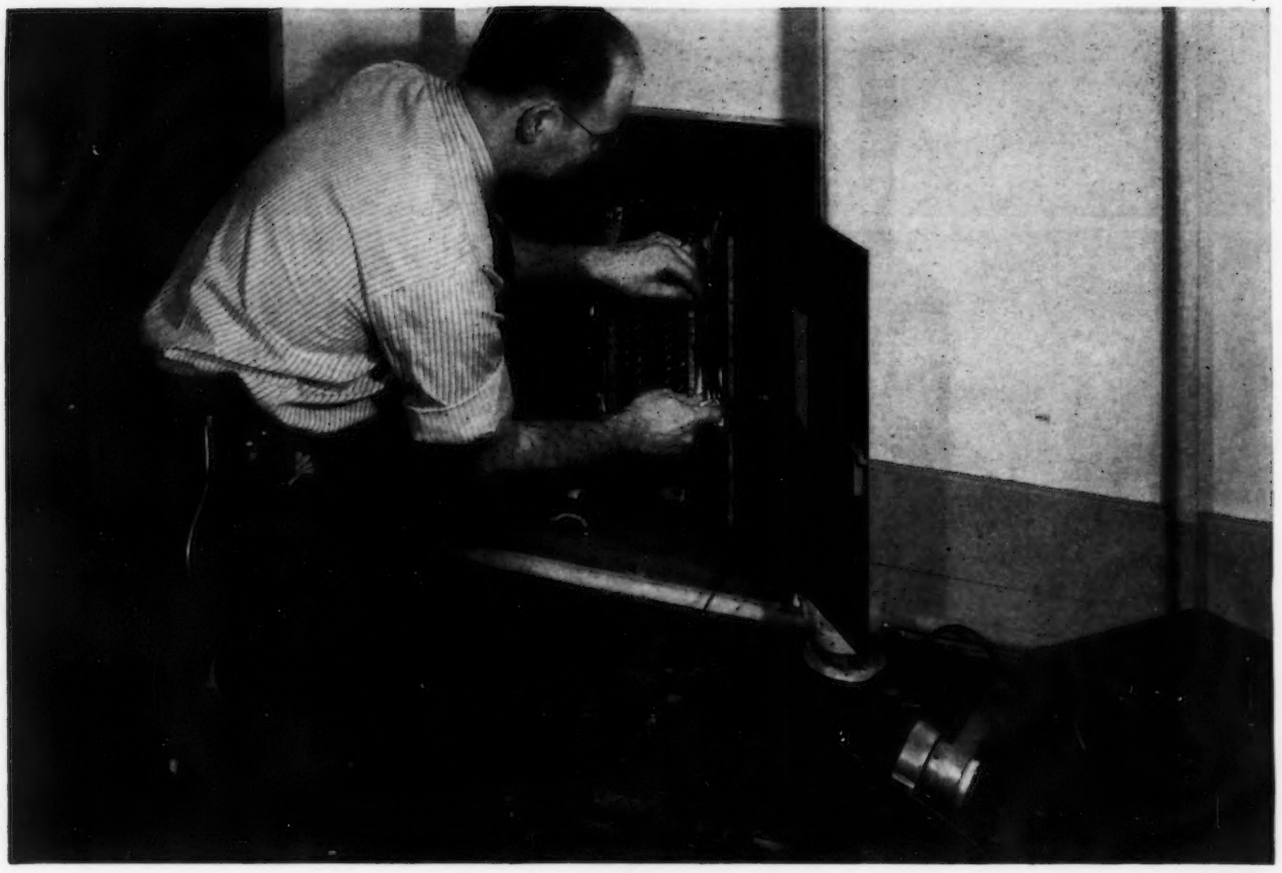

Station wire insulated with GEON makes hit with 'phone men

Some advantages apply to all types of manufacturing and construction

HERE are a few of the advantages of telephone station wire insulated with GEON: it strips fast, clean, easily; it's smooth, not sticky, easy to handle; the colors are clean and bright.

Then add the fact that the excellent electrical properties of insulation made from GEON permit a thinner coating. That means lighter weight, more conductors per conduit, or smaller holes to be drilled during construction.

In addition, insulation made from GEON is self-extinguishing—won't support flame. It resists most normally destructive agents such as ozone, oils, acids, air, aging, abrasion, water, and many others.

GEON's applications range from spaghetti for radio hookup wire to heavy insulation for buried service entrance cable. That's why we urge you to specify wire insulated with GEON the next time you order from your supplier. For information about special applications please write Dept. A-12, B. F. Goodrich Chemical Company, Rose Bldg., Cleveland 15, Ohio. In Canada: Kitchener, Ontario.

Geon
Polyvinyl Materials
A TRADE MARK OF B. F. GOODRICH CHEMICAL COMPANY

B. F. Goodrich Chemical Company
A DIVISION OF THE B. F. GOODRICH COMPANY

For BEAUTY...use Pittco Metal

YOUR CHOICE OF TWO OUTSTANDING LINES

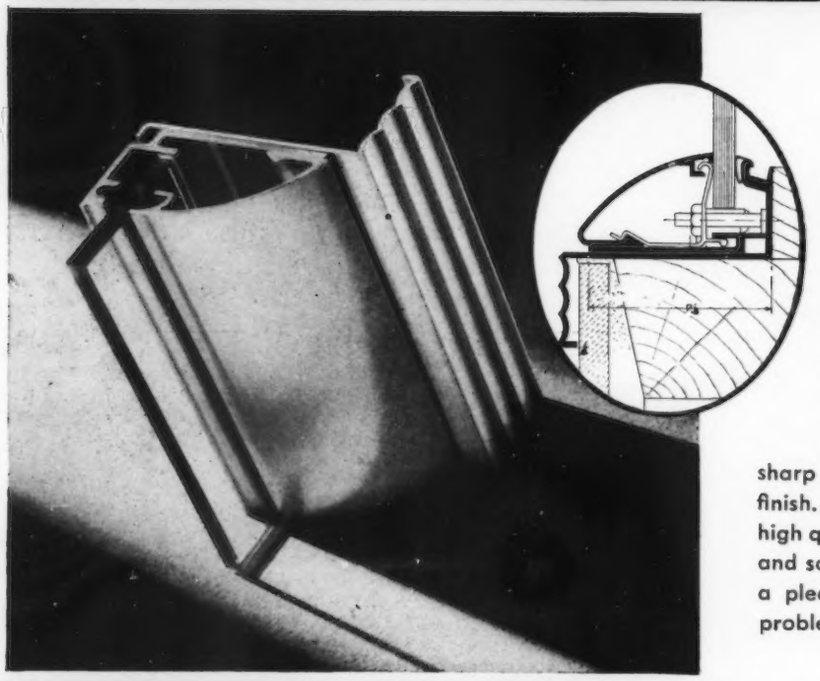

PITTCO DE LUXE Imaginative styling and planned harmony between members are two factors which help to account for the continued popularity of De Luxe Store Front Metal. Pittco De Luxe offers the architect a wide choice of distinctive pieces with which to create sales-winning store fronts. The extruded process of manufacture assures clean, sharp profiles, sturdy strength, perfect color and finish. Pittco De Luxe is intended primarily for high quality work. In the varied bars, mouldings and sash of the De Luxe line, the architect has a pleasing and impressive solution to many problems of modern store front design.

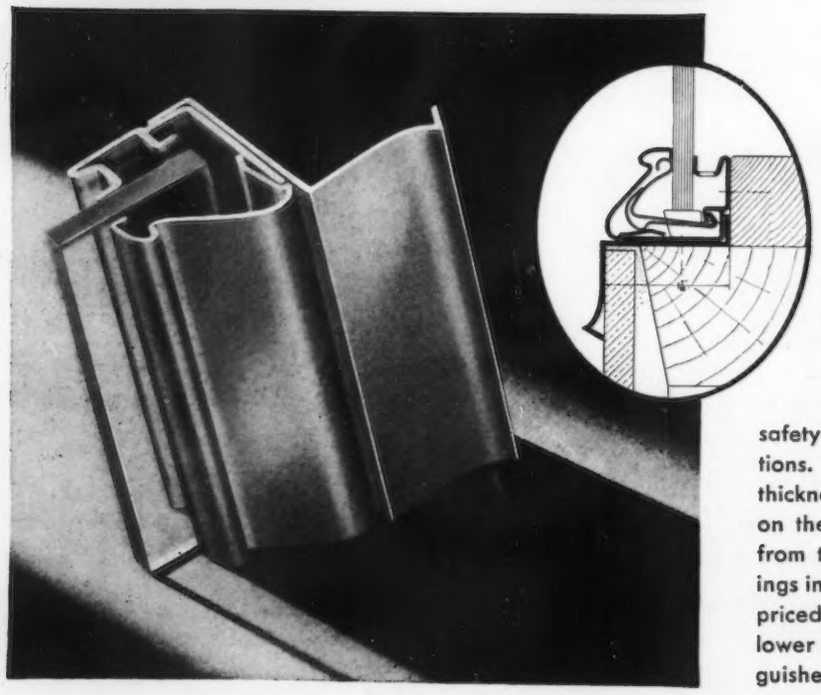

PITTCO PREMIER A high degree of architectural symmetry is one distinguishing mark of the new Pittco Premier line of store front metal. Like Pittco De Luxe, Pittco Premier was designed as a unit . . . each piece styled to complement and heighten the beauty of the other members with which it may be used. Pittco Premier construction can be set more quickly and easily, with greater safety to the glass than other metal constructions. The sash is self-adjusting to various glass thicknesses, yet always maintains a firm grip on the glass. All setting operations are done from the outside and effect a substantial savings in setting time. Pittco Premier is moderately priced, is light in weight, and provides a shallower reveal for show windows than its distinguished companion line.

PITTCO STORE FRONT METAL

PITTSBURGH PLATE GLASS COMPANY

"PITTSBURGH" stands for Quality Glass and Paint

NO BATHROOM IS MODERN
WITHOUT
THE ANYSTREAM
Available Now

FOR NEW CONSTRUCTION AND MODERNIZATION

The Speakman Anystream Shower Head is a *must* for any truly modern bathroom installation. The Anystream is three showers in one, delivering a spray to suit any user in any mood. In the flood position, the Anystream is self-cleaning, passing off all sludge, pipe-scale or sediment. Under all kinds of water conditions and under almost any pressure, the Anystream always gives a full, 48-jet shower pattern. It's simple in design, rugged, delivers years of trouble-free service, if given ordinary care.

Money-Saver, Too

Particularly important in hotel, school and institutional installations are the Anystream's water and fuel saving characteristics. In the needle-spray position, it uses up to 58% less water than ordinary shower heads.

The Anystream is sold by leading plumbing supply dealers and contractors. Now available for immediate delivery. For the name of your nearest Speakman representative, and an illustrated leaflet on the Anystream, write for folder S-42. See Sweet's Architectural File for 1946 for a condensed catalog of Speakman showers and fixtures.

"The best in brass since 1869"

SPEAKMAN

SHOWERS AND FIXTURES

SPEAKMAN COMPANY, WILMINGTON 99, DELAWARE

A TURN OF THE LEVER GIVES . . .
Needle spray *for stimulation!*

Normal spray
for relaxation!

Flood spray
for no-splash rinse.

Never this!—
The Anystream
is self-cleaning.

Again Available

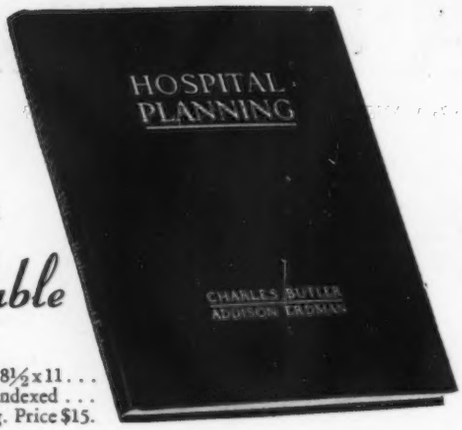

236 pages . . . size 8½ x 11 . . . illustrated and indexed . . . stiff cloth binding. Price $15.

— presents the plans of 51 selected hospitals . . . represents creative efforts of 30 architects. Includes 32 photographs . . . 11 site plans . . . 187 floor plans . . . 38 special unit plans of rooms, wards, departments . . . numerous construction details.

"Hospital Planning"

by CHARLES BUTLER, F.A.I.A. *and* ADDISON ERDMAN, A.I.A.

A Case-Study Analysis of Modern Hospitals

WHEN "Hospital Planning" first went on sale in June 1946, the rush for copies exhausted the initial print order within a matter of weeks.

A second printing, now on the press, soon will make available a fresh supply of copies.

But already our backlog of unfilled orders is commanding a large share of this new supply. And the demand is growing!

Enter your advance order now — by means of the coupon below — and you can assure yourself of this valuable new book on modern hospital planning.

For Hospital Administrators . . . Superintendents . . . Doctors . . . Architects

"Hospital Planning," the first important textbook on the subject in a generation, offers a complete treatise on hospital architecture . . . gives a cross-section of the best in hospitals produced in this country within recent years . . . and provides exhaustive study and examination of new trends.

Messrs. Butler and Erdman, working as a team of specialists, have directed a nationwide, on-premise survey of hospital planning — in theory, in everyday practice and under the stress of unprecedented demands and emergencies. The most significant examples of hospital planning have been studied, assembled, abstracted and dramatized.

This 236-page volume is for architects and hospital groups alike. It will help architects and engineers to learn of the great advances made in hospital architecture . . . to acquire a working knowledge of hospital procedure . . . to avoid the many pitfalls which beset the hospital planner. It will help hospital administrators to visualize their problems in terms of community needs . . . show them how others are meeting similar problems. Price $15, postage prepaid.

Use this convenient coupon to mail your order today!

BOOK DEPARTMENT ARCHITECTURAL RECORD
119 West 40th Street, New York 18, New York

Enter my advance order for.....copies of the new, 1946 edition of "Hospital Planning" by Charles Butler and Addison Erdman, at the price of $15. I enclose payment of $.....

For New York City Delivery add 30 cents for Sales Tax — $15.30 in all.

Name.....

Address.....

City.....Zone.....State.....

When you want to go places . .

When you want to go places and see things in Cleveland, it will be more convenient and more pleasant to start from friendly, hospitable Hotel Cleveland. Adjoining Union Passenger Terminal, Garage and Terminal office buildings. Close to stores, theatres, Public Hall, Stadium, boat docks.

HOTEL CLEVELAND
Cleveland, Ohio

Extra Copper Plus Molybdenum Makes Toncan Iron

Defeat Rust

There is a constant fight to prevent rust from destroying sheet metal parts. But you can win that battle if you use Toncan Iron.

And here is the reason. Toncan Iron is made from refined open-hearth iron which contains a minimum amount of rust-inviting impurities. To this, twice as much copper is added as there is in copper-bearing steel. An exact amount of molybdenum is included to increase the effectiveness of the copper. The result is a material that has the highest rust-resistance of any ferrous material in its price class.

Other outstanding features of Toncan Iron are high ductility and rust-resistance throughout its entire cross-section. This makes it easy to fabricate by any method, without danger of destroying its excellent rust protection.

For complete details on Toncan Iron, write for Booklet 406, "A Few Facts About Toncan Iron for Architects and Engineers."

REPUBLIC STEEL CORPORATION
GENERAL OFFICES • CLEVELAND 1, OHIO
Export Department: Chrysler Building, New York 17, N. Y.

See SWEET'S FILE

—or write us for detailed information on these Republic Steel Building Products:

Pipe — Sheets — Roofing • Enduro Stainless Steel • Toncan Enameling Iron • Electrunite E.M.T. • Fretz-Moon Rigid Steel Conduit • Taylor Roofing Ternes • Berger Lockers, Bins, Shelving, Kitchen Cabinets • Truscon Steel Windows, Doors, Joists and other building products

Republic

TONCAN COPPER MOLYBDENUM IRON

Reg. U. S. Pat. Off.

—for ducts, gutters, conductor pipes, roofing, siding, tanks, ventilators, skylights, hoods, and other sheet metal applications requiring rust-resistance— and for corrugated metal drainage products.

Here's Beauty with Safe, Lasting Service in Step Treads—

Now—
Heavy Duty Molded SAFETY

Step Treads in marbleized blue-gray and tan patterns give appealing beauty with long-lasting service. . . . MELFLEX SAFETY Treads are molded ⅜ inch thick of special "frictioned" rubber compound to cover both the tread and step-edge. Approved by Underwriters Laboratories, Inc. (No. SA 833) as a SAFETY feature, this molded tread applies without requiring metal strips or screws. It stays "put", won't buckle or blister when applied simply with MELASTIC Water-Proof Cement to wood, stone, metal or composition steps. . . .

Molded in One-Piece To Cover Approach Edge . . .

It cushions step edge as well as provides sure-gripping tread safety, *wet* or *dry*. These Treads, also available in black compound, may be applied on inside or outside steps with equal safety and service.

MEL-ISLE Heavy Duty Ribbed Rubber Runner . . .

Compounded of special "frictioned" rubber for hard wear and slip-proof service, MEL-ISLE makes the ideal covering for aisles, runways, corridors, locker rooms. Available in black only 1/8" and 3/16" thick, 36" wide and cut to any specified lengths. High ribbed pattern facilitates cleaning and keeps tread surface slip-proof. MEL-ISLE Molded Mats, for entrances, 3/8" thick and in 5 stock sizes have beveled edges to prevent tripping. Slip-Proof *wet* or *dry*. . . . Durable, Economical.

Write for Factory-Saving-Prices on any Safety Surfacing Need.

MELFLEX PRODUCTS CO.
L. E. WARFORD, President
415 Wheeler Lane, Akron 8, O.

What do I buy in a

HYDRAFILTER?

NOT ONLY double action grease interception

BUT ALSO these features:

1. *Selective Handling of Solids*
2. *Smooth Non-Clogging Bottom*
3. *Complete Protective Venting*

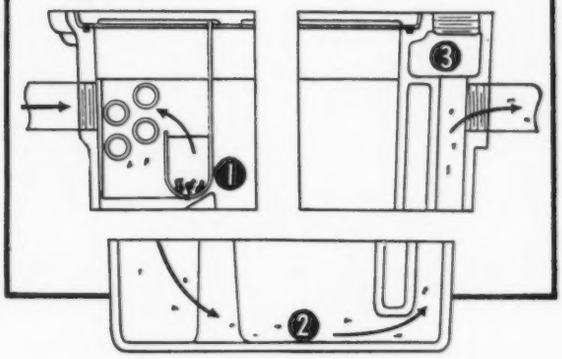

The Wade HydraFilter grease trap goes far beyond introducing its new principle of hydraulic filtering. Let us cut a HydraFilter apart and look at three other built-in features: (1) Special trough retains dense bits of bone, glass, metal that might clog waste lines further on. (2) Smooth unobstructed floor helps HydraFilter eject lighter solids such as vegetables, keeps it from becoming a garbage receptacle. (3) Triple venting consists of body

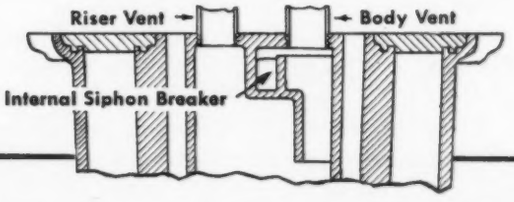

and riser vents with optional top or side outlets, and an internal siphon breaker. These prevent emptying of trap by siphoning or built-up pressure.

This is the third of a series of facts about the Wade HydraFilter. We will send on request a fuller description in our booklet, "A New Principle of Grease Interception."

WADE
MANUFACTURING COMPANY

85 NORTH STATE STREET • ELGIN, ILLINOIS

Jamestown Metal Corporation requests an opportunity to work with architects on plans for Elevator Enclosures, Interior Trim, Hollow Metal Doors, Office Partitions and Cold Rolled Mouldings in Bronze, Aluminum, Steel and Stainless Steel.

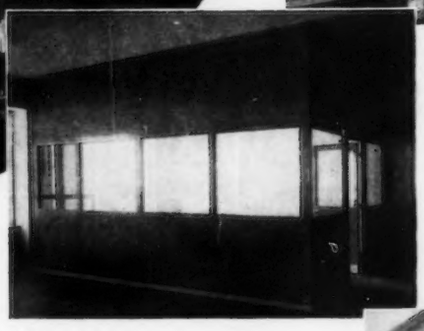

A few interior close-ups of partitions, clothes closets and doors

CRIMINAL COURTS BUILDING, New York City

Harvey Wiley Corbett & Charles B. Meyers - Associate Architects
Cauldwell-Wingate Company - - - - - General Contractors
Design, construction and operation under the jurisdiction of the Dept. of Public Works.

This excellent example of modern hollow metal installation combines simplicity, beauty and utility.

The Jamestown Metal Corporation is represented in this project by several thousand feet of flush metal partition together with special applications such as low railing, cubicles and clothes closets, as illustrated, in addition to the complete installation of steel swing doors and frames.

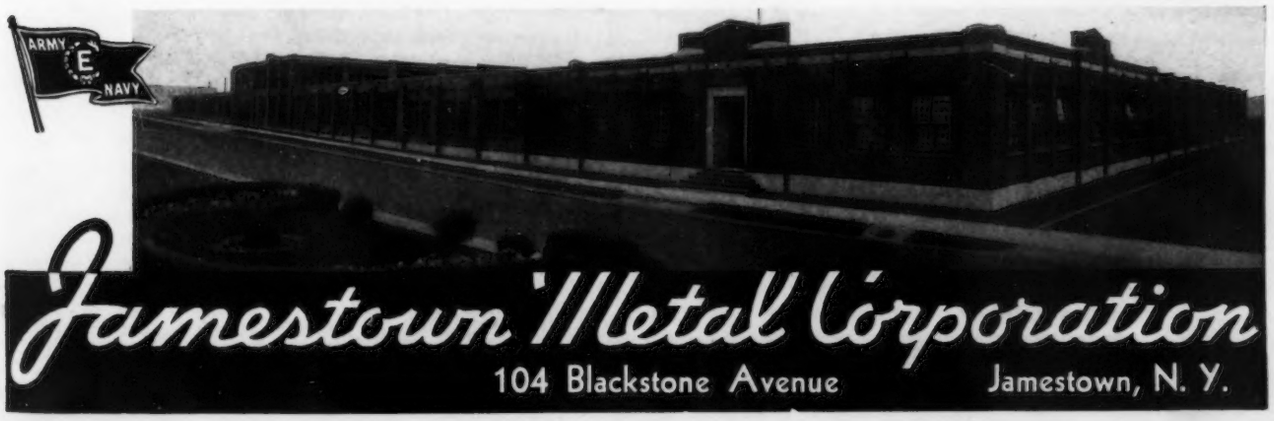

Jamestown Metal Corporation
104 Blackstone Avenue Jamestown, N. Y.

Seaporcel

PORCELAIN ENAMEL

Store Fronts . . . Facades . . . Signs

Thousands of installations of SEAPORCEL Porcelain Enamel throughout the country are our testimonial advertisements. We've fabricated store fronts, building facades, sign fascias and advertising signs that sparkle, are colorfast and clean . . . and remain so. We've fabricated brilliant and durable murals in glowing colors.

SEAPORCEL* can be executed in any color and tint, and is available in standard finishes of gloss, semi-matte, "terra cotta" and "granite." It is fire-proof, corrosion and acid resistant; will not crack or craze when exposed to thermal shock.

When you specify SEAPORCEL, you assure yourself and the owner of the finest of materials, skilled craftsmanship and the services of a production and engineering organization of recognized ability.

Write today for our catalogue describing details of customary design and examples of completed work.

SEAPORCEL PORCELAIN METALS, INC.

Formerly Porcelain Metals, Inc.

28-02 BORDEN AVENUE, LONG ISLAND CITY 1, N. Y.

* Seaporcel (Reg. U. S. Pat. Off.) is a ceramic coating fused into its metal base at 1550 degrees F.

SEE OUR CATALOG IN SWEET'S

Seaporcel

"Member Porcelain Enamel Institute, Inc."

Now YOU Can Make ACCURATE DRAWINGS

Anywhere . . . Any Time . . . with the New

JIFFY SKETCH

SCALE DRAWING PAD

Save Precious Time!

No Drafting Board, Ruler or T-Square!

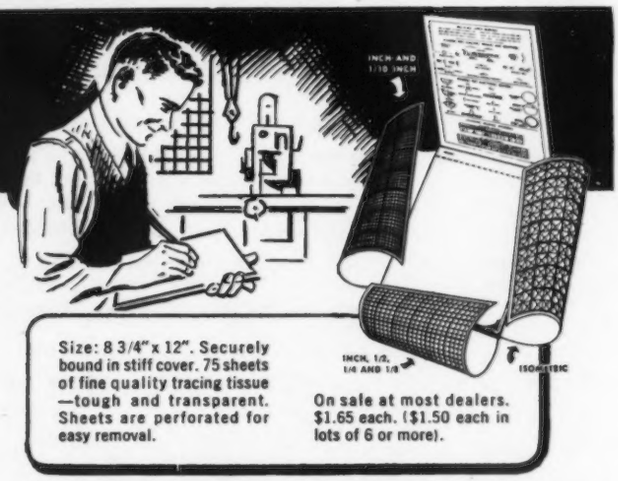

Size: 8 3/4" x 12". Securely bound in stiff cover. 75 sheets of fine quality tracing tissue —tough and transparent. Sheets are perforated for easy removal.

On sale at most dealers. $1.65 each. ($1.50 each in lots of 6 or more).

• With this amazing pad you can quickly make scale drawings wherever you may be—in your office, in the shop or in the field.

It's easy! Just select the scale you wish to use and place one of the tissue sheets over it. Make your drawing with the aid of the printed scale which shows through the tissue.

Each pad is equipped with 6 different scales—inch, tenth, eighth, quarter, half, and isometric with 1/8 inch scale. The scales are clearly printed on cover flaps. They positively cannot slip out of position; can't get lost.

BETTER THAN GRAPH PAPER. Your drawing can be blue-printed. No ruled lines on tissue to confuse your drawings. You get all the advantages of ruled paper, with none of the disadvantages.

Valuable information on the back of each cover flap. Decimal equivalent chart, symbols used in mechanical drawing, architectural symbols and other useful data for quick reference.

"JIFFY SKETCH is indispensable . . . I wouldn't be without it", say Engineers, Designers, Draftsmen, Field Men, Sales Engineers, Builders, Architects, Estimators, Students and Patent Attorneys. Repeat orders from large firms are proof of satisfaction.

A real time saver for busy men who wish to convey their ideas quickly . . . accurately.

Only $1.00 — Save 1/3

SPECIAL INTRODUCTORY OFFER

Money-back Guarantee! If you have not yet used a JIFFY SKETCH Scale Drawing Pad, we'll send you one on receipt of a dollar bill. We want you to learn for yourself how quickly and easily you can make properly proportioned drawings without previous experience . . . without T-square or triangle. Your money will be promptly refunded if you are not entirely satisfied. Send for *your* JIFFY SKETCH today!

JIFFY SALES CO. 1851 E. 37th St. • Cleveland 14, O.

For that New Lighting Job... Specify

ALBA-LITE

Corning's Newest Development in Fluorescent Lightingware

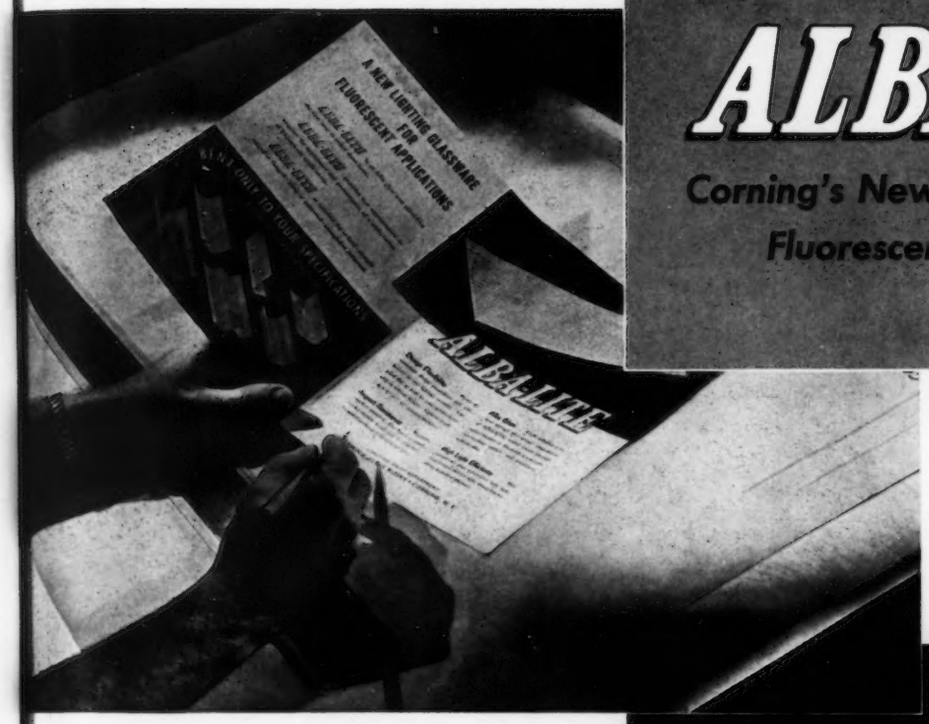

IMPORTANT FEATURES OF ALBA-LITE

Color Selectivity ALBA-LITE is a light opal glass transmitting the full color spectrum.

Design Flexibility opens up numerous design possibilities and adds beauty to any lighting assembly. Supplied flat or bent to your specifications with or without flanges. Light in weight—in $\frac{1}{8}$" or $\frac{1}{12}$" nominal thickness.

Light Diffusion is secured through the special composition of ALBA-LITE rather than through surface treatment. The result is a smooth, easy-to-clean surface.

High Light Efficiency This translucent glass provides high light transmission and low light absorption resulting in greater efficiency.

Some of the many applications for ALBA-LITE

Continuous Troffers **Illuminated Ceilings**
Recessed Fixtures **Wall Bracket Units**
Suspended Fixtures

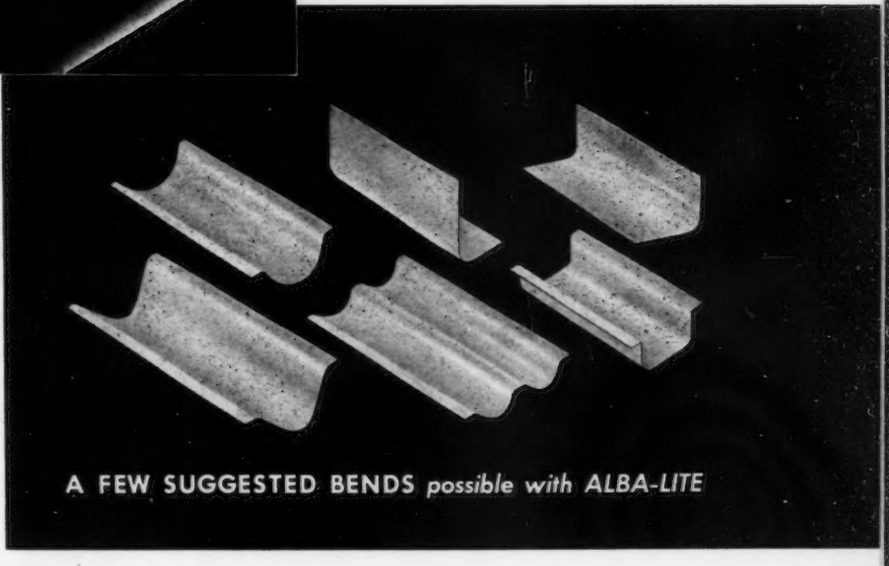

A FEW SUGGESTED BENDS *possible with ALBA-LITE*

ALBA-LITE, because of its design flexibility and the new opportunities it offers to improve appearance and performance, is fast becoming one of the most popular glassware products ever offered for fluorescent lighting.

ALBA-LITE is offered in rolled sheet form—flat or bent—straight-edged or flanged—plain or patterned—to comply with your specifications. Lighting engineers like it because it offers almost unlimited design flexibility and an attractive appearance, lighted or unlighted.

That's why you should specify ALBA-LITE for your next lighting job. Corning Lighting Engineers will gladly work with you on any lightingware problem. For complete details and samples write to Lighting Sales Dept. AR-12

CORNING GLASS WORKS
CORNING, N. Y.

Send for free sample of ALBA-LITE and compare it with the glass you are now using

"CORNING" and "ALBA" are registered trade-marks and indicate manufacture by Corning Glass Works, Corning, New York.

CORNING *means* Research in Glass

Corning Engineered Lightingware
BRAND

Add beauty and ventilation

TO GLASS BLOCK CONSTRUCTION *with*

WINCO VENTILATORS

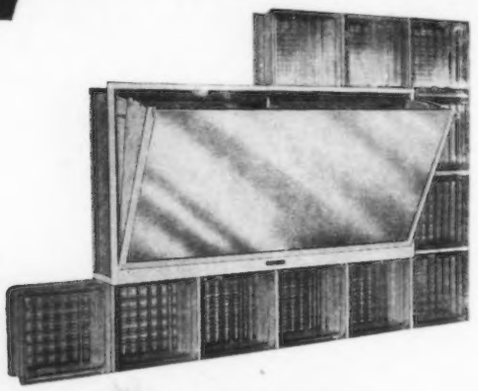

For offices, stores, and home baths and kitchens.

Exterior glass block construction is not complete without Winco Ventilators.

Admits light and ventilates like a window—will not admit rain, flies or insects when open. Entire unit in steel frame sets in mortar—complete with interior "vaned" glass panel and exterior bronze screen which are removed during construction. 6 sizes: for 6" blocks and 8" blocks.

—and WINCO VENTILATING FANS

EASY ASSEMBLY

Beautiful-Efficient

For home kitchens and offices. Metal frame easily installed in 6" or 8" glass blocks, in openings of 1 or 4 block displacement or in standard frame walls. Others for 9" to 13" brick walls. Complete with fan, motor and automatic door switch.

Detailed specifications, illustrated literature and prices on these modern Winco installations sent upon request.

WINCO Ventilator Co INC.

1433 VERONICA AVE. • ST. LOUIS 15, MO.

I wanted **DEPENDABILITY**

GRAND RAPIDS *Invizible* SASH BALANCE

gave me Dependable Performance

The Grand Rapids Invizible has many features of superiority, as has been conclusively proved in thousands of war time and peace time installations. Among these are ease of installation, actual invisibility, and dependable, efficient operation in all climates and under varying conditions. The same balance for upper and lower sash make them interchangeable and 10 sizes meet 95% of all residential requirements. Complete illustrated instructions are on every carton.

SEND FOR SASH BALANCE CATALOG

which contains complete information on sash balance sizes, directions for installing, etc. All fully illustrated.

GRAND RAPIDS SASH PULLEYS

◀ **No. 103** face plate, cone bearing type and **Nos. 175, 109, 110** sawtooth drive type sash pulleys cover 95% of all sash pulley requirements. ▶

GRAND RAPIDS HARDWARE COMPANY

GRAND RAPIDS • • MICHIGAN

★ Things are rolling at American-Standard plants. Production is steadily increasing. New facilities are being added. So that next year, you can expect more and more American-Standard Heating Equipment and Plumbing Fixtures to be available for you.

We suggest you contact your Heating & Plumbing Contractor for complete details. Purchases for modernization can be made on a convenient Time Payment Plan. **American Radiator & Standard Sanitary Corporation,** P. O. Box 1226, Pittsburgh 30, Pennsylvania.



AMERICAN-Standard

HEATING PLUMBING

Serving the Nations' Health and Comfort



LOOK FOR THIS MARK OF MERIT—It identifies the world's largest line of Heating and Plumbing Products for every use . . . including Boilers, Warm Air Furnaces, Winter Air Conditioners, Water Heaters, for all fuels—Radiators, Convectors, Enclosures—Gas and Oil Burners—Heating Accessories—Bathtubs, Water Closets, Lavatories, Kitchen Sinks, Laundry Trays, Brass Trim—and specialized products for Hospitals, Hotels, Schools, Ships, and Railroads.

Specify GRID UNIT HEATERS

The Only Unit Heater positively free from Electrolysis

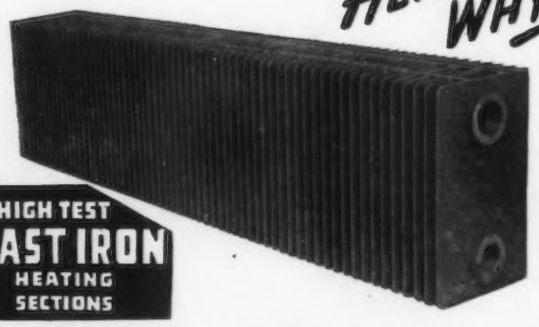

HERE'S WHY

HIGH TEST CAST IRON HEATING SECTIONS

★ *GRID Unit Heaters are free from electrolysis and the corrosion that follows it, because they are ONE type metal—high test cast iron—the same metal as the steam supply and return pipes, and the boiler itself.*

★ *GRID Unit Heaters cannot be influenced by electrolytic action, as there are no dissimilar metals anywhere. No electrolysis can ever develop to cause corrosion, breakdowns, leaks or heating failures, now or in future years.*

★ *GRID Unit Heaters will last as long as the pipes furnishing steam to them, and here's why:*

● **One piece construction heating sections (patented) of high test cast iron that will withstand steam pressures up to 250 lbs.**

● **No soldered, brazed, welded nor expanded connections to become loose or develop leaks.**

That's why GRID Unit Heaters are free from maintenance expense . . . many units have been in continuous operation over 16 years without any maintenance. Today GRID Unit Heaters are preferred by all types of plants all over the country. Complete information with capacity tables will be sent upon request. Ask for booklet "Corrosion in Unit Heaters."

D. J. MURRAY MANUFACTURING CO. WAUSAU WIS.

Use this Timely Catalogue!

80 Dimensionally accurate aluminum moulding shapes, expertly designed in matching groups to fit any installation, illustrated in the new full-color CHROMTRIM Catalogue No. 2. Also features many unique installation possibilities.

Follow the new trend—give home-making women the gleaming beauty—the modern neatness—the easy maintenance they want in the homes you plan to build (or modernize). Specify CHROMTRIM for kitchens, bathrooms, attics, etc.

IMMEDIATE DELIVERY

Nationally distributed. See insert in Sweet's File (Architectural Edition).

R. D. WERNER CO., Inc.

Manufacturers of Metal and Plastic Products

295 FIFTH AVENUE · NEW YORK 16, N. Y.

Factories: New York City—Greenville, Pa.

This 16-page brochure shows how and why Aquella is used throughout the Nation to control water seepage and dampness

Here is the new 16-page brochure, "Aquella and Concrete Masonry Construction", that will be welcomed by members of the construction industry. Highly informative, it brings a wealth of technical data on Aquella ...the principle on which it works to control dampness and seepage on all porous masonry surfaces—plus many interesting examples of the ways it is being used throughout the nation. For your copy, simply fill in and mail the coupon at right.

PRIMA PRODUCTS, INC.

NATIONAL DISTRIBUTORS

10 East 40th Street • New York 16, N. Y.

PRIMA PRODUCTS, INC., Dept. E
10 East 40th Street, New York 16, N. Y.

Please send my free copy of "Aquella and Concrete Masonry Construction".

*Name*_____

*Address*_____

*City*_____ *State*_____

ZINC

"BY FAR THE BEST" protective metallic coating for rust-proofing Iron or Steel

U. S. BUREAU OF STANDARDS CIRCULAR NO. 80

Buildings, equipment, machinery . . . in all of them galvanizing (zinc-coating) against rust is good engineering, sound economy.

Zinc, in the form of galvanizing, protects against rust in TWO WAYS: *First*, by simple coverage, with a sheath of rust-resistant metal . . . *Second*, by electro-chemical action, or "sacrificial corrosion." Good design that includes zinc-protected steel or iron means long-time, low-cost protection . . . savings in materials and maintenance. It's wise to specify heavy coatings—for the heavier the coating, the better the protection. The "Seal of Quality," shown at the right, is the yardstick of economy and service-life in galvanized sheets. It denotes at least 2 oz. of Zinc per square foot!

ZINC INSTITUTE 2 OZ. COATING SEAL OF QUALITY

American Zinc Institute

Room 2620—35 East Wacker Drive, Chicago 1, Illinois

Send this COUPON for valuable FREE BOOKLETS

These factual, illustrated booklets are yours for the asking. They tell how ZINC can solve modern day rust problems. Check your needs and mail today.

- ☐ Facts About Galvanized Sheets
- ☐ Repair Manual—Galvanized Roofing and Siding
- ☐ Use Metallic Zinc Paint to Protect Metal Surfaces
- ☐ The Zinc Industry—A Mine to Market Outline.

Name_____

Company_____

Address_____

City_____ State_____

H&H WEATHER-PROOF

OUTDOOR SWITCHES AND RECEPTACLES

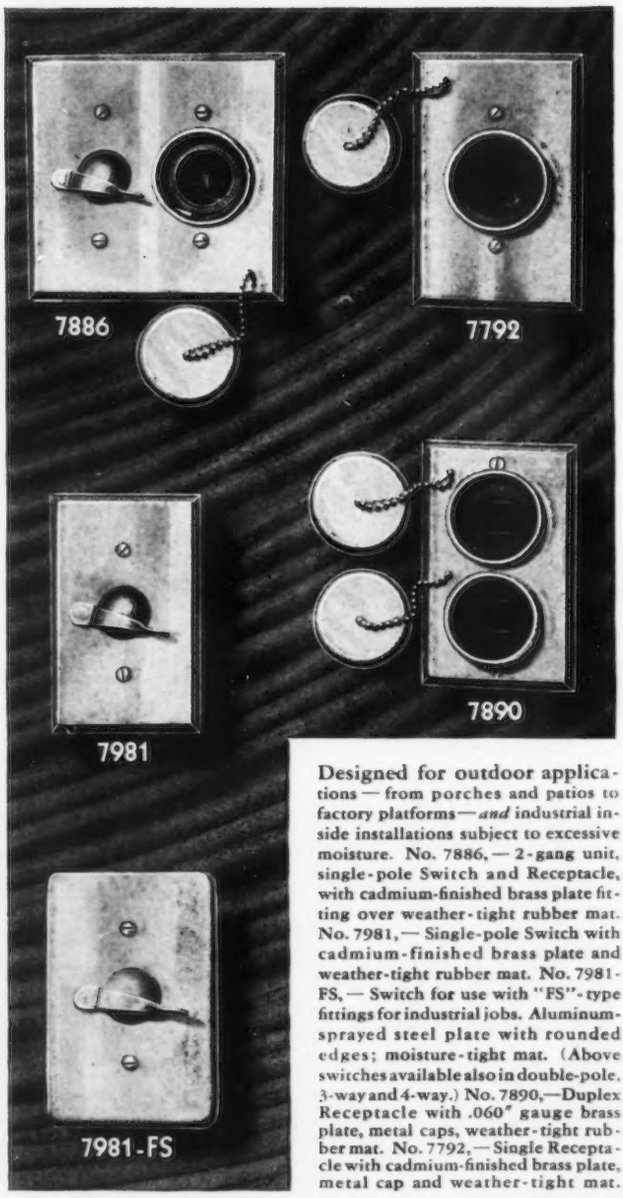

Designed for outdoor applications — from porches and patios to factory platforms — *and* industrial inside installations subject to excessive moisture. No. 7886, — 2-gang unit, single-pole Switch and Receptacle, with cadmium-finished brass plate fitting over weather-tight rubber mat. No. 7981, — Single-pole Switch with cadmium-finished brass plate and weather-tight rubber mat. No. 7981-FS, — Switch for use with "FS"-type fittings for industrial jobs. Aluminum-sprayed steel plate with rounded edges; moisture-tight mat. (Above switches available also in double-pole, 3-way and 4-way.) No. 7890,—Duplex Receptacle with .060" gauge brass plate, metal caps, weather-tight rubber mat. No. 7792, — Single Receptacle with cadmium-finished brass plate, metal cap and weather-tight mat.

HART & HEGEMAN DIVISION

ARROW-HART & HEGEMAN ELECTRIC COMPANY, HARTFORD 6, CONN., U.S.A.

No mystery—
No magic—
No monkey-business—
Just facts for architects!

You won't find the answer to the Hindu Rope Trick in any of American Blower's Bulletins.

But you will find them packed with authoritative data on air handling, air conditioning, heating, cooling, ventilating and allied subjects. These Bulletins have been compiled by American Blower engineers after extensive research. We believe they will save you both time and trouble.

Drop us a card today. Your selection of the five Bulletins shown, or any of our many other Bulletins, will be sent promptly without charge or obligation.

Bulletin No. 6527

Air Conditioning Units

Complete data on three types of unit conditioners to fit different types of applications. Type A units for the average commercial or industrial jobs requiring from 1000 to 13600 CFM. Type S for washed air and high relative humidity—1000 to 13600 CFM. Type M for large central systems up to 41000 CFM.

Bulletin No. 6427

Lineflow Fan Units

Self-contained, attractive fan units for many supply or exhaust jobs on commercial and industrial applications. Made in a variety of arrangements to fit all types of jobs. Seven sizes from 1000 to 22000 CFM. Pressures from ⅛" to 1½" w.g.

Bulletin No. 6017

Heating & Ventilating Units

Compact, quiet units for stores, offices, auditoriums, telephone exchanges, schools and similar applications. Supplies heated, filtered or humidified air as required. Seven sizes from 1000 to 15000 CFM. Suitable for floor, wall or ceiling mountings.

Bulletin No. 6117

Installation and Maintenance Instructions

A complete set of instructions for the erection and operation of each type American Blower unit as listed on the cover of the bulletin. Contains a number of illustrations with labelled parts and cutaway view plus piping diagrams, maintenance suggestions and other valuable information for architects.

Bulletin No. 6627

Evaporative Condensers

American Blower Evaporative Condensers, described in this bulletin, save 90 to 95% of the water normally required for refrigeration systems. Made in 21 sizes from 2 tons to 285 tons capacity. Can be furnished in weatherproof construction for outdoor installation. Suitable for floor or ceiling mounting.

AMERICAN BLOWER

AMERICAN BLOWER CORPORATION

DETROIT 32, MICHIGAN

In Canada: CANADIAN SIROCCO CO., LTD., Windsor, Ont.

Division of American Radiator & Standard Sanitary corporation

Here's the inside story...

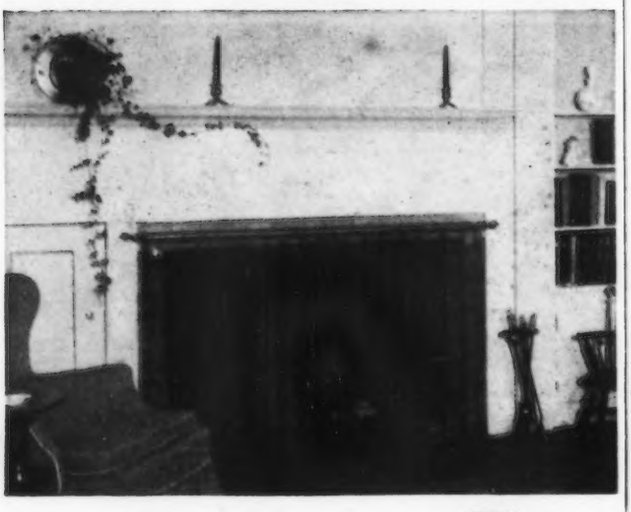

BENNETT

Fresh-Aire

FIREPLACE UNIT



You Face New Problems

with the fireplace in the modern home

As you know, a fireplace when burning exhausts more than 200 cu. ft. of air per minute from the living quarters of a house. If tightly constructed, replacement air cannot enter from outdoors in sufficient quantity to supply the chimney draft. Result: partial vacuum, back-puffs, and smoke. If sufficient replacement air *can* enter, it lowers the average temperature of the entire house, cold drafts sweep the floor and automatic furnace controls are out of balance.

In sharp contrast, the *Bennett Fresh-Aire Fireplace Unit* draws replacement air from outdoors, through heating chambers, and circulates it into the living quarters—warm instead of cold. Result: no uneven temperatures, no interference with heat controls, and a net gain in evenly distributed warmth.

The benefits of this principle have been well proved in over 20 years experience and are especially important to you—in designing the modern, fully weather-stripped home with central heating.

There are four additional reasons why so many *Bennett Fresh-Aire Fireplace Units* are specified. 1—Thoroughly ventilates and "refreshes" the air. 2—Broad freedom to design the mantel . . . normal brick firebox sidewalls . . . no floor grilles. 3—Serves as a complete form for *smoke-free* internal proportions of throat dampers, smoke chamber and shelf, etc. 4—The small first cost is quickly offset by savings in construction and fuel.

For camps, summer and southern homes—places without furnace heating (also basement "playrooms") the *Bennett Warm-Aire Fireplace Unit* is recommended.

Flexscreen
Reg. U. S. and Canada Pat. Off.

To add beauty and full protection—every fireplace should have a *Bennett Flexscreen*—the safety fireplace curtain.

For complete details
Send today for Bennett Fireplace Catalog—or see Sweet's

Bennett-Ireland Inc.
1246 MAPLE STREET, NORWICH, N. Y.

IF SHE WERE QUEEN FOR A DAY...

THERE would be thousands of new termites to do their destructive eating if this Queen had her way. The Queen termite lays over 7000 eggs a day!

But termites can't be dangerous when wood has been pressure-impregnated with Du Pont Chromated Zinc Chloride. "CZC"-treated wood is unattractive to termites—fends off their destructive invasions.

"CZC"-treated wood has all the natural advantages of untreated wood plus many others. It not only resists termites, but also prevents decay, retards fire. It is odorless, paintable, clean and easy to handle.

You can make your buildings safer and easier to maintain at low cost by specifying "CZC"-treated wood. For additional information on this wood preservative that gives additional long life to wood, write E. I. du Pont de Nemours & Co. (Inc.), Grasselli Chemicals Department, Wilmington 98, Del.

DU PONT CZC

Chromated Zinc Chloride

MAKES WOOD RESIST DECAY · REPEL TERMITES · RETARD FIRE

DU PONT
REG. U. S. PAT. OFF.

BETTER THINGS FOR BETTER LIVING
...THROUGH CHEMISTRY

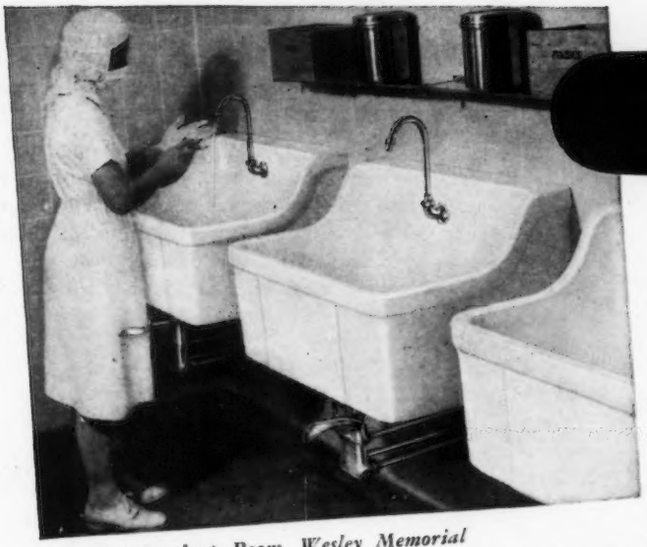

Surgeons' Scrub-up Room, Wesley Memorial Hospital, Chicago.

Duraclay*

for hospitals you are planning

Check the leading hospitals built during the past ten years and you will find that in an amazingly large percentage of cases, architects have used Crane Duraclay fixtures.

There are two reasons why Crane plumbing is favored by architects and hospital administrators: First, the Crane line includes specialized fixtures to meet every need, designed in cooperation with famous surgeons and hospital experts. Second, Crane fixtures are available in Duraclay—an all-ceramic material developed to meet the specialized needs of hospital service.

Duraclay is highly resistant to thermal shock—sudden changes in temperature do not affect it.

Duraclay has a hard glazed surface that defies scratching and abrasion.

Duraclay is impervious to acids and highly resistant to staining.

Duraclay is smooth, gleaming, easy to clean and offers the maximum in sanitation.

Examination room, Children's Memorial Hospital, Chicago.

* *Duraclay* *exceeds the rigid tests imposed on earthenware (vitreous glazed) established in Simplified Practice Recommendation R106-41 of the National Bureau of Standards.*

Duraclay sinks in Endoscopic Room of a large Evanston hospital.

Duraclay sinks in Surgeons' Scrub-up Room, St. Francis Hospital, Evanston.

CRANE

CRANE CO., GENERAL OFFICES:
836 S. MICHIGAN AVE., CHICAGO 5

PLUMBING • HEATING • PUMPS
VALVES • FITTINGS • PIPE

NATION-WIDE SERVICE THROUGH BRANCHES, WHOLESALERS, PLUMBING AND HEATING CONTRACTORS

DUNHAM *helps You keep him Comfortable*

NO MATTER HOW QUICKLY
THE WEATHER CHANGES

CONTROL PANEL is the centralized operating station at which all control adjustments and settings are made. It is the Mechanical Brain which is electrically advised by the . . .

Occupants of a building are protected against variables in weather conditions by the completely automatic *Dunham Differential Vacuum Heating System* which coordinates the functions of all parts of the heating system to give the maximum in heating efficiency with the greatest fuel economy. C. A. DUNHAM, 450 E. Ohio St., Chicago 11, Ill. 11-46



AUTOMATIC SELECTOR of the changing demand for heat caused by changes in the weather, and is also advised by the . . .

HEAT BALANCER of the actual heat supplied, which balances the demand.

DUNHAM
DIFFERENTIAL HEATING
CHICAGO • TORONTO • LONDON

OPPORTUNITIES AVAILABLE

MEN WANTED: Designer, Engineer or Architect. Long established engineering and construction company wants man able to develop design of industrial and commercial buildings from sketches. Will pay straight salary first year and adjust to ability. Submit all personal data and complete experience record with application. Will pay expenses for interview. Location Eastern Pennsylvania. Box 178, ARCHITECTURAL RECORD, 119 W. 40th St., New York 18.

THERE ARE SEVERAL splendid opportunities for graduate architectural draftsmen in the Philadelphia area that will pay anywhere from ninety to one hundred and twenty-five dollars per week. Call or write Executive Employment Service, 37 South 13th Street, Philadelphia, 'Phone Locust 7–2828.

WANTED: Chief Architect or Chief Architectural Draftsman, for schools, hospitals, and other public buildings in Architects' Office, expanding and in territory developing as result of Federal Grants-in-Aid Benefits. Good opportunity for man looking to the future with possible firm membership. State in reply age, education, experience, references, marital status, religion, and salary desired. Write particulars to Hawkins and Walker, Elsby Building, New Albany, Indiana.

WANTED: Architectural Draftsman, capable of preparing sketches and working drawings. Must be experienced. Permanent employment and excellent future for well qualified man. Office in State of Maryland. Box 180, ARCHITECTURAL RECORD, 119 W. 40th St., New York 18.

WANTED: Combination Chief Architectural Draftsman and Specification Writer. Must have good background. Principal work Commercial, Schools, Hospitals, Churches. Responsible permanent position for right man with Houston, Texas, firm. Box 182, ARCHITECTURAL RECORD, 119 W. 40th St., New York 18.

OPPORTUNITY for a young graduate architect of vision interested in obtaining his license and fitting himself for practice in his own office. If you want the wide experience to be gained in a small office, send all particulars. Do not reply if you cannot afford to forego the allure of high wages for specialized work. Daniel Perry, AIA, Architect, 1213 Main St., Port Jefferson, New York.

PROJECT ENGINEER: Excellent opportunity for structural engineer. B.S. Degree in civil engineering and at least three years in construction business or consulting engineer's office required. Duties to include: 1. Preparation and designing of plans and specifications for additions, alterations, major maintenance of all buildings, partitions, structures, and installation of process equipment. 2. Supervising the installation of structural steel, iron, and timber. Contracting suppliers. 4. Inspecting buildings. Philadelphia area. State fully age, education, and work experience. Replies to Box 184, ARCHITECTURAL RECORD, 119 W. 40th St., New York 18.

FOR SALE: Vertical cylinder blue printing machine complete with copper lined sink and drip tray. Also cabinet with fifteen drawers for blue prints. Write Room 211, Mohican Hotel, New London, Conn., or 'phone 9587.

Kimpreg* + Plywood

Wonder-working new plastic alloy for you

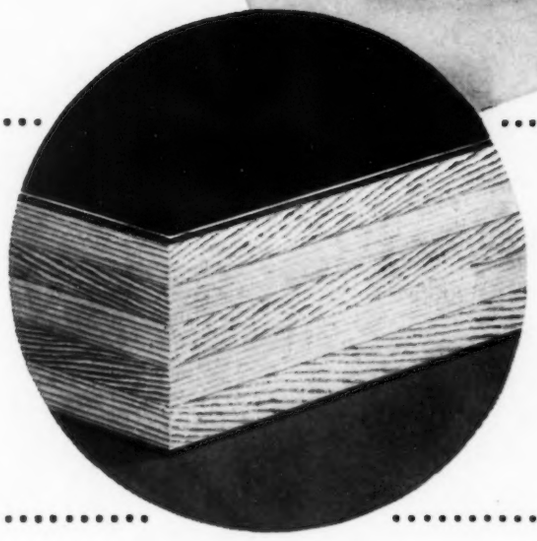

PLASTIC-ARMORED, WEATHERPROOF

Armored against wear and weather, Kimpreg + Plywood resists deterioration. Unaffected by rain, snow or sub-zero cold. Withstands exposure, for short periods to temperatures up to + 350° F. Designed for enduring service.

ATTRACTIVE, DURABLE Glossy, flint-like and washable, Kimpreg + Plywood combines utility and smartness for bars, kitchen counters, cafeteria tables —or wherever a surface should be durable and attractive. Kimpreg is mar-resistant, stain-proof, impervious to alcohol and weak acids.

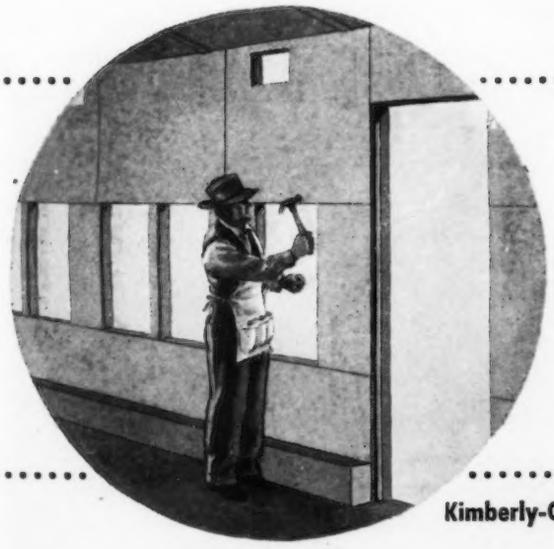

VERSATILE, WORKABLE Kimpreg + Plywood is an entirely *new* material with the use-advantages of plastic plus the basic economy and workability of plywood. Learn how it provides new horizons for your ideas and product planning. Mail the coupon for full information today.

Kimberly-Clark Corporation, Neenah, Wisconsin. Please send me the new free book on Kimpreg and its uses.

AR-1246

Name _____

Firm _____

Type of Business _____

Address _____

City, Zone, State _____

Kimpreg
REG. U.S. PAT. OFF.
PLASTIC SURFACING

*TRADEMARK

A PRODUCT OF Kimberly Clark RESEARCH

Floor Designs

THAT KINDLE THE ARCHITECT'S EYE ... AND BENEFIT HIS CLIENT'S PURSE

Turn your imagination loose among the artistic range of Moultile colors. Plot the individual squares into orderly geometric designs . . . employ paneled, banded and spot patterns . . . or allow the tiles to fall freely into pleasing random effects. Blend the floor pattern harmoniously with the character and color of walls and furnishings. All this can be achieved using Thos. Moulding Standard Moultile . . . without resorting to costly special fabrication.

In original cost . . . and on a cost-per-year basis, as well . . . Moultile is surprisingly economical. The dense texture, the rich colors and the beautifully variegated marbleizing are uniform throughout the thickness of the material. Hard wear leaves no noticeable marks. There is no need for costly periodic refinishing. Your clients will also like Moultile floors for their foot-friendly resilience, their quiet and non-slippery surface. Write today for free samples and catalog to: THOS. MOULDING FLOOR MFG. CO., 165 W. Wacker Drive, Dept. AR-12, Chicago 1, Illinois.

THOS. MOULDING

Moultile

Flexible-Reinforced

MASTER ASPHALT TILE

Moultile colors and patterns contribute to the friendly, home-like setting of this lobby at the Elms Hotel, Excelsior Springs, Mo., A. C. Rindskopf, Designer.

Contemporary SHOPS in the United States

By EMRICH NICHOLSON

Second and Enlarged Edition, 1946

CONTEMPORARY SHOPS IN THE UNITED STATES was published to supply an insistent demand. Many merchants — many designers — many people deeply interested in modern architecture — knew how much fine work had been done in this field. They demanded a book which should show examples of such work, recently carried through in the United States.

Including the supplement of 24 pages, over 400 illustrations, plans, etc., showing 113 shops, large and small, handling many lines of merchandise, located from coast to coast, designed by 70 leading designers and architects. 216 pages. 8½ by 11. $10.00.

THE ABOVE BOOK WILL BE MAILED POSTPAID ON RECEIPT OF PRICE

Send your order and payment direct to

Book Department, Architectural Record
119 West 40th Street, New York 18, N. Y.

Please send copy(s)
CONTEMPORARY SHOPS IN THE UNITED STATES
Money order or check for $ enclosed
(For N. Y. City Delivery add 2% Sales Tax—$10.20 in all)

Name.....

Address.....

City.....*Zone*.....*State*.....

A.R. 12–46

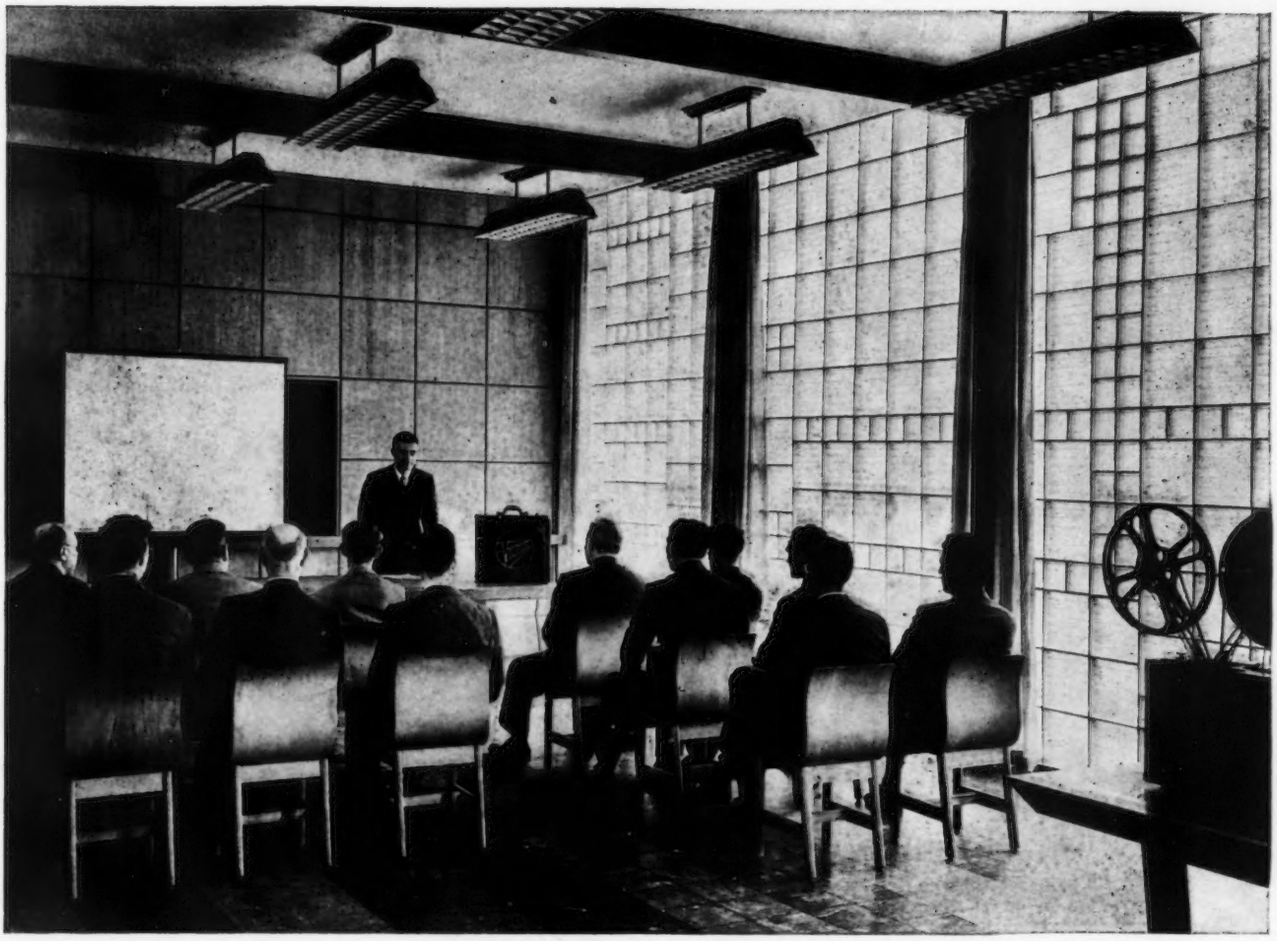

Note the unusual use of 12″ and 6″ square Insulux Glass Block in the floor-to-ceiling panel in this conference room. Architects Perkins, Wheeler & Will, Chicago, selected Insulux for Benjamin Electric Mfg. Company's new product development and testing laboratory. Bi-lateral daylighting is accomplished by a clerestory panel of Insulux on wall opposite that shown.

Light subject for careful consideration

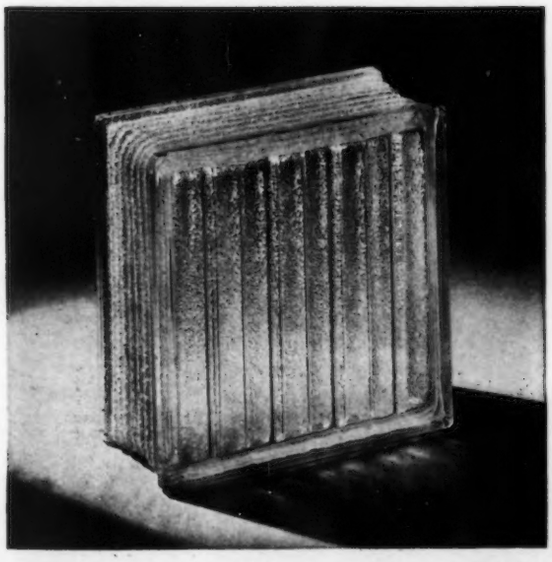

Insulux Glass Block is a functional building material that does many things other materials cannot do. It is in keeping with both traditional and contemporary materials and design. Investigate

Architects find interesting new lighting treatments come easily with Insulux Glass Block.

Insulux has many special properties that merit your careful consideration in any building. Natural daylight can be diffused through areas that are usually gloomy. Furthermore, Insulux reduces sound transmission, preserves privacy, and its high insulating value simplifies heating and air conditioning.

Maintenance expense is remarkably low, because Insulux does not rot, rust or corrode and no painting is needed.

OWENS-ILLINOIS

INSULUX

GLASS BLOCK

Technical data, specifications and installation details will be found in the "Glass" section of Sweet's Architectural Catalog. Or Write Dept. C-12, Owens-Illinois Glass Company, Insulux Products Division, Toledo 1, Ohio.

CARDOX Fire Protection Costs Less Than Cross-Fingered Optimism

● With full recognition of the place for, and value of, all fire extinguishing equipment . . . many plants have major danger spots "protected" by equipment that's simply inadequate for the job.

The distinctive Cardox method of control and engineered application of carbon dioxide . . . stored at 0° F. and relatively low pressure in a single Storage Unit *containing from ¼ to 125 tons* of fire-smothering Cardox CO_2 . . . has broadened the protection scope of carbon dioxide. Today this fast-acting, non-damaging medium provides *all* the advantages of CO_2 extinguishment for tough fire hazards, large or small, indoors or out.

There may be danger spots in your plant that call for a built-in Cardox System providing tons of fast-action carbon dioxide for protection of one or many hazards; other hazards that can best be protected by a Cardox Fire Truck that puts tons of CO_2 on swift wheels, or the 750 pound capacity Cardox Transitank now available in many parts of the country.

Write today for details on how Cardox's broadened application of carbon dioxide can best be utilized for specific operations in your plant.

CARDOX CORPORATION
BELL BUILDING • CHICAGO 1, ILLINOIS
District Offices: New York • Philadelphia • Pittsburgh • Cleveland
Detroit • St. Louis • San Francisco • Los Angeles • San Diego

FIXED FIRE EXTINGUISHING SYSTEMS | FIRE TRUCK—Tons of CO_2 on Wheels | AIRPORT FIRE TRUCK | TRANSITANK—Capacity—750 pounds

CARDOX

CO_2 FIRE EXTINGUISHING SYSTEMS

ARCHITECTURAL METALS

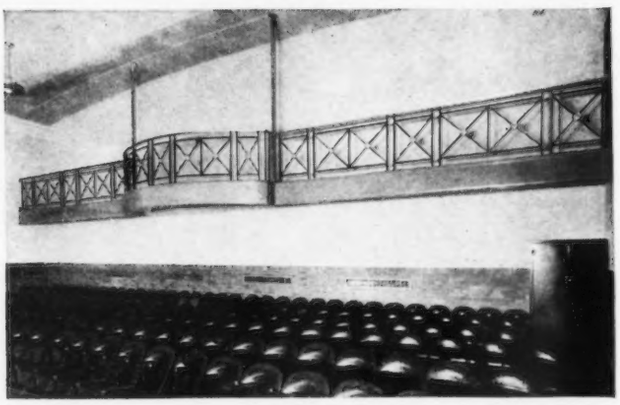

combine Beauty with Utility in

BALUSTRADES • BANK FIXTURES • DOORS
GRILLES • ENTRANCES • STAIRWAYS
STORE FRONTS • STATUARY • TABLETS
HAND RAILINGS • SPANDRELS • WINDOWS
MISCELLANEOUS METAL WORK

For Directory of Leading Metal Fabricators write to Dept. AR12

NATIONAL ASSOCIATION OF
ORNAMENTAL METAL MANUFACTURERS
209 Cedar Avenue, Takoma Park, Washington 12, D. C.

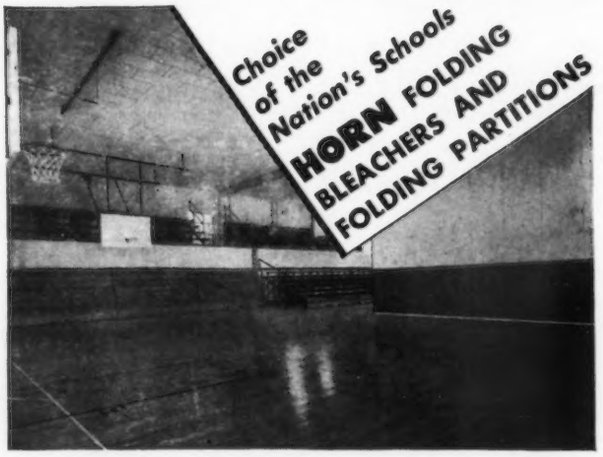

See Horn details and specifications in Sweet's Catalog.

Horn Folding Bleachers and Electrically Operated Folding Partitions provide flexibility of gym layout that enables you to have two complete playing courts at the cost of one. For safety, smooth operation and dependability specify Horn equipment. Your Architect recognizes the superiority of Horn engineering.

HORN MANUFACTURING COMPANY
FORT DODGE, IOWA

Why they specified *Steel* Pipe for this Radiant Heating System

WHY U·S·S NATIONAL PIPE IS BEST FOR RADIANT HEATING

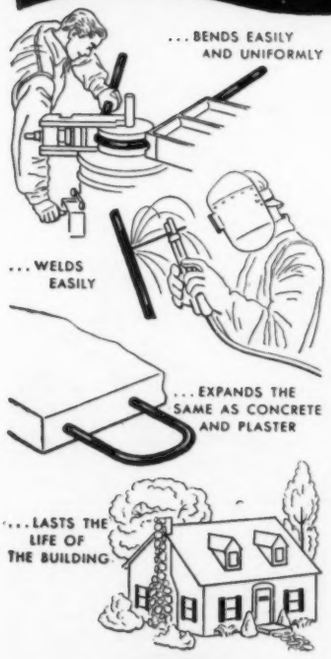

NATIONAL ...
America's Preferred Steel Pipe

STEEL pipe has all the necessary qualities to make it ideal for radiant heating, and, at lowest cost. It is easy to bend, easy to weld, saves time on the job, and like concrete reinforcing bars, it expands at the same rate as concrete and plaster, assuring a sound, reliable installation. And, further, as heating engineers know, steel pipe in hot water heating systems usually outlasts the useful life of the building.

With NATIONAL Steel Pipe you also get the additional values of the Scale-Free and Spellerizing Processes. This means the interior surface of the pipe is smooth, free from mill scale, with minimum frictional resistance. You also get increased corrosion resistance, a plus factor even though corrosion is inconsequential in radiant heating. What's more, the extra rolling NATIONAL Pipe receives in the Scale-Free Process increases the weld strength approximately 20 per cent and thus improves the bending properties.

In other words, the same steel pipe that has been used for over half a century so predominantly for conventional hot water and steam heating systems, is proving equally satisfactory for radiant heating. That's why architects, engineers and contractors are increasingly specifying U·S·S NATIONAL Steel Pipe. For low cost, easy installation and reliability in service, no other pipe possesses all the advantages of NATIONAL Steel Pipe for radiant heating service.

Write for our Bulletin, "Radiant Heating with NATIONAL Pipe", which gives detailed information.

NATIONAL TUBE COMPANY
PITTSBURGH, PA.

Columbia Steel Company, San Francisco, *Pacific Coast Distributors*
United States Steel Export Company, New York

UNITED STATES STEEL

For 70 years a leader in the progressive development of Steel Roof Trusses

• FREESPAN Steel Roof Trusses, in 25 ft. to 59 ft. lengths.

• BOWSTRING Steel Roof Trusses, for clear spans up to 130 ft.

Mesker products and Mesker service are your partners in planning for simplified economical, durable structures of steel. You can give your clients the assurance of dependable roof construction when you specify MESKER scientifically designed steel roof trusses. At the same time you can expand your share of new building opportunities with the wide range of Mesker styles and sizes that permit unusual flexibility for building designs to meet varying requirements for industrial and commercial use. If you don't have the current Mesker catalogs write at once for your copies.

Take Advantage of Mesker's Consulting Service FREE to Architects and Engineers

STEEL ROOF TRUSSES • AIRPLANE HANGARS • ALL TYPES OF STRUCTURAL STEEL • PREFABRICATED SECTIONAL STEEL BLDGS.

GEO. L. MESKER STEEL CORP.
EVANSVILLE 8, INDIANA, U.S.A.
FOUNDED 1879

NEW YORK:
M. B. Kolb Co.
250 W. 57th St., N.Y.C. 19

CHICAGO:
Branch-Nicoloff Co.
549 Washington Blvd., Chicago 6, Ill.

WEST COAST: Industrial Steel Bldgs. Co., 341 S. Central Ave., Los Angeles 13

Banish . . . . . BLUEPRINT BLUES!

in 1/5 the time — save up to 80%
MAKE PRINTS — BLUEPRINTS — PHOTOPRINTS!

IN your own plant, office, drafting room — in a few minutes, anyone, any time can make exact duplicates of drawings, tracings, graphs, letters, etc. — with the modern duplicating method, the TORNADO Duplicator!

Compact, attractive, convenient, simple to operate, it plugs into any electric outlet — and in a few minutes the most inexperienced operator can make perfect prints! Makes reprints up to 24" x 34". Timing device insures uniform prints. Investigate this modern, low-cost method.

Write for details and demonstration

BREUER ELECTRIC MFG. CO.

5128 N. Ravenswood Avenue • CHICAGO 40, ILLINOIS

The Lord Baltimore Hotel, Baltimore's largest, always has upheld this tradition. 700 comfortable rooms . . . all the facilities and services that travelers expect . . . and a genuine willingness to please each guest . . . have made it "Host to Most Who Visit Baltimore."

THE

Lord Baltimore Hotel

BALTIMORE AT HANOVER • BALTIMORE 3, MD.

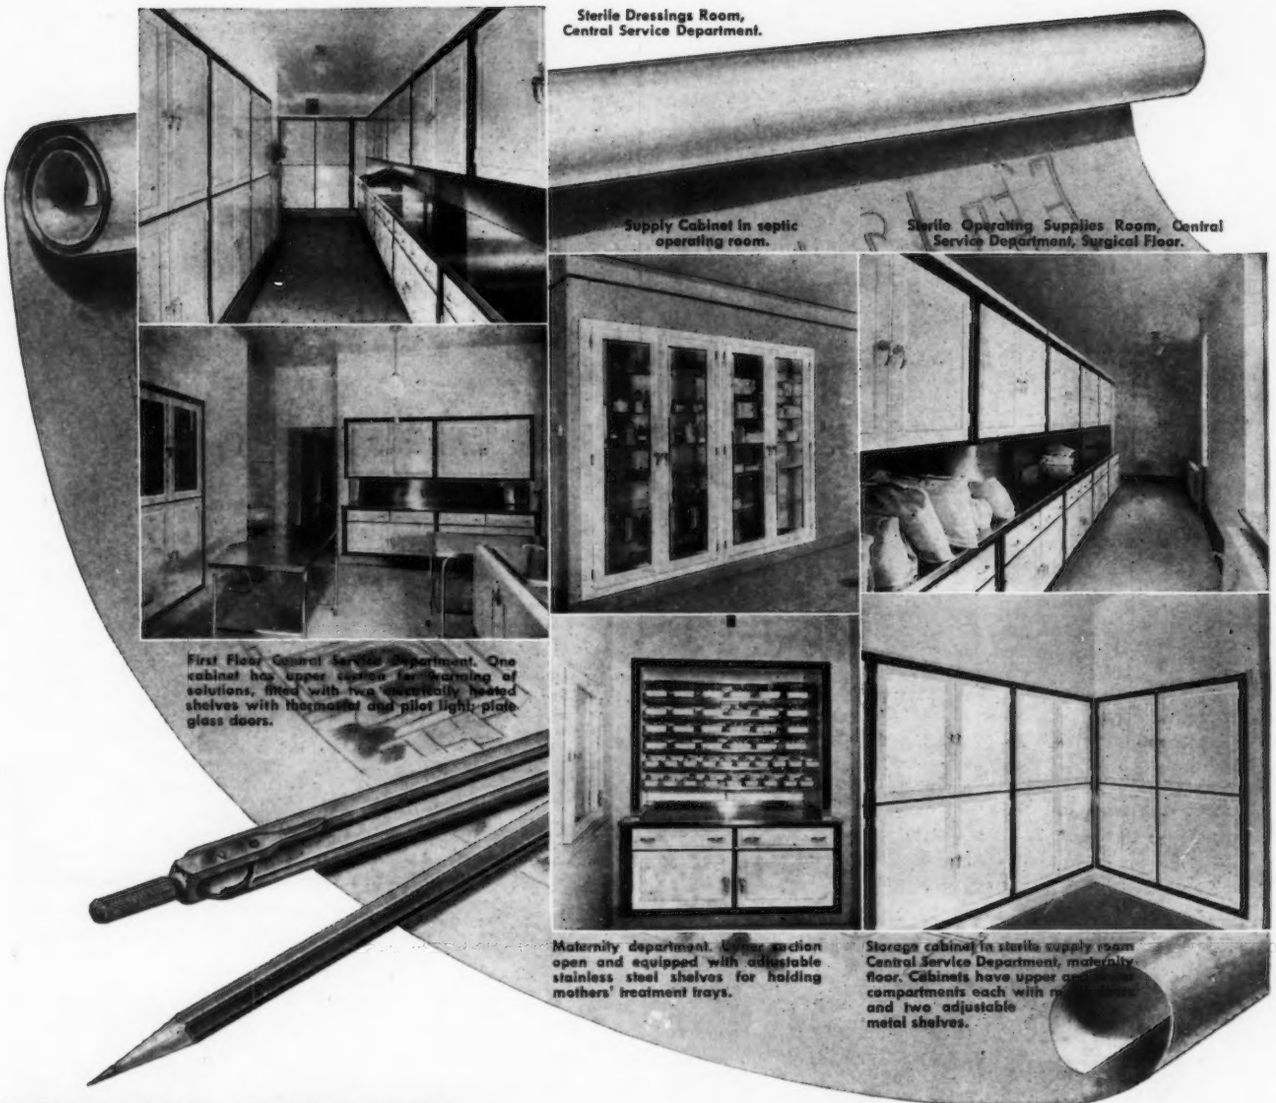

Sterile Dressings Room, Central Service Department.

Supply Cabinet in septic operating room.

Sterile Operating Supplies Room, Central Service Department, Surgical Floor.

First Floor Central Service Department. One cabinet has upper section for warming of solutions, fitted with two electrically heated shelves with thermostat and pilot light; plate glass doors.

Maternity department. Upper section open and equipped with adjustable stainless steel shelves for holding mothers' treatment trays.

Storage cabinet in sterile supply room Central Service Department, maternity floor. Cabinets have upper and lower compartments each with metal doors and two adjustable metal shelves.

RECESSED CABINETS

Important factors in planning the modern hospital— Specify Scanlan-Morris

Typical of the trend in the planning of modern hospitals are these photographs of Scanlan-Morris recessed cabinets built into St. Nicholas Hospital, Sheboygan, and St. Alphonsus Hospital, Port Washington, Wis. In addition to the cabinets shown, other Scanlan-Morris cabinets in these hospitals are:

1. Recessed combination cabinet for storage and for warming of solutions and blankets — in main corridor of maternity department near Central Service Room and delivery rooms.
2. Recessed supply cabinets in unsterile work room, Central Service Department, surgical floor.
3. Recessed supply cabinet in surgical corridor.
4. Recessed cabinets in splint room, surgical floor — three equipped with swinging type harness hooks for splints and fracture equipment; others with metal shelves and plaster barrel compartments.
5. Recessed cabinets, counter type, in unsterile work room of Central Service Department — stainless steel counter tops.
6. Counter type cabinets for soiled utensils, equipped with double sink — in maternity department.

Scanlan-Morris recessed cabinets, each cabinet custom built from plans and specifications covering the individual requirements of the hospital, are installed in many leading hospitals.

The cabinet bodies are made of 20 gauge furniture steel. All corners are made with double lapped and sweated seams, insuring dust-proof construction. Frames are flat steel, electrically welded to insure maximum strength and rigidity. The cabinets may be finished in any color to harmonize with the color of walls and other equipment. Fittings are finished in nickel plate or chromium plate, as specified.

Years of designing and manufacturing experience and contact with surgeons, hospital superintendents, engineers and architects, qualify our Technical Sales Service Department to give valuable assistance and authentic guidance in hospital planning. Suggested layouts supplied without obligation.

Ohio Chemical

MANUFACTURERS OF MEDICAL APPARATUS, GASES AND SUPPLIES FOR THE PROFESSION, HOSPITALS AND RESEARCH LABORATORIES

GENERAL OFFICES · 60 EAST 42ND STREET, NEW YORK 17, OHIO N. Y.

Stains That Protect . . . Stains That Endure

Cabot's quality stains give long-lasting protection because they contain a high proportion (60% to 90%) of undiluted creosote oil, the best wood preservative known. Rich non-fading colors bring out all the natural beauty of the wood. Cabot's Stains range from clear brilliant hues to weathering browns and grays. And Cabot's Stains cost half as much as good paint . . . do not peel or blister, even on green lumber.

FREE BOOKLET, "Stained Houses", contains complete information and illustrations. Send for it today! Samuel Cabot, Inc., 1288 Oliver Bldg., Boston 9, Mass.

CABOT'S Creosote SHINGLE STAINS



THE BURT MONOVENT FUNCTIONS AS A GIGANTIC ROOF RIDGE VALVE

Where heat and fumes must be exhausted the entire length of a building, the Burt Monovent Continuous Ridge Ventilator is the efficient and economical solution to ventilating problems. Designed to install along the roof ridge, it harmonizes with roof lines for better appearance than unit ventilators. It is weatherproof, simple to operate and maintain. Monovents are serving industry in installations from one foot to a thousand feet in length—from 4″ to 96″ throat sizes. . . . See Sweet's or write—now—for data and catalog sheets on the Monovent and other Burt Ventilators.

THE BURT MFG. CO.
ROOF VENTILATORS • OIL FILTERS
EXHAUST HEADS
48 East South St., Akron 11, Ohio

SEND FOR CATALOGS
Burt Engineers are glad to help on plans

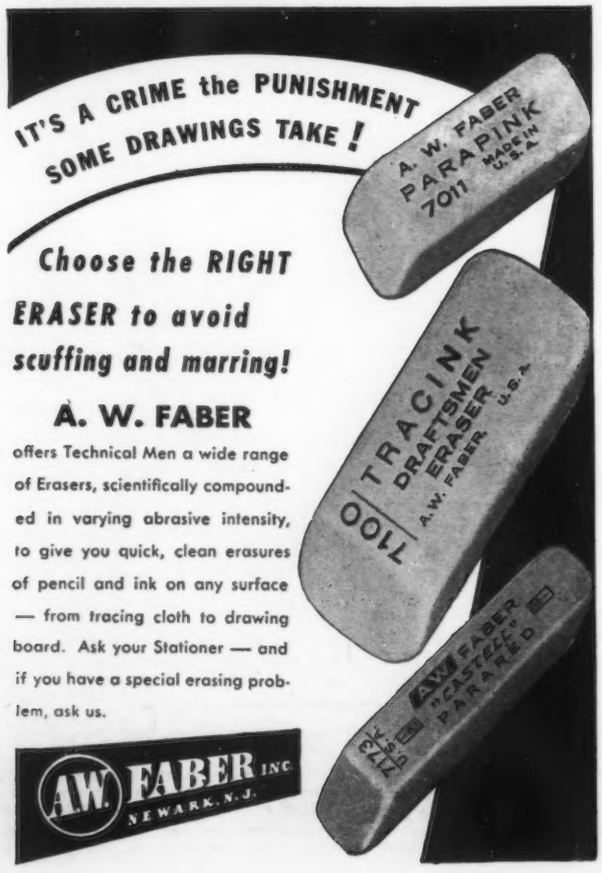

Choose the RIGHT ERASER to avoid scuffing and marring!

A. W. FABER

offers Technical Men a wide range of Erasers, scientifically compounded in varying abrasive intensity, to give you quick, clean erasures of pencil and ink on any surface — from tracing cloth to drawing board. Ask your Stationer — and if you have a special erasing problem, ask us.

A.W. FABER INC
NEWARK, N.J.

CUTLER

U. S. MAIL CHUTES & BOXES

in Bronze, Nickel Bronze, Aluminum, or Enameled Steel, maintain the Cutler Tradition of Fine Workmanship.

Catalog in Sweets

ESTABLISHED 1883
Cutler Mail Chute Co
ROCHESTER 7, N.Y.

Where your plans specify walls and ceilings of

MILCOR Metal Lath and Plaster...

—you provide the advantages of

fire-safety . . . permanence . . . lasting beauty

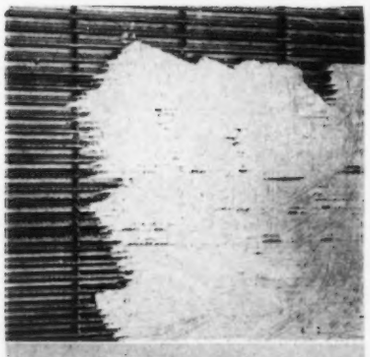

• Above: The scratch coat is forced through Milcor Metal Lath so that it is keyed on both sides of the steel reinforcing.

• Below: Note how the back surface of plaster on Milcor Metal Lath becomes permanently "clamped" to the steel.

ON the drafting board, Milcor Metal Lath gives you unlimited freedom to develop structural forms and shapes.

On the job site, Milcor Metal Lath provides maximum rigidity with light weight. The whole wall and ceiling is held together in one fire-resistant monolithic slab, free from cracking, warping, and shrinking tendencies.

Although not plentiful today, metal lath is more easily obtained than substitutes which do not have the fire-safety, permanency, or vermin-resistance of steel . . . and which have never equalled metal lath as a satisfactory plaster base.



Milcor Netmesh Metal Lath

Steel-reinforced plaster faithfully expresses your conception of form and color tone. The entire plastered surface remains at practically the same temperature, thus avoiding condensation and resultant plaster blemishes such as lath streaks. The plaster stays new-looking longer, a credit to your reputation.



Milcor Specialmesh Metal Lath

Consult the Milcor catalog in Sweet's. Or write today for the Milcor Manual.

F-268

MILCOR STEEL COMPANY

MILWAUKEE 4, WISCONSIN

Baltimore 24, Md. • Buffalo 11, N. Y. • Chicago 9, Ill.
Cincinnati 25, O. • Cleveland 14, O. • Detroit 2, Mich.
Kansas City 8, Mo. • Los Angeles 23, Calif. • Rochester 9, N. Y.

D.I.P.

TRADE MARK

DURANT INSULATED PIPE

the ORIGINAL

Pre-sealed insulated Pipe for

STEAM, HOT WATER, REFRIGERATION

Whether for underground or exposed work DURANT Insulated Pipe offers the uniform protection that permanent water-proofing and maintenance-free service for steam, hot-water and refrigeration lines require. Illustrations at left show simplicity of field assembling. 1. Joint ready for inspection. 2. Joint covered with standard pipe insulation. 3. DURANT joint casing in place ready for asphalt. 4. Asphalt poured into slot making perfect seal.

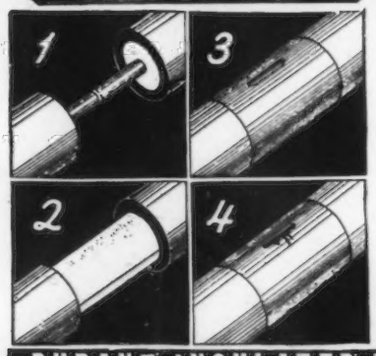

PRE SEALED

WRITE FOR FULL PARTICULARS

TRADE MARK

DURANT INSULATED PIPE COMPANY

1015 RUNNYMEDE ST. PALO ALTO CAL.

Available Now!

CHENEY FLASHING

3-Way Bond

16 OZ. COPPER

CHENEY FLASHING REGLET

16 OZ. COPPER

CHENEY FLASHING is again being made by the original inventor who pioneered the art of thru-wall flashing eighteen years ago.

No thru-wall flashing can operate successfully unless it has the two very important features that are found in CHENEY FLASHING — proven weep-hole drainage and the three-way bond, vertical as well as longitudinal and lateral.

Remember, the inferior two-way flashings, crimped copper and membranes, have neither the vertical bond nor do they drain moisture from the wall fast enough. Furthermore, their first cost advantage has disappeared because today Cheney Flashing is no longer a specialty—it's a standard commodity.

WRITE FOR DESCRIPTIVE FOLDER Dept. R

CHENEY INDUSTRIES, Trenton, N. J.

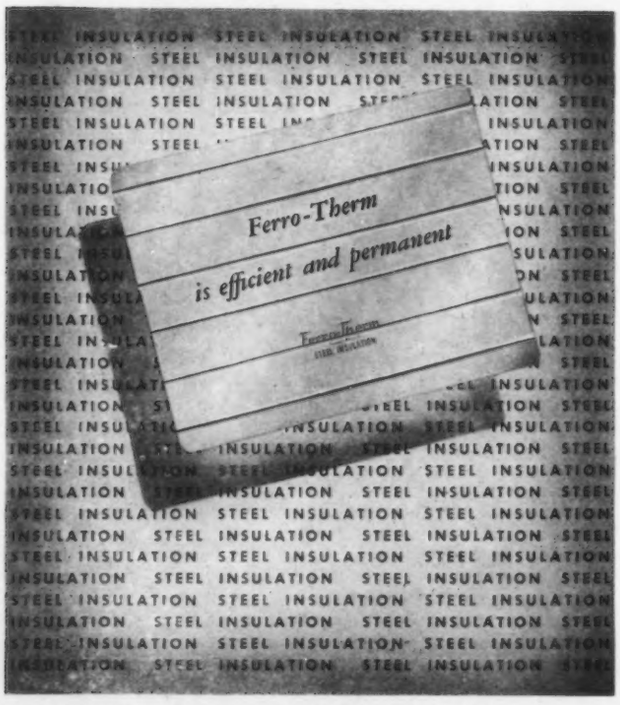

AMERICAN FLANGE & MANUFACTURING CO., INC.
Ferro-Therm Division, Dept. AR-12
30 Rockefeller Plaza, New York 20, N.Y.

Please send me, without obligation, complete information on Ferro-Therm Steel Insulation.

Name .....
Firm .....
Street .....
City ..... Zone..... State .....

Get a

CABLE SELECTION CHART

PLUS a complete listing of the principal Okonite and Hazard insulated wire and cable products. Get them in the just-off-the-press bulletin OK 1031, which gives you in only eight pages an over-all picture of a comprehensive line of products based on a specialized insulation and cable-making experience since 1878. Use it as a catalog, as a guide, as a reference. Write for your copy now. The Okonite Company, Passaic, New Jersey.

OKONITE insulated wires and cables

4853

Solve THE "PERMANENT FIT" PROBLEM . . .

Rusco provides screens, storm sash and weatherproofing all in one permanent unit . . . with nothing to change . . . nothing to store . . . plus year-round, draft-free, rainproof, filtered, screened ventilation.

The Rusco Patented Closure Strip or Sub-Frame automatically adjusts to contraction, expansion and settlement . . . weatherproofs entire window opening. Patented seep-hole sill drainage protects against sill decay and water damage.

Window frame "floats" in insulating air space. Perfect fit is assured under all conditions. Ends costly repairing and refitting.

RUSCO ALL METAL Self Storing COMBINATION SCREEN AND STORM SASH!

Rusco Combination Windows are designed and constructed for PERMANENCY. They're made of rust-resisting, galvanized and Bonderized steel . . . finished with finest quality baked-on enamel. Plastic screen never needs painting . . . will not stain woodwork or masonry.

Rusco Windows harmonize with all types of architecture . . . give interesting shadow lines because they fit flush with window frames.

Rusco is the "tailor-made" Insulating Sash . . . for all types of commercial or domestic architecture. In design and construction . . . in final benefits to the owner . . . it offers greater advantages in comfort, convenience, safety, economy and beauty. Manufactured by the pioneer in "window conditioning" . . . the first manufacturer to produce a practical all-metal self-storing combination screen and storm window.

You can specify it with confidence. Engineering data and specifications can be found in Sweets 18a-7. Descriptive literature is available upon request.

THE F. C. RUSSELL CO.
6400-AR HERMAN AVENUE • CLEVELAND 2, OHIO
Manufacturers of the famous Rusco All-Metal Venetian Awning
©TFCRC

"Always one step ahead of the weather" with
RUSCO

Brasco
MODERN STORE FRONTS

A Complete Line for Every Design

- SMART, MODERN STYLE
- PERMANENT BEAUTY
- ENDURING STRENGTH
- ASSURED GLASS SAFETY
- HEAVY-GAUGED METALS
- SOUND ENGINEERING
- 30 YEARS' EXPERIENCE

National Distribution Assures Effective Installation

BRASCO MANUFACTURING CO.
HARVEY · (Chicago Suburb) · ILLINOIS

That OUTSIDE LOOK

Beautify! Preserve! Protect!

CREO-DIPT STAINS
FOR WOOD SHINGLE ROOFS AND SIDE WALLS

CREO-DIPT
COMPANY, INC.
Established 1911
NORTH TONAWANDA, N. Y.

OLSONITE *Plastic Seats*

Always Specify

Olsonite

COSTS LESS Latest electronic manufacturing methods plus high volume production put Olsonite ahead of the field both in low unit cost and in speed of delivery.

LOOKS BETTER Olsonite will not chip or mar and resists acid or cigarette burns. Non-corrosive brass hinges are covered with Olsonite so that no metal is exposed.

LASTS LONGER *Solid homogeneous plastic* construction has no core to split or warp. There are no joints, seams or crevices to give way.

WRITE DEPT. AR 12 FOR INFORMATION

Swedish CRUCIBLE STEEL COMPANY
PLASTICS DIVISION
8561 BUTLER AVENUE · DETROIT 11, MICHIGAN

IN A SOUND OR MUSIC DISTRIBUTION SYSTEM,

Quality Counts

For highest quality, select

Western Electric

Distributed by GRAYBAR
OFFICES IN 92 PRINCIPAL CITIES

SAVE TIME AND MONEY WITH

PC FOAMGLAS INSULATION

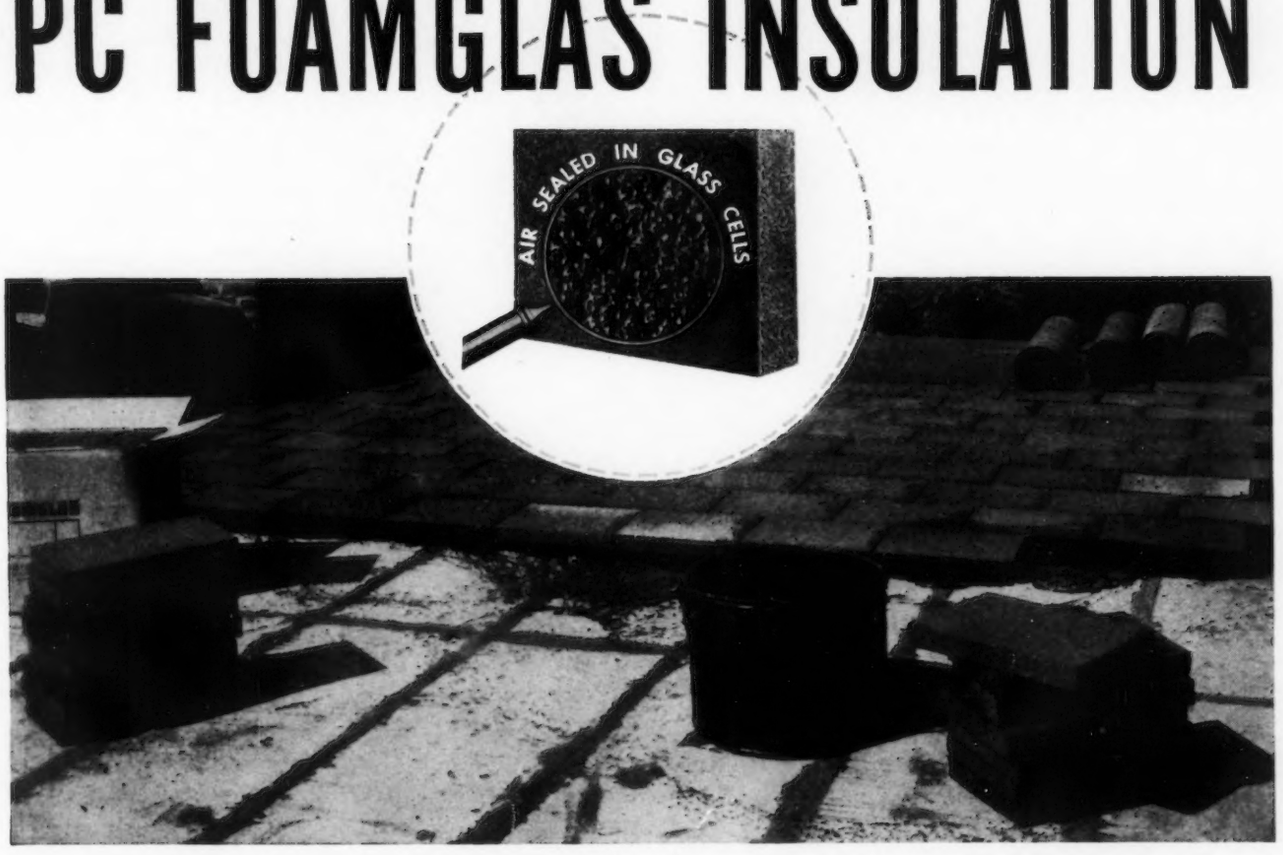

AN important cost factor in insulating jobs is the labor cost of installing the insulating material. And men who have used many kinds of insulation can tell you that PC Foamglas is so light in weight, so conveniently packaged, that it can be installed more quickly by fewer men — saving both time and money.

PC Foamglas, the cellular glass insulation, is fireproof, waterproof and verminproof. It is unaffected by excessive humidity, impervious to common acids. It therefore retains its original insulating efficiency indefinitely, without repairs or maintenance. That means protection against the additional cost which is incurred when defective insulating material has to be torn up and replaced.

In walls and floors, on flat deck roofs, of all sorts of plants all over the country, PC Foamglas is helping to maintain desired temperature levels, to minimize condensation, economically, *permanently*.

You will find a lot of helpful information in our manuals on PC Foamglas insulation. Lavishly illustrated, they contain valuable engineering data, tables, charts and installation details. Check your choice on the convenient coupon, mail it to us and free copies of our booklets will be sent to you promptly, without obligation. Pittsburgh Corning Corporation, Room 194, 632 Duquesne Way, Pittsburgh 30, Penna.

· Also Makers of PC Glass Blocks ·

PC FOAMGLAS *Waterproof Fireproof* **INSULATION**

T. M. REG. U. S. PAT. OFF.

LIGHT IN WEIGHT, rigid and strong, PC Foamglas is conveniently packaged for easy handling on the job. It can be installed quickly by minimum crews, thus saving time and labor cost.

Pittsburgh Corning Corporation
Room 194, 632 Duquesne Way
Pittsburgh 22, Pa.

Please send me without obligation, your free booklets on the use of PC Foamglas insulation for:

Roofs_____ Walls_____ Floors_____

Name_____

Address_____

City_____ State_____

PLUS its cost and space saving features . . .

Of all Electronic Organs
only the

WURLITZER ORGAN

Series 20 Conforms Strictly to A.G.O. Requirements

ORGAN DIVISION
The Rudolph Wurlitzer Co., N. Tonawanda, N. Y.

the **LUMINALL** line of interior flat wall paints

LUMINALL . . . has casein binder for extra light reflection

ULTRA LUMINALL . . . has synthetic resin binder for extra washability

FREE . . . Send for fully illustrated 24-page book, "Painting for Light & Decoration."

NATIONAL CHEMICAL & MFG. CO.
3627 South May Street, Dept. G, Chicago 9, Illinois

Factories: Chicago, Ill., Brooklyn, N. Y.
Distributors in all principal cities

EBERHARD FABER
ERASERS for
Clean Corrections

to SATISFY
critical standards for cleaner tracings—specify and use Erasers bearing the Ouality name of EBERHARD FABER. Sold everywhere, for every use and for every kind of paper surface.

Decorative Utility

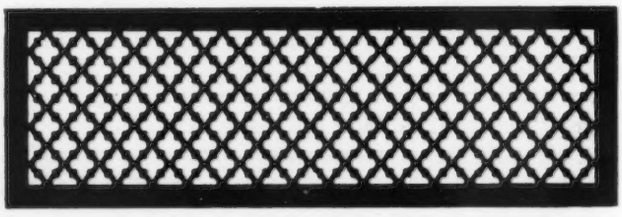

HENDRICK GRILLES offer a wide choice of attractive designs with ample open areas. Perforations are clean-cut, and there are no burrs or other imperfections. Hendrick Grilles are easy to install, and always lie flat because of a special flattening operation in their manufacture.

The grille illustrated is the Gothic Clover Leaf. Write for information on the hundred other distinctive patterns.

Perforated Metals
Perforated Metal Screens
Architectural Grilles
Mitco Open Steel Flooring,
"Shur-Site" Treads and Armorgrids.

HENDRICK
Manufacturing Company
38 DUNDAFF STREET, CARBONDALE, PA.
Sales Offices in Principal Cities

FLEXIBILITY *and* STRENGTH *of* RIC-WIL CONDUIT PERMITS SHALLOW INSTALLATION *of* STEAM LINES

-even under Railroad Loadings

Underground steam line between RR sidings with expansion loop extending under tracks.

21 ft. Ric-wiL Prefabricated Insulated Pipe unit lowered into trench alongside tracks at RR passenger station without interrupting rail traffic.

The heavy-gauge helically corrugated shell used in Ric-wiL Prefabricated Insulated Pipe Units makes possible a resilient construction of high beam strength, which can safely be installed under E72 RR loadings with only 3 feet of ground cover, and under E90 loadings with only 5 feet. Because of this and other exclusive Ric-wiL features, the trend of engineering departments of railroads is to specify Ric-wiL for all underground steam lines. It is possible to jack Ric-wiL through existing right-of-ways and to install steam lines without disturbing sidewalks, pavement or tracks and without permanent deformation of roadbeds, thus saving both installation and maintenance expense.

Secret of the strength and flexibility of Ric-wiL units is in these corrugations. Seam-welded, helically corrugated, heavy gauge galvanized iron shell with full round smooth ends and special Ric-wiL coupler, provide pressure-tight construction.

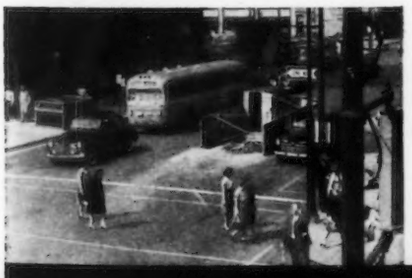

(Left) Normal traffic was maintained on this busy downtown street while Ric-wiL units were installed under pavement. Units were jacked through from building basements and joined to utility's steam main at manhole in center of street. *(Right)* Close-up of manhole showing auger crew and tool for drilling under pavement.

Before you draw up specifications for your next underground steam line, get all the facts about Ric-wiL. Write for catalog.

RIC-WIL INSULATED PIPE CONDUIT SYSTEMS
THE RIC-WIL COMPANY · CLEVELAND, OHIO
AGENTS IN PRINCIPAL CITIES

GRADUAL CONTROL

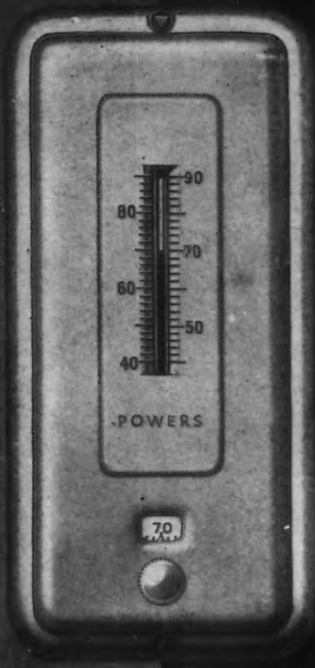

has been an outstanding feature of Powers regulation since 1891. With this type of control, valves or dampers are opened or closed **gradually**, which results in exceedingly close regulation and the maximum of comfort obtainable with automatic control.

● THE POWERS REGULATOR CO., 2752 Greenview Avenue, CHICAGO. Offices in 47 Cities. See your phone book. 43

WRITE FOR BULLETIN NO. 200

POWERS TEMPERATURE and HUMIDITY CONTROL

New Scope for Your Home Planning —with New *Curtis* woodwork

Mantels—entrances—china cabinets—stairways—beautifully proportioned, designed by well-known architects! This new Curtis Woodwork is yours to use in planning more attractive homes. Curtis' wide variety of design fits every taste and meets every building budget. Write for beautifully illustrated literature—and for the name of the Curtis dealer in your locality.

1866 CURTIS WOODWORK

CURTIS COMPANIES SERVICE BUREAU, Clinton, Iowa

SAFETY *Demands a* SECOND CELLAR EXIT!

Install BILCO COPPER STEEL CELLAR BULKHEAD

ATTRACTIVE • FIREPROOF • TROUBLE-FREE
WATERTIGHT • RUST-PROOF

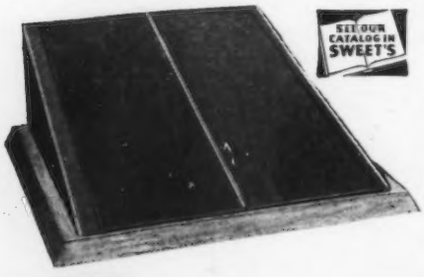

THE useful cellar with workshop and game rooms is complete only if it has exit-to-yard hatchway protected by steel doors that are watertight, fireproof, burglar-proof and rustless. For new homes and wooden door replacement. Easy to install. Last a lifetime.

Automatic Safety Catch

Doors can't be blown or knocked shut

Write for FREE Folder

THE BILCO MANUFACTURING COMPANY
164 Hallock Avenue, New Haven, Connecticut

MAKE 10 TYPES OF PRINTS WITH OZALID MODEL F

- Handles 42″-wide materials.
- Printing speed, 4″ to 72″ per minute. Developing speed, 48″ per minute.
- Width, 68⅜″ — Height, 51⅞″ — Depth (including feed board), 33⅛″.
- Net weight, 725 lbs.—Shipping weight (approx.), 1145 lbs.

With the Ozalid Model F you enjoy the full versatility of the Ozalid Process. You can make positive prints direct from your engineering drawings . . . with lines and images reproduced in black, blue, red, or sepia . . . on paper, cloth, foil, or film.

Thus, you can match print to job at hand; use identifying colors; eliminate redrafting; save time, labor, and materials.

See the 10 types of Ozalid Prints you can make, and learn full story.

Write for free booklet No. 130

OZALID

Division of General Aniline and Film Corporation, Johnson City, New York

Ozalid in Canada—Hughes Owens Co., Ltd., Montreal

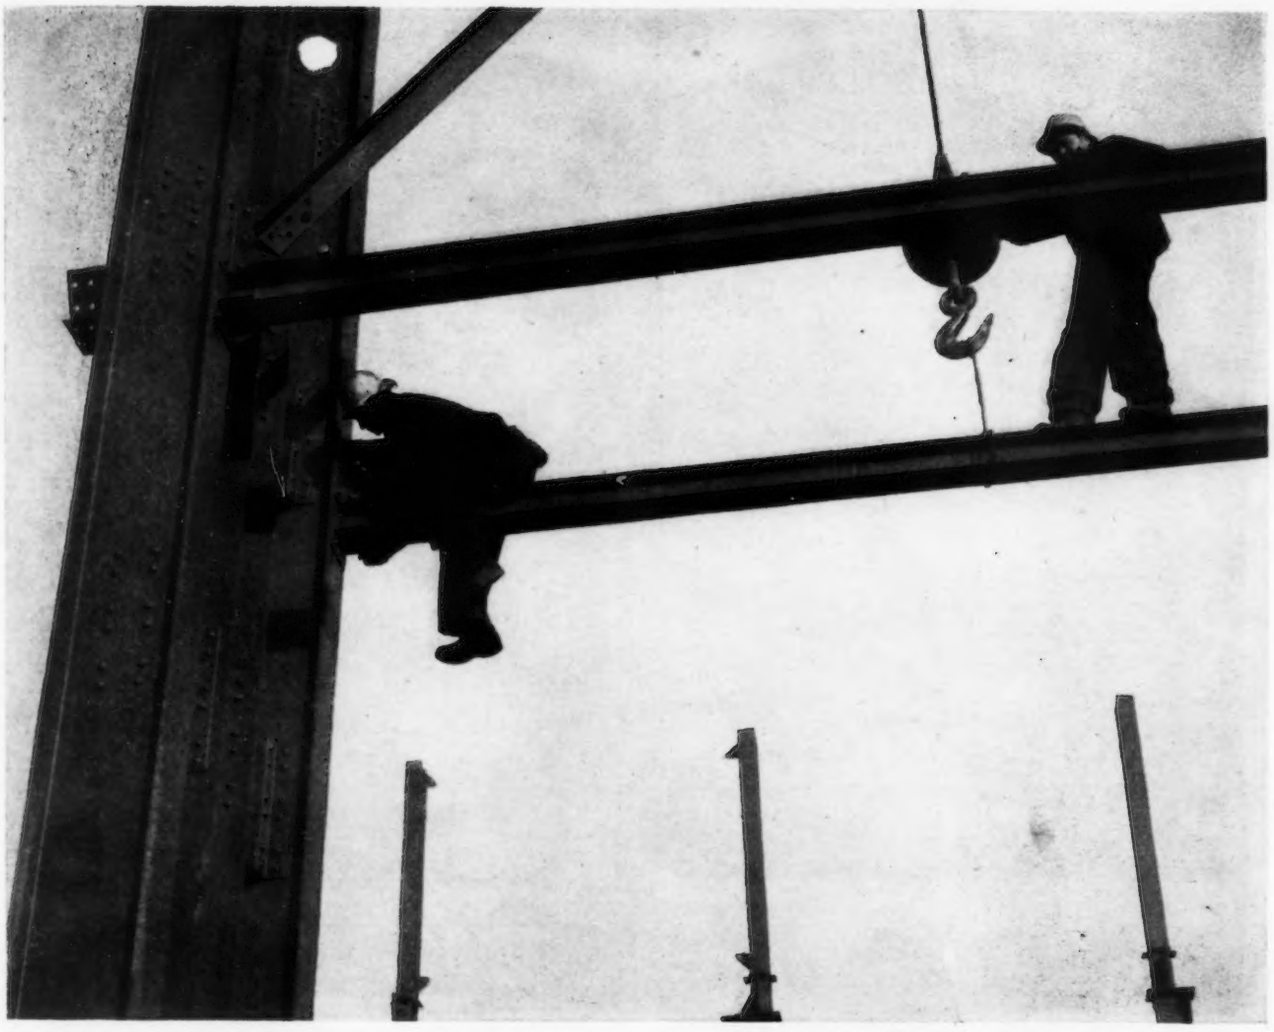

The Shape of Things to Come

Remember when . . . ?

When gaunt, sturdy frameworks of steel—buildings in the making—were a common sight the length and breadth of the land? When structural steel abounded, ready to form the backbone and ribs of skyscrapers, bridges, apartments, hotels?

Bethlehem structural shapes—wide-flange sections, beams, columns, stanchions, joists, and others—were everywhere in evidence, from Maine to California. And, with a postwar building cycle waiting on America's doorstep, these Bethlehem products will again be fully available in quantity to architects and contractors.

BETHLEHEM STEEL COMPANY
BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation

Bethlehem
STRUCTURAL SHAPES

BETHLEHEM STEEL

ARCHITECTS

ANNOUNCING a recent development of a new Cork-Rubber Tile and Abrasive Tile flooring for Industrial, Commercial, and Residential installation.

Watch for further announcement of availability

In the meantime, SEE OUR CATALOG IN SWEET'S displaying our entire line of building products.

Manufacturers of Building Products for over 25 years

SERVICISED PRODUCTS CORP.
6051 West 65th Street, Chicago 38, Ill.

WHICH COLOR?

A "find" for the ARCHITECT!
When your clients ask "What *color* will be best?" you'll have a quick answer in the handsome Moleta COLOR GUIDE.
150 *beautiful colors* are displayed . . . Blues, Greens, Yellows, Grays, Browns . . . every tint from the palest to the darkest!
Formulas are given on the reverse of each color sheet (9" x 15") to show how the shade can be quickly made. Price, $5.00 . . . delivered anywhere in the U.S.A. Write for *your copy*.

MONROE, LEDERER & TAUSSIG, INC.
606 N. AMERICAN STREET PHILA. 23, PA.

Moleta ARCHITECTURAL **FLAT OIL PAINT**
THE TRULY WASHABLE FLAT PAINT

Patented features found only in MALTA Window Frames


MULL CENTER CLAMP


3-WAY JAMB CLAMP



Mull Center Clamp—provides a permanent water-tight sill—Mull Center joint.

Leak-Tight Jamb Clamp—prevents leakage, reinforces frame, prevents jamb from pulling away from sill end.

Overhead Pulley—Makes windows easier to operate. Rope or chain may be used. Pulley easily removed.

Other features include waterproofed and rot-proofed joints, rugged construction of select materials.

No wonder **Malta** Frames are the outstanding window frames buy. Write for catalog that tells all about them in detail.

THE MALTA MFG. CO., MALTA, OHIO Top Quality Frames Since 1901
Malta Frames Cost Less Per Year Of Service

LOOK INSIDE!

...to see why the Bryant Winter Air Conditioner is First Choice

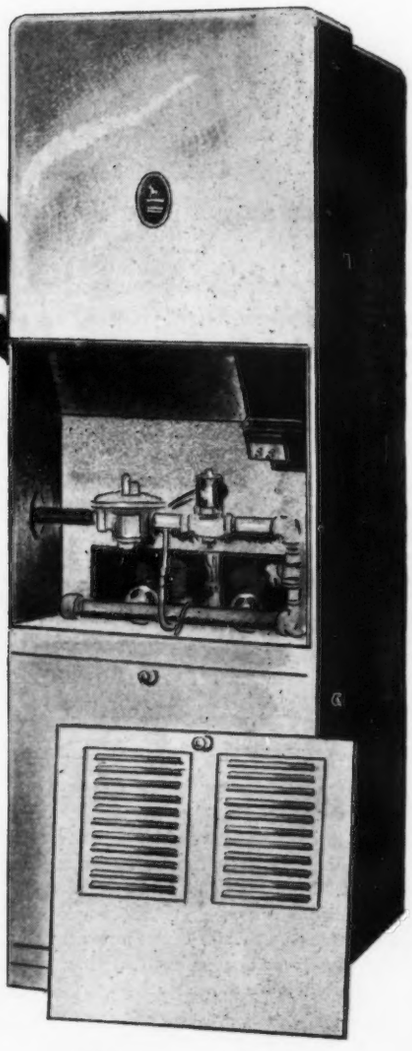

The old adage about beauty being only skin deep doesn't apply to Bryant Winter Air Conditioning, because you'll find real beauty *underneath* the "skin" . . . *inside,* where the process of creating healthy, comfortable, indoor weather takes place. There you will find the precision-designed parts that are built for long life and lasting efficiency . . . sturdy, compact, skillfully fitted to do the best possible winter air conditioning job in a minimum of space. Yes, look inside the Bryant and you will see the features that make it the choice of dealers, builders, architects and engineers and the first choice of thousands of families across the nation.

BRYANT HEATER COMPANY
17825 St. Clair Ave., Cleveland 10, Ohio
One of the Dresser Industries

MODEL BA-88, enclosed in attractive Bryant Grey crackle cabinet, requires little space and is ideal for homes where the heating installation is placed in recreation or basement utility room.

MODEL VB, for homes, offices, stores and apartments—and anywhere that space is at a premium. Slender and compact, this vertical model possesses all the advantages of the BA-88.

bryant
GAS HEATING

LET THE PUP BE FURNACE MAN

The most complete line of gas heating equipment in the nation!

INCLUDE **HAWS** FOUNTAINS IN YOUR PLANS

HAWS MODEL 7D... Vitreous china drinking fountain with the Haws sanitary angle stream, automatic pressure regulator, concealed flow regulator screw. Working parts accessible... without detaching fixture from wall.

Haws

DRINKING FOUNTAINS

... with the shielded stream head, safely guard health by providing fresh, cool drinking water, with complete sanitation. Specify HAWS Drinking Fountains and Electric Water Coolers in the buildings you are planning. They are modern in design, dependable in operation, simply installed and easily maintained. *Write for your copy of the HAWS Catalog today!* The HAWS complete line of drinking water fountains permits the selection of a model and design that will meet your requirements.

HAWS DRINKING FAUCET CO.
1808 HARMON STREET (Since 1909) BERKELEY 3, CALIFORNIA
Agents and Sales Representatives in All Principal Cities

MORE THAN 2700 INSTALLATIONS
Maas Genuine Cathedral Chimes
IN ALL PARTS OF THE WORLD

When you specify MAAS you specify genuine *tubular* cathedral chimes — not imitative, mechanical devices. Their individual damping system means clarity and distinction, with no muddiness or intermingling of notes. . . . A single installation provides not only outside chimes or carillons, but inside organ cathedral chimes as well. . . . Their Bakelite head construction permits great depth of tone. . . . Available in ten models, with sound coverage ranging from 3/8 of a mile to 6 miles or more, MAAS Chimes are adaptable to any building design. . . .

For the leading genuine cathedral chime on the market today, specify MAAS. It will not fail you.

Send for descriptive folder
MAAS ORGAN COMPANY
DEPT. R 3015 CASITAS AVE.
LOS ANGELES 26, CALIFORNIA

MAAS Carillons
GENUINE
CATHEDRAL CHIMES

THE MOST BRILLIANT NAME IN LEAD PENCILS

KOH-I-NOOR

Like the WORLD FAMOUS KOH-I-NOOR DIAMOND, KOH-I-NOOR PRODUCTS have long been famous for their outstanding qualities. Whatever is required in pencil performance will be found in our exceptional quality lines.

Send for your copy of our catalog
KOH-I-NOOR PENCIL COMPANY, INC.
BLOOMSBURY, N. J.

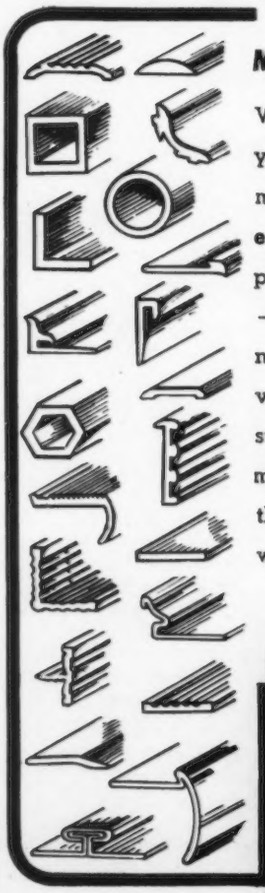

a complete line of
METAL and PLASTIC TRIMS

When you specify S&W Mira-Trim you can select exactly the shape, material and finish you want for **exactly** the accent desired. Miraplas – colorful plastic, Mirachrom – bright aluminum, Miralite – non-rub soft finish, Miravel – velvet finish, Mirasteel – gleaming stainless steel. Use Mira-Trim for modern beauty. Quickly available through local distributors everywhere.

S & W catalogs should be in your file. Sent on request.

S & W
MOULDING CO.
DEPT. E – COLUMBUS 6, OHIO
• The House of Mira-Trim •
IN CANADA – CANADIAN MOULDINGS LTD.
CHATHAM, ONTARIO

Another RECORD "First"!

Out of 443 entries by 157 business publications —

"FIRST AWARD to ARCHITECTURAL RECORD for the best illustrative treatment of editorial material published during the twelve months ending July 31, 1946, in the ninth annual competition conducted by Industrial Marketing."

In the last five years the RECORD has received nine awards for editorial achievement... which makes it easy to understand why the RECORD also is

FIRST in architect circulation!
FIRST in consulting engineer firms!
FIRST in total architect and engineer circulation!

Add to that a provable coverage of over 80% of all building plans and specifications prepared by architects and engineers.

You're RIGHT with the RECORD!

"WORKBOOK OF THE ARCHITECT-ENGINEER"

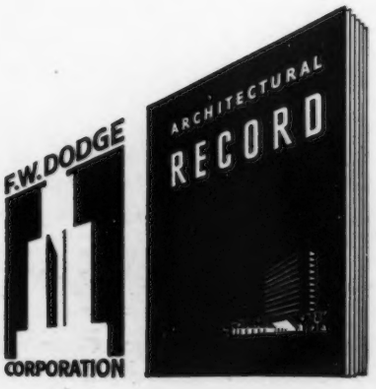

119 WEST 40th STREET, NEW YORK 18, N. Y.

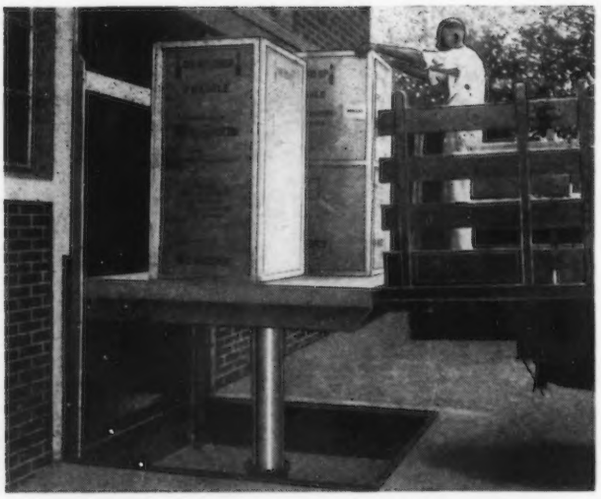

CUT BUILDING COSTS

with new Oildraulic Levelators

Cross loading docks and ramps off your plans by specifying Oildraulic Levelators for modern commercial and industrial buildings. Floors can be poured on grade instead of at railway car or truck bed height. You save space and give clients more efficient buildings at lower cost. Oildraulic Levelators lift loads (up to 50,000 lbs.) quickly to trucks, freight cars or different building levels. Installation simple and inexpensive. Write for Catalog RE-201. ——→

Rotary Lift Co., 1101 Kentucky, Memphis 2, Tenn.

Rotary
OILDRAULIC LEVELATORS

Lockwood

IDENTIFIES QUALITY IN BUILDERS' HARDWARE

LOCKWOOD identifies its Builders' Hardware with this famous Trade Mark. You will find it on cylinder locks and keys, on mortise locks, on door closers . . . a symbol of enduring quality since 1882.

To the Architect the name LOCKWOOD also signifies a line of Builders' Hardware embracing all requirements, characterized by steady advancement in feature and design . . . and a company that never hesitates to give full and prompt co-operation.

We aim to keep it that way. R-1

LOCKWOOD HARDWARE MFG. COMPANY
Division of Independent Lock Company
Fitchburg • Massachusetts

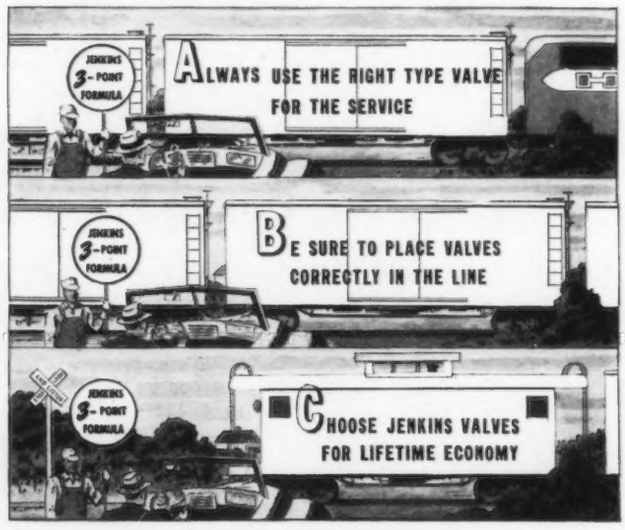

For lowest valve cost in the long run, there's no getting around the logic of this proved ABC Formula, leading architects and engineers agree. Jenkins valve specialists offer practical help on questions of selection or placement. Over 600 patterns. Jenkins Bros., 80 White St., New York 13.

JENKINS VALVES

SINCE 1864

For Industrial, Domestic, Commercial and Institutional Service . . . In Bronze, Iron, Cast Steel, and Corrosion-resisting Alloys . . . 125 to 600 lbs. pressure.

Interior and Display LIGHTING

Send Today for the Century Catalog

of Architectural and Display Lighting

For Designers and Architects

TO ASSIST YOU in specifying lighting instruments engineered on the principle that lighting is a dynamic function of design. We feature: *Accent, Low Brightness Contrast, Control.*

CENTURY Lighting Equipment is ENGINEERED Lighting Equipment

CENTURY LIGHTING, INC.
419 W. 55th Street, New York 19, N. Y.

Angle #2

Some New Angles on INDUSTRIAL and COMMERCIAL HEATING

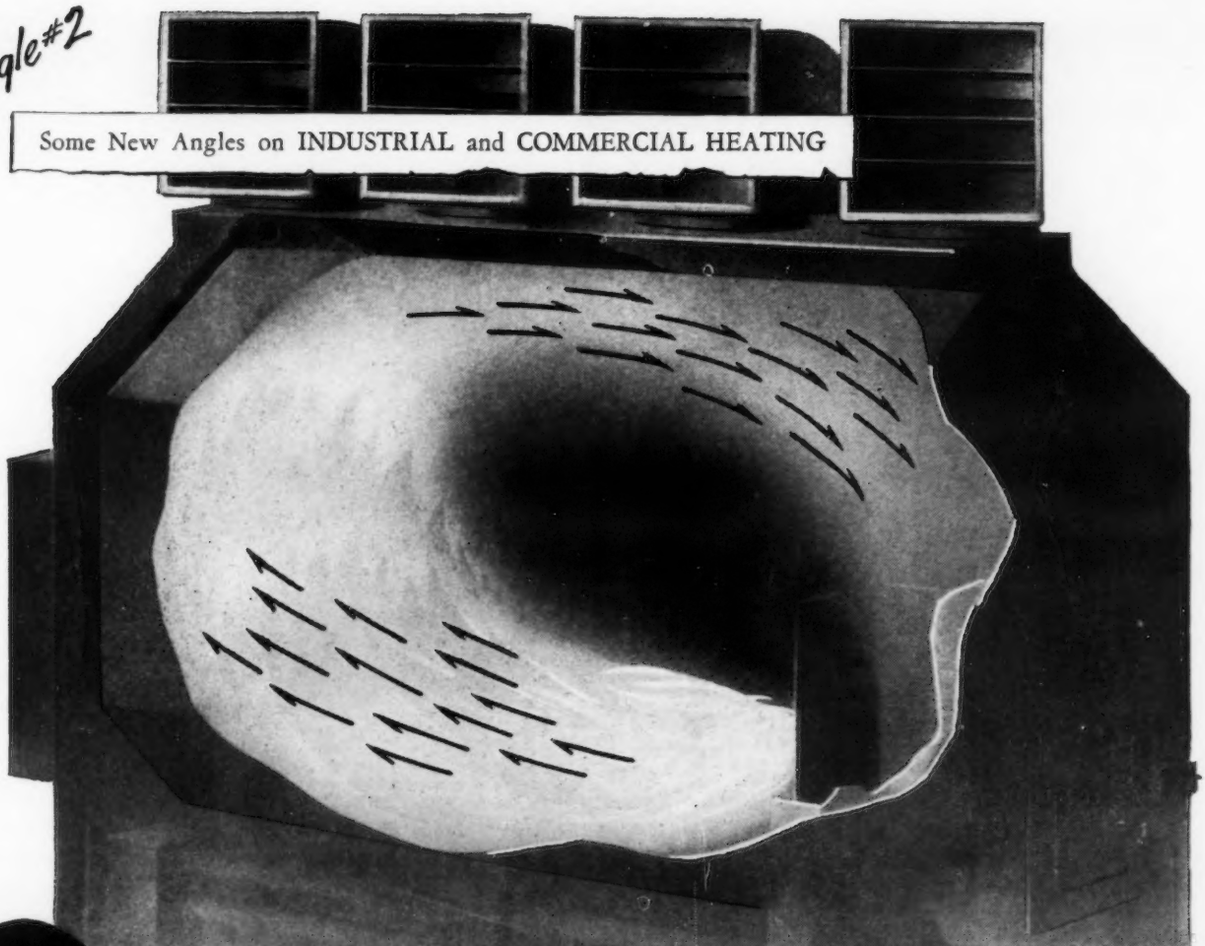

THIS IS COUNTERFLO COMBUSTION

The patented Dravo method of burning gas or oil with maximum efficiency by lengthening flame travel within the combustion chamber of an air heater, thereby allowing time and space for complete combustion is COUNTERFLO COMBUSTION. In this method the products of combustion are in active and intimate contact with the entire surface of a stainless steel combustion chamber, thus insuring uniform heat transfer at all points.

● **DRAVO COUNTERFLO DIRECT FIRED HEATERS offer many advantages for heating of open-spaces in commercial and industrial buildings. Economies resulting from COUNTERFLO COMBUSTION include:**

- **Complete fuel combustion with elimination of CO**
- **Freedom from fuel residue on combustion surfaces**
- **Sustained efficiency of heater at 80-85%**

All the angles of industrial and commercial heating with DRAVO COUNTERFLO DIRECT FIRED HEATERS are described in Bulletin 516. Write Heating Section, Dravo Corporation, 300 Penn Avenue, Pittsburgh 22, Pennsylvania.

DRAVO CORPORATION

PITTSBURGH · WILMINGTON · PHILADELPHIA · WASHINGTON · NEW YORK · CLEVELAND · DETROIT

KIMBERLY
CARBO-WELD
DRAWING PENCILS

22 DEGREES

GENERAL PENCIL COMPANY
67-73 FLEET STREET, JERSEY CITY 6, N. J.

the CONTROLLING FACTOR
to Shower Bathing
PLEASURE and PROTECTION

Josam MODERN anti-scalding
SHOWER MIXING VALVE

NOW AVAILABLE...FOR FURTHER INFORMATION WRITE
JOSAM MANUFACTURING COMPANY
ESTABLISHED 1914
General Offices: 302 FERGUSON BLDG., CLEVELAND 14, OHIO • Plant: MICHIGAN CITY, INDIANA
Representatives in all Principal Cities

Duromit
THE "BONDED" CEMENT FLOOR

DUROMIT is the hardest cement floor in existence. A mixture of hard mineral granules, it registers 9 points on the Mohs Scale of Hardness. Specify DUROMIT, with its three year Bonded Guarantee, for all places subjected to unusual abrasion, excessive moisture, or varied forms of chemical attack. Easily cleaned and highly sanitary, DUROMIT Floors are perfect floors for food processing, dairy and bottling plants, automotive and mechanical establishments, garages, etc.

Write for further information, or phone
Chickering 4-6782

EMPIRE STATE BUILDING — WASHINGTON CONCRETE CO. — NEW YORK N. Y.

The Restoration of
COLONIAL WILLIAMSBURG

A Reprint of the December, 1935 Issue of

ARCHITECTURAL RECORD

104 pages, bound in cloth • $2.00 per copy

The Colonial Williamsburg Number of ARCHITECTURAL RECORD — issue of December 1935 — was sold out soon after publication but the entire editorial contents have been reprinted and bound in permanent book form with blue cloth covers.

Many thousands of these Williamsburg reprints have been sold but the demand continues unabated.

ARCHITECTURAL RECORD
119 W. 40th Street, New York, N. Y.

Enclosed is $.....for which send.....copies of your reprint, *The Restoration of Colonial Williamsburg*, bound in cloth, at $2.00 per copy.

Name.....

Address.....

City and State.....A.R. 12-46

GIVE FIRE A FIVE MINUTE START in an unprotected plant or warehouse and you can count on a crippled or destroyed business. "Fireproof" construction will not prevent burning contents from reducing a structure to twisted steel and broken cement.

FIRE CAN BE CONTROLLED. Fortunately there is one proved way of checking this needless destruction *at the source, when it starts* . . . a Grinnell Automatic Sprinkler System. Protect your buildings from this commonest of all hazards. See that they have this 24-hour-a-day protection. Experienced engineers at nearby Grinnell offices will help.

GRINNELL COMPANY, INC.
Executive Offices: Providence 1, R. I.
Branch Offices in principal cities.

GRINNELL

AUTOMATIC SPRINKLER FIRE PROTECTION

SPOT
REG. U.S. PAT. OFF.
SASH CORD

is
TOPS
in *Value*

SAMSON CORDAGE WORKS
BOSTON 10, MASS.

STANDARD for EFFICIENCY

JAMISON-
BUILT COLD STORAGE DOORS
HAGERSTOWN, MARYLAND

Branches in Principal Cities



Balsam-Wool
APPLICATION DATA SHEETS . . .
YOURS FOR THE ASKING

Unusual applications of Balsam-Wool Sealed Insulation—details difficult to obtain elsewhere—are contained in this series of Balsam-Wool Application Data Sheets prepared by the makers of the original sealed blanket type insulation. A complete set of these data sheets is yours for the asking. Write for them.

WOOD CONVERSION COMPANY
Dept. 115-12, First National Bank Bldg., St. Paul, Minn.

BALSAM-WOOL • *Products of Weyerhaeuser* • NU-WOOD

INDEX TO ADVERTISEMENTS

Catalogs of concerns marked (s) are filed in Sweet's File (1946)

NEW YORK — H. Judd Payne, General Manager; Robert F. Marshall, Business Manager; Tom Tredwell, Advertising Mgr.; Benton B. Orwig, Creative Service Manager, 119 West 40th Street; BOSTON — Howard C. Perrine, 855 Park Square Bldg.; CHICAGO — C. B. Riemersma, Jack Casey, 700 Merchandise Mart; CLEVELAND — John C. Jackson, 321 Hanna Bldg.; LOS ANGELES — Robert P. Wettstein, Room 816, 816 West 5th St.; PHILADELPHIA — Tom Tredwell, 1321 Arch St.

Economy and Service Distinguishing PETRO Performance in Big Buildings . . .

. . . also obtained in architect's home

When an architect specifies PETRO oil burning equipment for an important industrial building, he is following the trend to PETRO that has always been noted wherever high efficiency and low operating costs are demanded of an oil burning system.

Architects and heating engineers have preferred PETRO for over forty years. In this convincing manner, they have indicated their unanimous agreement with Mr. J. Floyd Yewell that "Petro Oil Burning Systems possess an attractive record for fuel and labor economy, together with long-term service."

In these words, Mr. Yewell expresses his experience with PETRO in numerous big building installations. This same service and economy distinguish the performance of the PETRO Domestic Oil Burner you will find installed in Mr. Yewell's home.

In every kind of installation . . . from towering skyscraper to the bungalow on any street . . . good performance identifies PETRO.

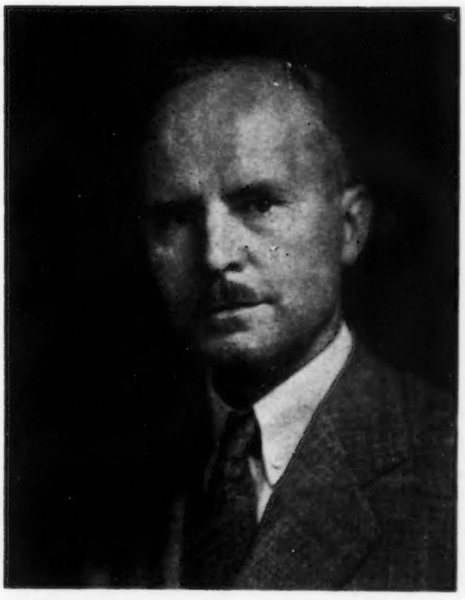

J. Floyd Yewell, of New York, is well-known both as an architect and an architectural renderer. Among outstanding industrial jobs with which his name is associated are the new plant for Walter Kidde and Company in Belleville, New Jersey; the New York, Susquehanna and Western Railroad Station in Paterson, New Jersey; and the plant for Ciba Pharmaceutical Products in Summit, New Jersey

INDUSTRIAL MODELS: No. 5 or No. 6 fuel oil; automatic, semi-automatic or manual operation; 8 sizes to 450 bhp. "Thermal Viscosity" pre-heating.

DOMESTIC MODELS: No. 3 or lighter oils; "conversion" and combination-unit types; 7 sizes. Patented "Tubular Atomization".

FULL DATA on Petro Industrial Burners are in Sweet's and Domestic Engineering catalog files. Details on Petro domestic burners available in separate catalog. Copy of either sent gladly on request.

PETRO
REG. U. S. PAT. OFF.

cuts steam costs

PETROLEUM HEAT AND POWER CO. • ***Makers of Good Oil Burning Equipment Since 1903*** • **Stamford, Connecticut**

Color Balanced Suntile puts VALUE in the Home!

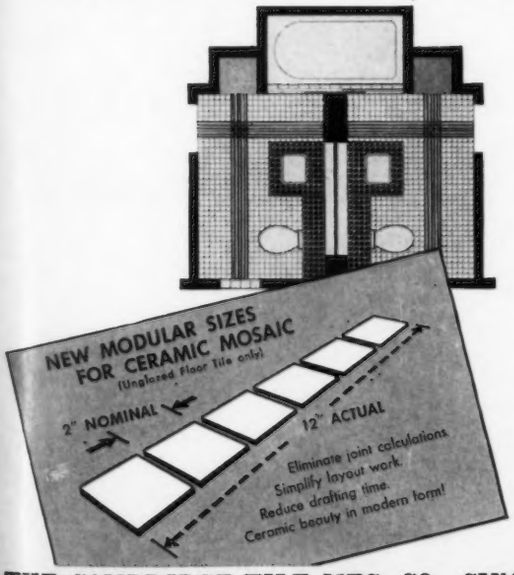

Choose Suntile for the free reign it gives your ingenuity!
Use Suntile for carefree permanence of the beauty you create!
Specify Suntile to give home owners the continuing values of low cost luxury and maintenance-free convenience . . . in Color Balanced beauty that endures!

Color Balanced **Suntile**

Bright with color · Right for life

THE CAMBRIDGE TILE MFG. CO., CINCINNATI 15, OHIO • Member of the Producer's Council

RUMFORD PRESS
CONCORD, N. H.

Like an hour glass...

The Royal never needs adjustment

Because there's nothing to adjust

The ROYAL is the *only* Flush Valve which has no adjustment or regulation. Its simplicity of engineering design, *plus* precision manufacture, insure accurate and lasting performance.

More than 4 million ROYAL Flush Valves are in daily service—including thousands of the first ROYALS installed over 36 years ago.

The ROYAL is "standard equipment" with discriminating builders and owners throughout the country. In fact, entire school systems, hotel chains, hospitals, industrial institutions, etc., use ROYALS exclusively.

For the best in Flush Valves specify Sloan—remember, there are more Sloan Flush Valves sold than all other makes combined.

SLOAN VALVE COMPANY
4300 WEST LAKE STREET, CHICAGO 24, ILLINOIS